



2810010115

CAB42FWD-V2

Floor-mounted 42HU cabinet - 800x2000x800mm (WxHxD) fixed frame

- ✓ Front metal door
- ✓ Front door handle: Double-bit lock
- ✓ Without rear door (available at request)
- ✓ Includes 2x side steel sheet panels
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. This floor-mounted 42HU cabinet is DNV-GL type approved and it's perfect for installing our 19" system components to create a complete system for your installation.


The cabinet comes with a front metal door that is hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if needed. Cabinet variant 42 HU, 800 wide and 800 deep. Internal 19-inch fixed frame for up to 42 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over modules and terminals. It comes with 3 fixed door plates, front doors, and chassis ground.

By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.


This cabinet is suitable for:

- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV
- ✓ IPTV
- ✓ DECT
- ✓ Paging
- ✓ Masterclock
- ✓ UPS (small)

Technical Dimensions

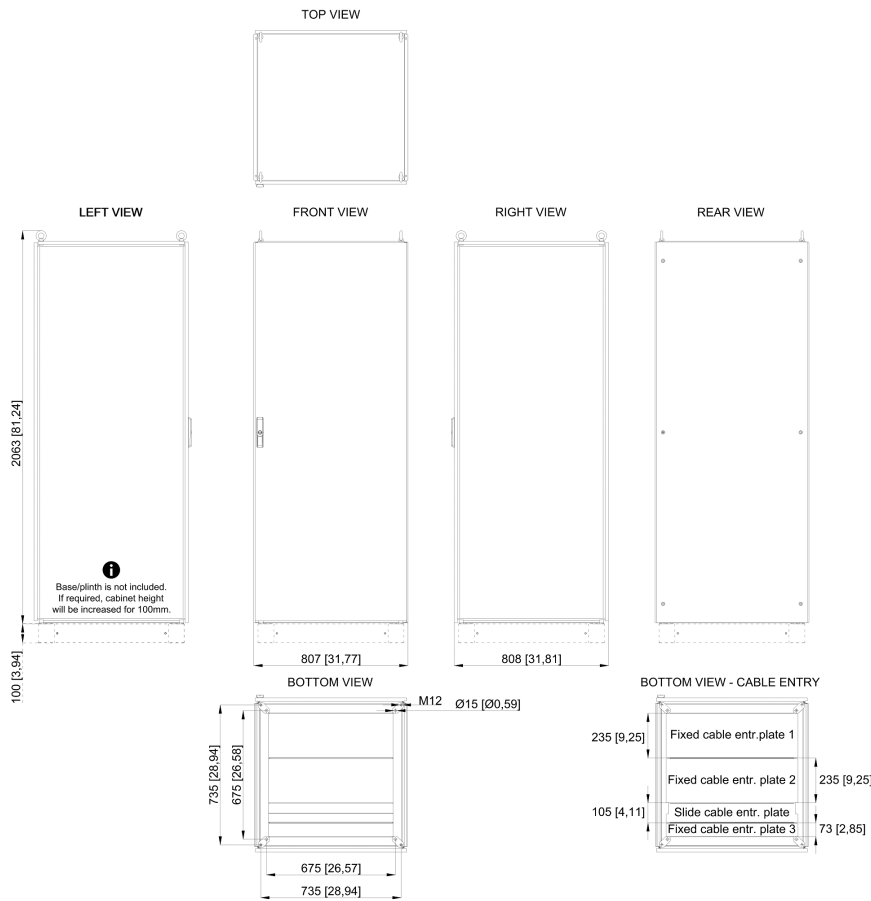

| CABINET TECHNICAL DATA | |
|------------------------|---------------------------|
| MODEL | RITTAL 8808.000 |
| COLOR: | RAL 7035 |
| BASE WEIGHT: | 230kg (500lbs) |
| BASE/PLINTH: | NO |
| VENTILATION: | NONE (DEFAULT) |
| FRONT DOORS: | METAL |
| REAR DOORS: | NONE |
| DOOR HANDLE: | DOUBLE-BIT LOCK (DEFAULT) |
| DOOR STAY: | YES |

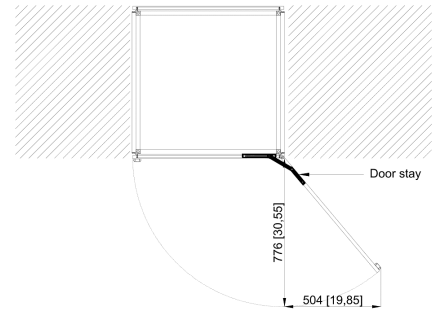

Specifications

GENERAL

| | |
|-------------------------|--|
| Dimensions (WxHxD) | 807x2163x808 mm |
| Color | RAL 7035 |
| Material | Steel |
| Ingress grade | IP-55 (or less, based on selected ventilation) |
| Mounting | Floor mounted |
| Cable inlet | Bottom (top available on request) |
| Environmental Condition | Protected |

Accessories



CAB-DH-K

Door handle with key-lock for CABxx



CAB-DH-P

Door handle with push-button for CABxx



CAB-DH-PP

Door handle with push-button & pad-lock for CABxx



CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable




CAB-AVIP55-230

Active ventilation unit IP55 for CABxx, 133mm high, 230VAC




CAB-AVIP55-115

Active IP55 ventilation for CABxx, 133mm high, 115VAC



CAB-AVF-L-230

Active ventilation for CABxx with a steel door, 230VAC



CAB-AVF-L-115

Active ventilation for CABxx with a steel door, 115VAC



CAB-AVT-115-230

Active ventilation for CABxx with glass door, 115-230VAC



CAB-1GD-42W

Cabinet glazed door 800x2000mm



CAB-2SD-42W

Cabinet double steel door 800x2000mm



CAB-1SD-42W

Cabinet steel door 800x2000mm



CAB-CE-M

Cable entry gland 14xM25/32



CAB-CE-L

Cable entry gland 2xM25/32/40, 1xM32/40/50, 2xM40/50/160



CAB-CE-S

Cable entry gland w/sealing
membranes Ø7 to 26mm



CAB-BASE-88

Base / plinth for 800x800mm
cabinets