



2810010120

CAB42SWD-V2

Floor cabinet 19" 42HU 800x800x2000mm swing frame

- ✓ Front metal door
- ✓ Front door handle: Double-bit lock
- ✓ Without rear door (available at request)
- ✓ Includes 2x side steel sheet panels
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately
- ✓ 19-inch swing frame for up to 40 HU

Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. This floor-mounted 42HU swing frame cabinet is DNV-GL type approved and it's perfect for installing our 19" system components to create a complete system for your installation.

The cabinet comes with a front metal door that is hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if needed. Cabinet variant 42 HU, 800 wide and 800 deep. Internal 19-inch fixed frame for up to 42 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over modules and terminals. It comes with 3 fixed door plates, front doors, and chassis ground.

By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.

This cabinet is suitable for:


- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV

page 1/5

- IPTV
- DECT
- Paging
- Masterclock
- UPS (small)

NOTE: Max. 200 kg capacity in swing frame!

Technical Dimensions

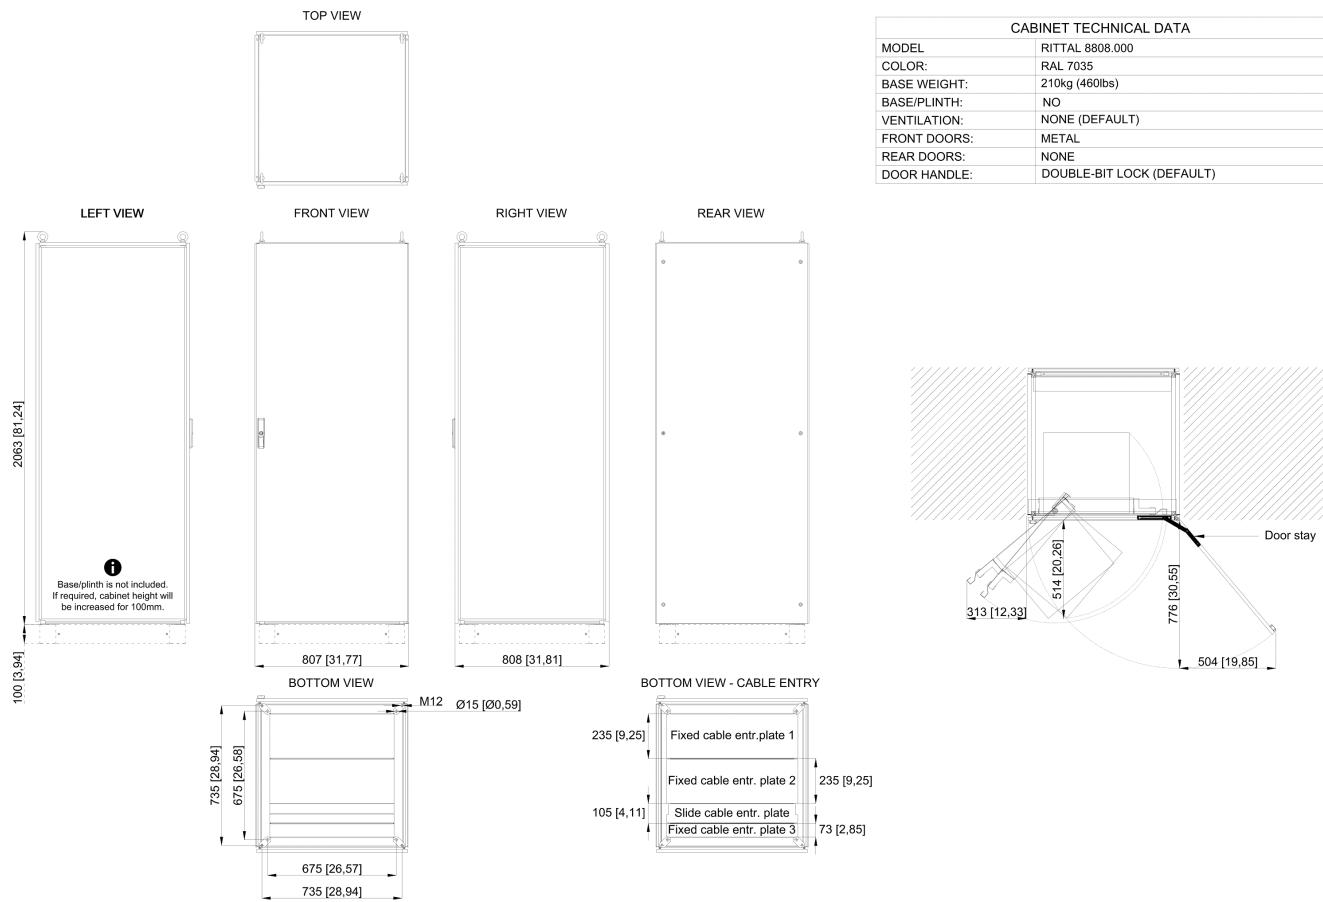

Specifications

GENERAL

Dimensions (WxDxH)	807x808x2163mm
Color	RAL 7035
Material	Steel
Ingress grade	IP-55 (or less, based on selected ventilation)
Mounting	Floor mounted
Cable inlet	Bottom (top available on request)
Environmental Condition	Protected

Accessories



CAB-1GD-42W

Cabinet glazed door
800x2000mm



CAB-2SD-42W

Cabinet double steel door
800x2000mm



CAB-1SD-42W

Cabinet steel door
800x2000mm



CAB-DH-K

Door handle with key-lock for
CABxx



CAB-DH-P

Door handle with push-button
for CABxx



CAB-DH-PP

Door handle with push-button
& pad-lock for CABxx



CAB-CE-M

Cable entry gland 14xM25/32



CAB-CE-L

Cable entry gland
2xM25/32/40, 1xM32/40/50,
2xM40/50/160



CAB-CE-S

Cable entry gland w/sealing
membranes Ø7 to 26mm



CAB-LED

CABxx LED System light
w/sensor 100-240VAC,
w/connection cable



CAB-AVIP55-115

Active IP55 ventilation for
CABxx, 133 mm height, 115
VAC



CAB-AVIP55-230

Active ventilation unit IP55 for
CABxx, 133mm height,
230VAC



CAB-AVT-115-230

Active ventilation for CABxx
with glass door, 115-230VAC





CAB-BASE-88

Base / plinth for 800x800mm cabinets

page 5/5

www.zenitel.com

info@zenitel.com

Last revision date: 2025-02-05 09:36

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend: Zenitel – All rights reserved.