

2810010116

## CAB24F-V2

Floor-mounted 24HU cabinet - 600x1200x600mm (WxHxD) fixed frame



- ✓ Front metal door
- ✓ Front door handle: Double-bit lock
- ✓ Includes 2x side & rear steel sheet panels
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

---

## Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. The cabinet is DNV-GL type approved and its perfect for installing our 19" system components to create a complete system for your installation.

The cabinet comes with a front metal door that is hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if needed. Cabinet variant 24 HU, 600 wide and 600 deep. Internal 19-inch fixed frame for up to 24 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over module and terminals. It comes with 3 fixed door plates, front doors, and chassis ground.


By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.

This cabinet is suitable for:

- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV
- ✓ IPTV
- ✓ DECT
- ✓ Paging
- ✓ Masterclock
- ✓ UPS (small)

# Technical Dimensions

CABINET TECHNICAL DATA	
MODEL:	RITTAL CUSTOM MODEL
COLOR:	RAL 7035
BASE WEIGHT:	118 kg (261 lbs)
BASE/PLINTH:	NO
VENTILATION:	NONE (DEFAULT)
FRONT DOORS:	METAL
REAR DOORS:	NONE (DEFAULT)
DOOR HANDLE:	DOOR HANDLE W/ KEY-LOCK

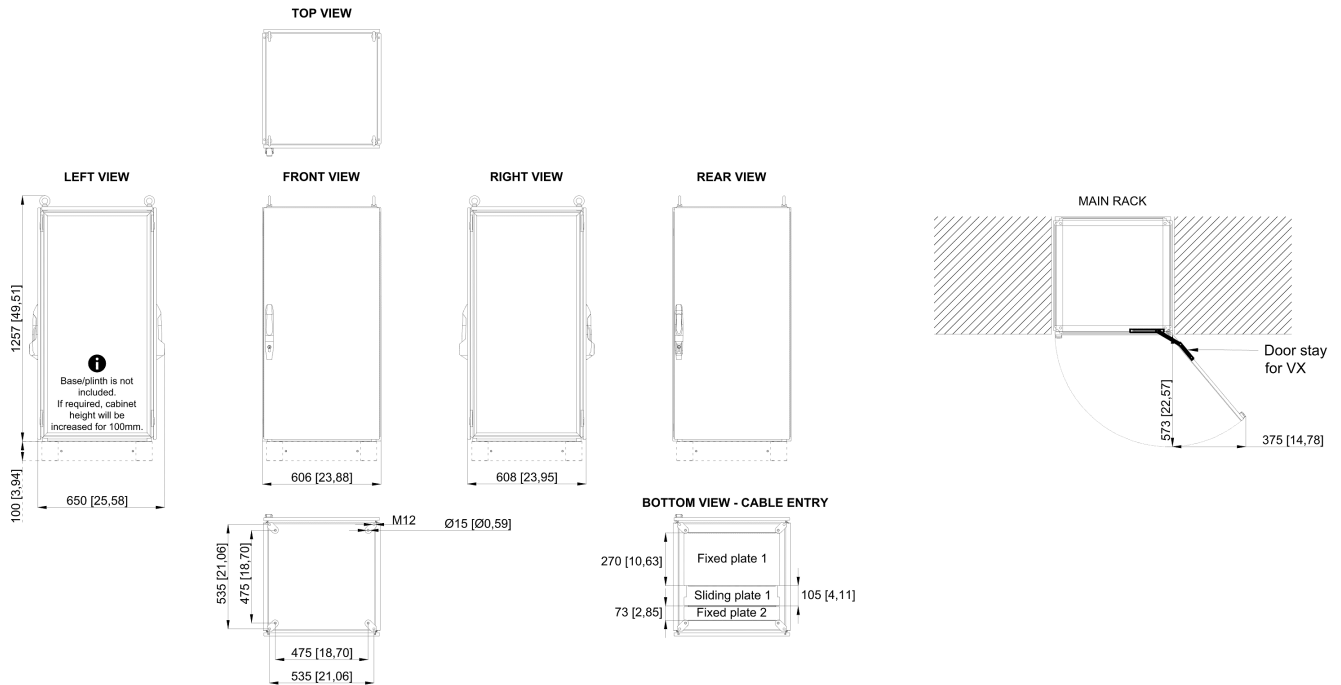

# Specifications

## GENERAL

Dimensions (WxHxD)	606x1257x650mm
Color	RAL 7035
Material	Steel
Ingress grade	IP-55 (or less, based on selected ventilation)
Mounting	Floor mounted
Cable inlet	Bottom (top available on request)
Environmental Condition	Protected

## Accessories



**CAB-DH-PP**

Door handle with push-button & pad-lock for CABxx




**CAB-DH-P**

Door handle with push-button for CABxx




**CAB-DH-K**

Door handle with key-lock for CABxx



**CAB-AVF-S-230**

Active ventilation for CABxx with a steel door, 230VAC



**CAB-AVF-S-115**

Active ventilation for CABxx with a steel door, 115VAC



**CAB-AVIP55-115**

Active IP55 ventilation for CABxx, 133mm height, 115VAC



**CAB-AVIP55-230**

Active ventilation unit IP55 for CABxx, 133mm height, 230VAC



**CAB-AVT-115-230**

Active ventilation for CABxx with glass door, 115-230VAC



**CAB-LED**

CABxx LED System light w/sensor  
100-240VAC, w/connection cable



**CAB-CE-M**

Cable entry gland 14xM25/32



**CAB-CE-L**

Cable entry gland 2xM25/32/40,  
1xM32/40/50, 2xM40/50/160



**CAB-CE-S**

Cable entry gland w/sealing  
membranes Ø7 to 26mm



**CAB-BASE-66**

Base / plinth for 600x600mm  
cabinets



**CAB-BASE-66**

Base / plinth for 600x600mm  
cabinets