



2810010123

CAB42FWDD

Floor-mounted 42HU cabinet - 800x2000x1000 (WxHxD) fixed frame

- ✓ Front door: Glazed door
- ✓ Front door handle: CAB-DH-K
- ✓ Rear door: Single steel doors
- ✓ Rear door handle: CAB-DH-K
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. This floor-mounted 42HU cabinet is DNV-GL type approved and's perfect for installing our 19" system components to create a complete system for your installation.

The cabinet comes with a front metal door that is hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if required. Cabinet variant 42 HU, 800 wide and 800 deep. Internal 19-inch fixed frame for up to 42 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over modules and terminals. It has 3 fixed door plates, front doors, and chassis ground.


Multi-part roof plate with cable entry on both sides via brush strips over the whole enclosure depth. The roof incorporates a concealed cut-out to accommodate a CAB-AVT-W-115-230 fan unit for active ventilation. The cover plate can be raised on spacer pillars to support passive ventilation if required.

This cabinet is suitable for:


- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV
- ✓ IPTV
- ✓ DECT

- ✓ Paging
- ✓ Masterclock
- ✓ UPS

Technical Dimensions

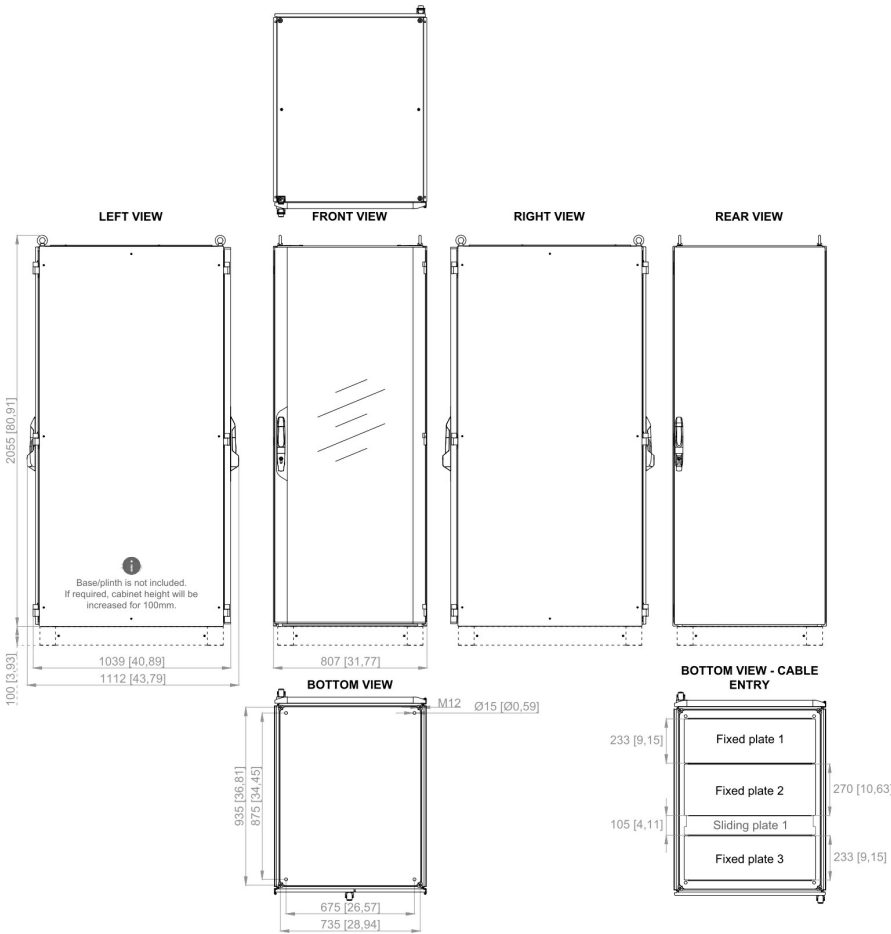

| CABINET TECHNICAL DATA | |
|------------------------|-----------------------------------|
| MODEL: | VX 5309.136 |
| COLOR: | RAL 7035 |
| BASE WEIGHT: | 185 kg [406 lbs] |
| BASE/PLINTH: | NO |
| VENTILATION: | NONE (DEFAULT) |
| FRONT DOORS: | GLAZED |
| REAR DOORS: | SINGLE STEEL DOOR |
| DOOR HANDLE: | DOOR HANDLE W/ KEY-LOCK (DEFAULT) |

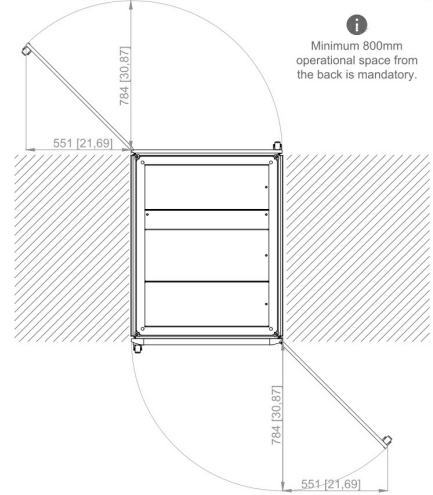

Specifications

GENERAL

| | |
|-------------------------|--|
| Dimensions (WxHxD) | 807x2056x1112 mm |
| Color | RAL 7035 |
| Material | Steel / Glazed front door |
| Cable inlet | Bottom & top |
| Ingress grade | IP-55 (or less, based on selected ventilation) |
| Mounting | Floor mounted |
| Environmental Condition | Protected |

Accessories



CAB-DH-K

Door handle with key-lock for CABxx



CAB-DH-P

Door handle with push-button for CABxx



CAB-DH-PP

Door handle with push-button & pad-lock for CABxx




CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable




CAB-AVT-115-230

Active ventilation for CABxx with glass door, 115-230VAC

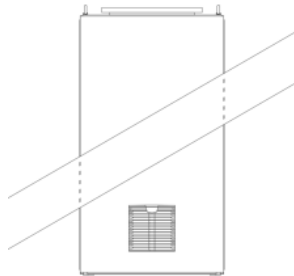

CAB-AVF-L-115

Active ventilation for CABxx with a steel door, 115VAC



CAB-AVF-L-230

Active ventilation for CABxx with a steel door, 230VAC



CAB-CE-S

Cable entry gland w/sealing membranes Ø7 to 26mm



CAB-CE-M

Cable entry gland 14xM25/32



CAB-CE-L

Cable entry gland 2xM25/32/40,
1xM32/40/50, 2xM40/50/160



CAB-1SD-42W

Cabinet steel door 800x2000mm



CAB-2SD-42W

Cabinet double steel door
800x2000mm



CAB-BASE-810

Base / plinth for 800x1000mm
cabinets