

2810010123

CAB42FWDD

Floor cabinet 19" 42HU 800x1000x2000mm fixed frame



- ✓ Front door: Glazed door
- ✓ Front door handle: CAB-DH-K
- ✓ Rear door: Single steel doors
- ✓ Rear door handle: CAB-DH-K
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

Description

Our all-new series of multi-use cabinets are designed for use in marine environments. This floor-mounted 42HU cabinet is perfect for installing our 19" system components, creating a complete system for your installation.


The cabinet comes with a front glazed door hinged on the right, which can be swapped to the left if needed. The rear side features a single metal door. The cabinet variant is 42HU, 800mm wide, and 1000mm deep, with an internal 19-inch fixed frame for up to 42HU.

This cabinet is suitable for:

- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV
- ✓ IPTV
- ✓ DECT

- ✓ Paging
- ✓ Masterclock
- ✓ UPS

Technical Dimensions

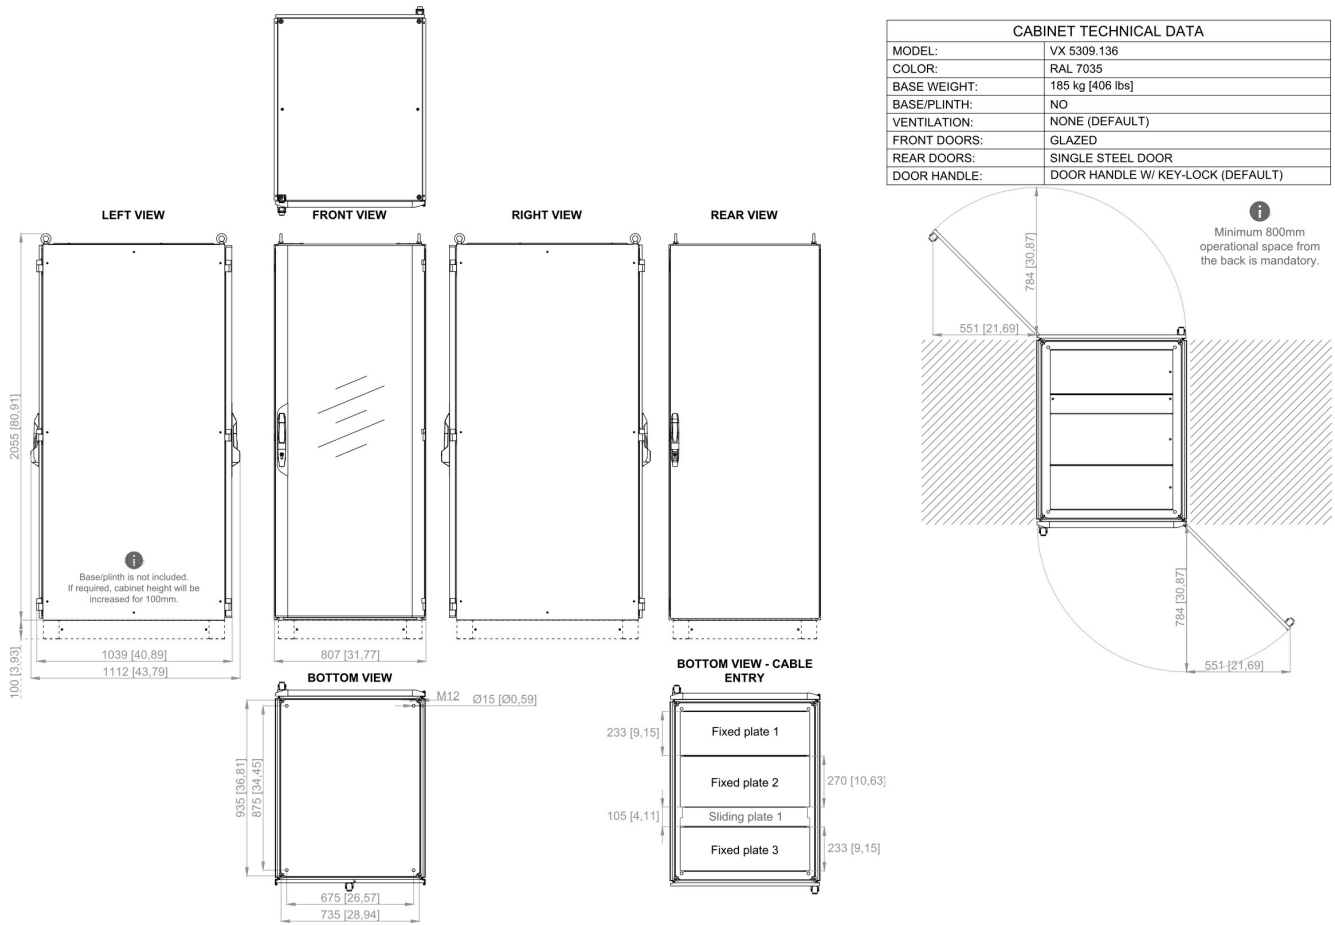

Specifications

GENERAL

Dimensions (WxDxH)	807x1112x2056 mm
Color	RAL 7035
Material	Steel / Glazed front door
Cable inlet	Bottom & top
Ingress grade	IP-55 (or less, based on selected ventilation)
Mounting	Floor mounted
Environmental Condition	Protected

Accessories



CAB-DH-P

Door handle with push-button for CABxx



CAB-DH-PP

Door handle with push-button & pad-lock for CABxx



CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable



CAB-CE-S

Cable entry gland w/sealing membranes Ø7 to 26mm



CAB-CE-M

Cable entry gland 14xM25/32



CAB-CE-L

Cable entry gland
2xM25/32/40, 1xM32/40/50,
2xM40/50/160



CAB-1SD-42W

Cabinet steel door
800x2000mm



CAB-2SD-42W

Cabinet double steel door
800x2000mm



CAB-BASE-810

Base / plinth for 800x1000mm
cabinets



CAB-AVT-W-115-230

Active ventilation for CABxx
with glass door, 115-230VAC