

2810010117

CAB24SW-V2

Floor-mounted 24HU cabinet - 800x1200x600mm (WxHxD) swing frame

- Front metal door
- Front door handle: Double-bit lock
- Includes rear and 2x side steel sheet panels
- Including 4x eyebolts for crane transportation
- The door hinged on the right, may be swapped to the left
- Base/plinth not included, can be ordered separately
- 19-inch swing frame for up to 22 HU

Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. This floor-mounted 24HU cabinet is DNV-GL type approved and perfect for installing our 19" system components to create a complete system for your installation.

The cabinet has a front metal door hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if required. Cabinet variant 24 HU, 800 wide, and 600 deep. Internal 19-inch swing frame for up to 24 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over modules and terminals. It has 3 fixed door plates, front doors, and chassis ground.

By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.

This cabinet is suitable for:

- ACM Advanced modules
- SPA-V2 Public Address
- EXIGO Public Address
- Radio
- LAN
- CCTV
- IPTV
- DECT
- Paging


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

- Masterclock
- UPS (small)

Technical Dimensions

CABINET TECHNICAL DATA	
MODEL:	RITTAL CUSTOM MODEL
COLOR:	RAL 7035
BASE WEIGHT:	131 KG (289 LBS)
BASE/PLINTH:	NO
VENTILATION:	NONE (DEFAULT)
FRONT DOORS:	METAL
REAR DOORS:	NONE (DEFAULT)
DOOR HANDLE:	DOOR HANDLE W/ KEY-LOCK

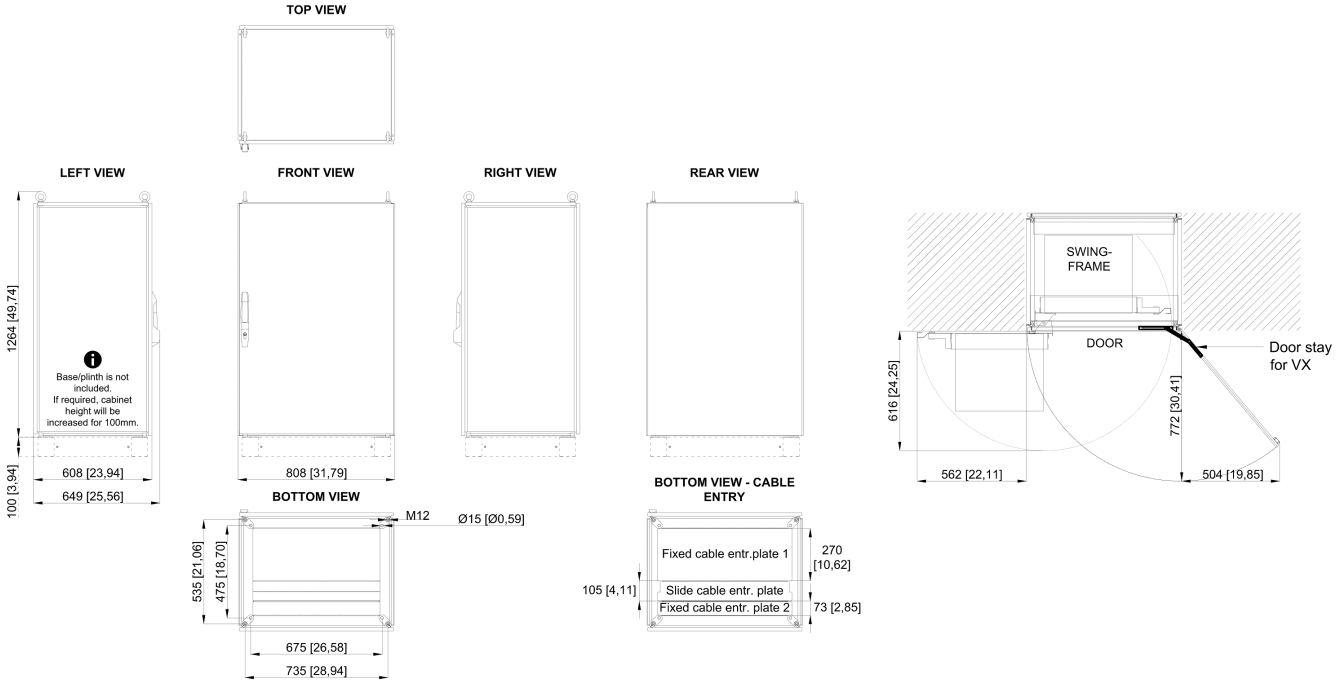

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Dimensions (WxHxD)	808x1264x649mm
Color	RAL 7035
Material	Steel
Ingress grade	IP-55 (or less, based on selected ventilation)
Mounting	Floor mounted
Cable inlet	Bottom (top available on request)
Environmental Condition	Protected

Accessories



CAB-DH-PP

Door handle with push-button & pad-lock for CABxx

Item Number: 2810011064



CAB-DH-P

Door handle with push-button for CABxx

Item Number: 2810011063



CAB-DH-K

Door handle with key-lock for CABxx

Item Number: 2810011062



CAB-CE-M

Cable entry gland 14xM25/32

Item Number: 2810011048

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



CAB-CE-L

Cable entry gland 2xM25/32/40, 1xM32/40/50, 2xM40/50/160

Item Number: 2810011049



CAB-CE-S

Cable entry gland w/sealing membranes Ø7 to 26mm

Item Number: 2810011050



CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable

Item Number: 2810011059



CAB-AVIP55-115

Active IP55 ventilation for CABxx, 133 mm height, 115 VAC

Item Number: 2810011068



CAB-AVIP55-230

Active ventilation unit IP55 for CABxx, 133mm height, 230VAC

Item Number: 2810011067



CAB-AVT-115-230

Active ventilation for CABxx with glass door, 115-230VAC

Item Number: 2810011079



CAB-BASE-86

Base / plinth for 800x600mm cabinets

Item Number: 2810011090

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.