

2810010117

CAB24SW-V2

Floor-mounted 24HU cabinet - 800x1200x600mm (WxHxD) swing frame



- ✓ Front metal door
- ✓ Front door handle: Double-bit lock
- ✓ Includes rear and 2x side steel sheet panels
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately
- ✓ 19-inch swing frame for up to 22 HU

Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. This floor-mounted 24HU cabinet is DNV-GL type approved and perfect for installing our 19" system components to create a complete system for your installation.

The cabinet has a front metal door hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if required. Cabinet variant 24 HU, 800 wide, and 600 deep. Internal 19-inch swing frame for up to 24 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over modules and terminals. It has 3 fixed door plates, front doors, and chassis ground.


By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.

This cabinet is suitable for:

- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV
- ✓ IPTV
- ✓ DECT
- ✓ Paging
- ✓ Masterclock
- ✓ UPS (small)

Technical Dimensions

| CABINET TECHNICAL DATA | |
|------------------------|-------------------------|
| MODEL: | RITTAL CUSTOM MODEL |
| COLOR: | RAL 7035 |
| BASE WEIGHT: | 131 KG (289 LBS) |
| BASE/PLINTH: | NO |
| VENTILATION: | NONE (DEFAULT) |
| FRONT DOORS: | METAL |
| REAR DOORS: | NONE (DEFAULT) |
| DOOR HANDLE: | DOOR HANDLE W/ KEY-LOCK |

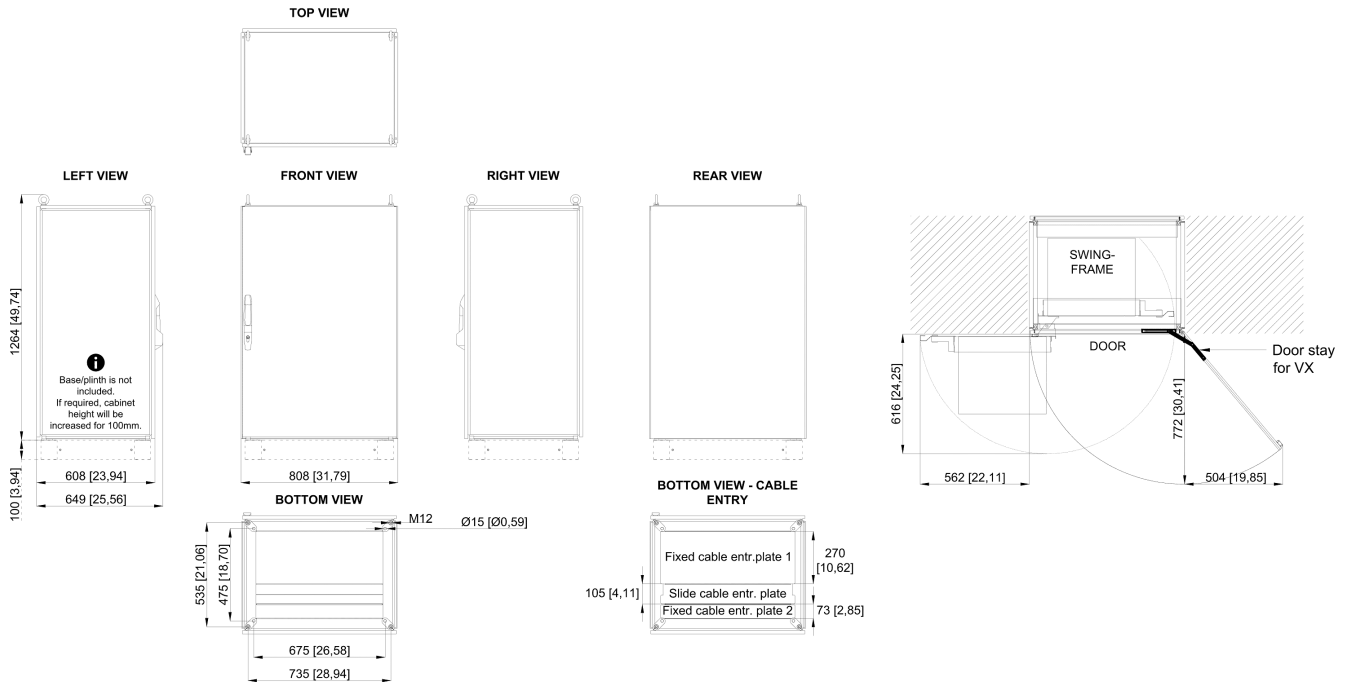

Specifications

GENERAL

| | |
|-------------------------|--|
| Dimensions (WxHxD) | 808x1264x649mm |
| Color | RAL 7035 |
| Material | Steel |
| Ingress grade | IP-55 (or less, based on selected ventilation) |
| Mounting | Floor mounted |
| Cable inlet | Bottom (top available on request) |
| Environmental Condition | Protected |

Accessories



CAB-DH-PP

Door handle with push-button & pad-lock for CABxx



CAB-DH-P

Door handle with push-button for pad-lock for CABxx



CAB-DH-K

Door handle with key-lock for CABxx



CAB-CE-M

Cable entry gland 14xM25/32



CAB-CE-L

Cable entry gland 2xM25/32/40, 1xM32/40/50, 2xM40/50/160




CAB-CE-S

Cable entry gland w/sealing membranes Ø7 to 26mm



CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable



CAB-AVF-S-115

Active ventilation for CABxx with a steel door, 115VAC



CAB-AVIP55-115

Active IP55 ventilation for CABxx,
133mm high, 115VAC



CAB-AVIP55-230

Active ventilation unit IP55 for
CABxx, 133mm high, 230VAC



CAB-AVT-115-230

Active ventilation for CABxx with
glass door, 115-230VAC



CAB-BASE-86

Base / plinth for 800x600mm
cabinets