2810011049

CAB-CE-L

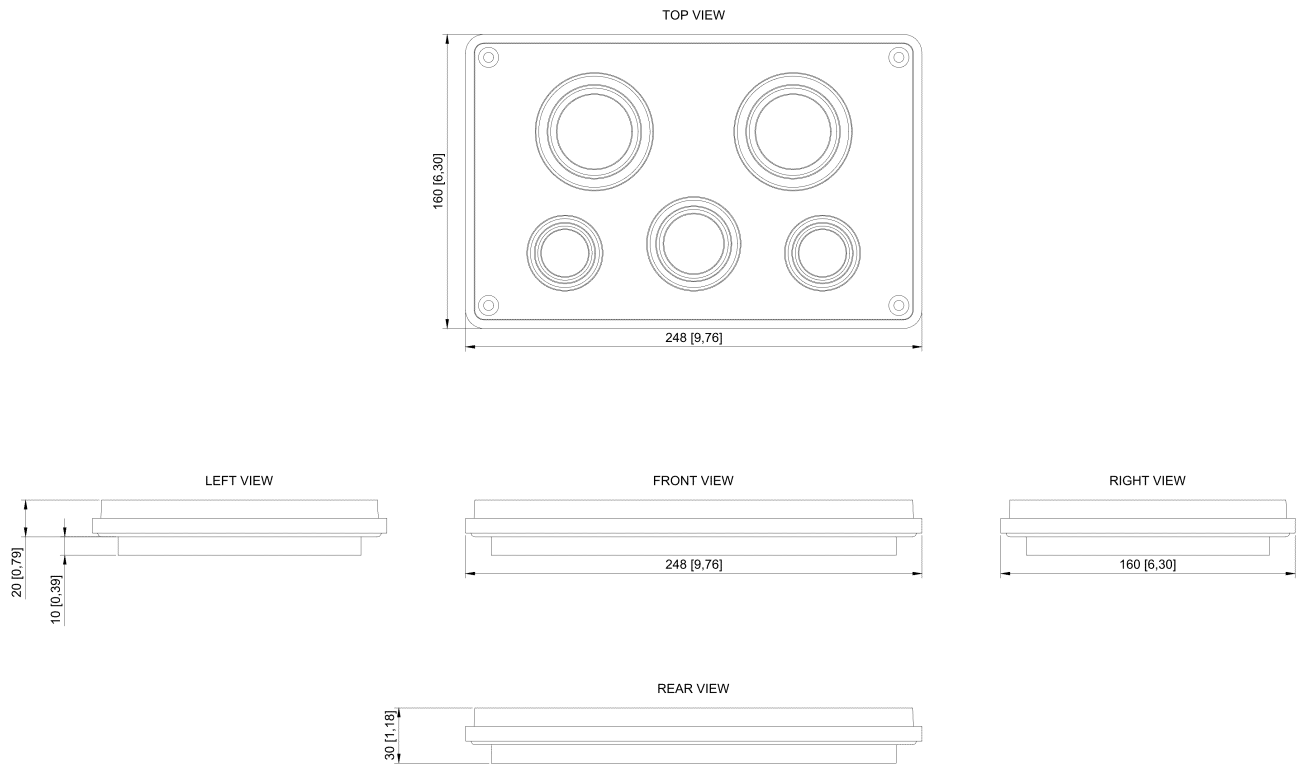Cable entry gland 2xM25/32/40, 1xM32/40/50, 2xM40/50/160

- ✓ IP55
- ✓ Width: 250 mm
- ✓ Depth: 160 mm

Description

Cable entry gland, 2xM25/32/40, 1xM32/40/50, 2xM40/50/63, insulating material. To be used for simple, secure cable entry in the roof zone. Its width of 250mm and its depth of 160mm ensures that it can fit on most of the cabinet tops. Since it has an IP grade of IP55 it's perfect for retaining a high IP grade even with a cable entrance from the top.

Fits on cabinets from the CABxx range.

Technical Dimensions

www.zenitel.com   info@zenitel.com

TOP VIEW

160 [6,30]

248 [9,76]

LEFT VIEW

20 [0,79]

10 [0,39]

FRONT VIEW

248 [9,76]

RIGHT VIEW

160 [6,30]

REAR VIEW

30 [1,18]

www.zenitel.com   info@zenitel.com

Specifications

TECHNICAL DATA

Dimensions	Width: 250 mm Depth: 160 mm
Weight	0,26 kg
IP protection	IP 55

Used With

CAB15F-V2

Floor-mounted 15HU cabinet - 600x800x600mm (WxHxD) fixed frame

CAB24FW-V2

Floor-mounted 24HU cabinet - 800x1200x600mm (WxHxD) fixed frame

CAB24FWD-V2

Floor-mounted 24HU cabinet - 800x1200x800mm (WxHxD) fixed frame

CAB42F-V2

Floor-mounted 42HU cabinet - 600x2000x600mm (WxHxD) fixed frame

CAB42FW-V2

Floor-mounted 42HU cabinet - 800x2000x600mm (WxHxD) fixed frame

CAB42FWD-V2

Floor-mounted 42HU cabinet - 800x2000x800mm (WxHxD) fixed frame

CAB24F-V2

Floor-mounted 24HU cabinet - 600x1200x600mm (WxHxD) fixed frame

CAB24SW-V2

Floor-mounted 24HU cabinet - 800x1200x600mm (WxHxD) swing frame

www.zenitel.com   info@zenitel.com

CAB42SWD-V2

Floor-mounted 42HU swing
frame cabinet -
800x2000x800mm (WxHxD)

CAB42FD-V2

Floor-mounted 42HU cabinet -
600x2000x800mm (WxHxD)
fixed frame

CAB42FWDD

Floor-mounted 42HU cabinet -
800x2000x1000 (WxHxD) fixed
frame

www.zenitel.com   info@zenitel.com