

1490004010

ITSV-4

HD IP Video Phone with 5" Screen



- ✓ 16 lines with up to 16 SIP accounts
- ✓ 5.0" (1280×720) capacitive 5-point touch screen HD TFT LCD
- ✓ Built-in 2 mega-pixel CMOS tiltable camera with privacy shutter, 720p 30fps
- ✓ 10-way audio conferencing and 3-way video conferencing capability
- ✓ Dual-mic HD speakerphone with noise reduction, advanced echo cancellation, and excellent doubletalk performance
- ✓ 4-core 1.8GHz ARM Cortex A55 processor with 2GB RAM and 16GB eMMC Flash




Description

The ITSV-4 is a powerful desktop video phone featuring Android 11, a 5" capacitive touch screen, tiltable camera, HDMI output, dual microphones, and support for 720p HD video. The ITSV-4 delivers advanced SIP telephony features and out-of-the-box integration with our IC-EDGE and ICX-AlphaCom IP intercom platforms.

[Go to Zenitel Wiki for more information](#)

Technical Dimensions

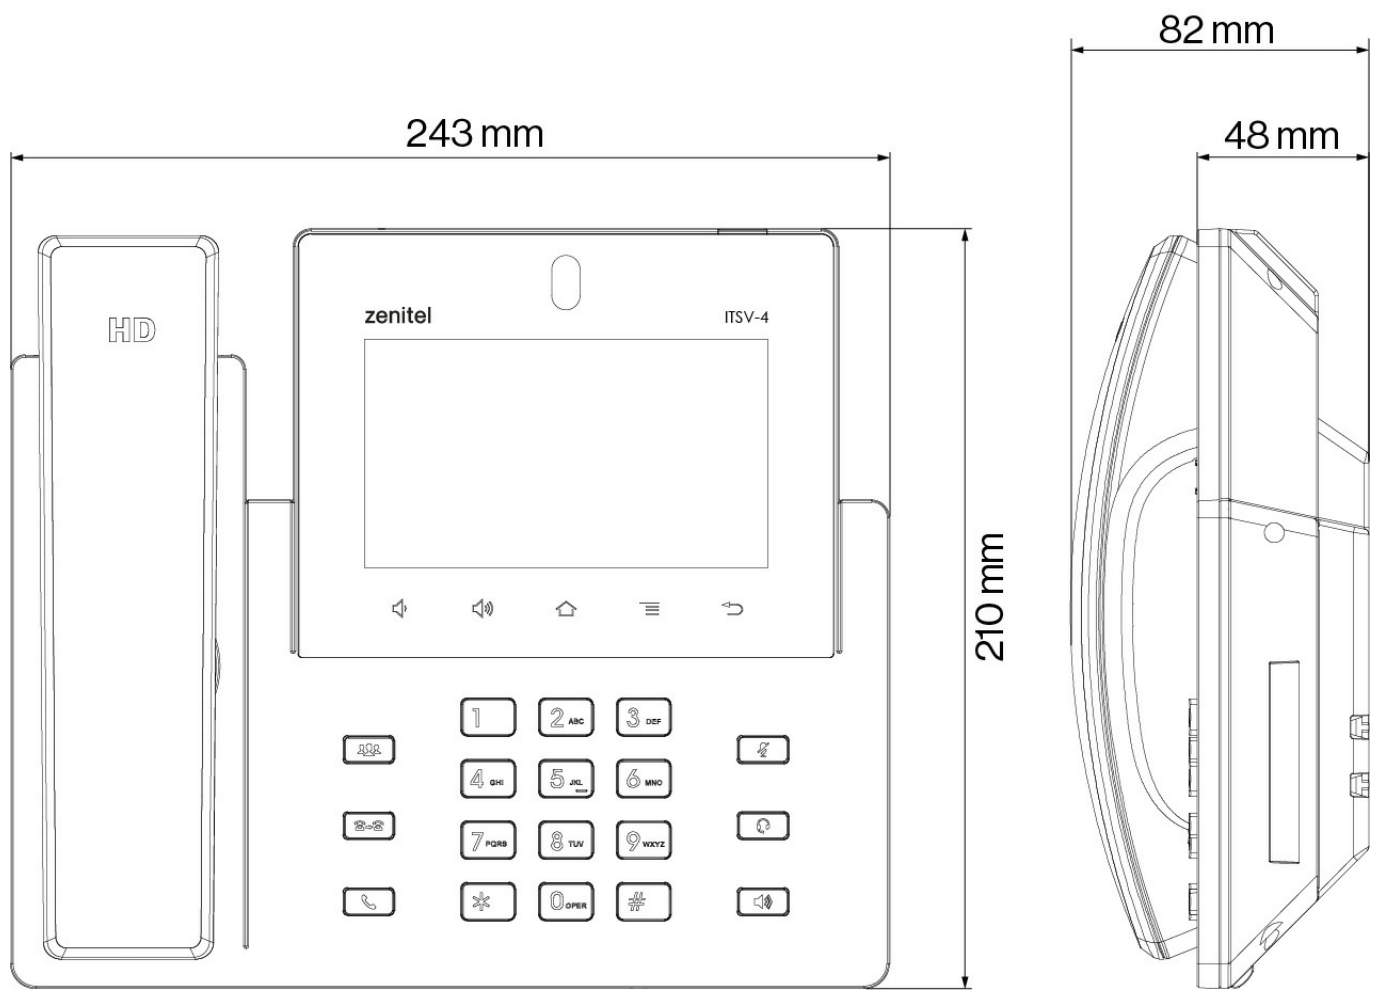

Specifications

SPECIFICATIONS

| | |
|-----------------------------|--|
| Graphic Display | 5.0 inch 1280×720 capacitive touch screen (5 points) HD TFT LCD |
| Camera | Built-in 2 mega-pixel CMOS tiltable camera with privacy wheel, 1080p 30fps |
| Auxiliary Ports | RJ9 headset jack (allowing EHS with Plantronics headsets), extension module port, USB 2.0 port, USB 3.0 port |
| Feature keys | 11 functions keys for CONFERENCE, TRANSFER, SEND/REDIAL, MUTE, EARPHONE, SPEAKERPHONE, VOLUME +/-, 3 dedicated Android keys for HOME, MENU, and BACK |
| Video Codec | H.263, H.264 BP/MP/HP |
| Video resolution | Up to 720p |
| Video frame rate | Up to 30 fps |
| Operating temperature range | 0°C to +40°C |
| Storage temperature range | -10°C to +60°C |
| Relative humidity | 10% - 90% non-condensing |
| Power options | Power over Ethernet (PoE & PoE+) or power adapter. |
| Power over Ethernet | 802.3af Class 3, 802.3at Class 4 |
| Power adapter | Input: 100-240VAC 50-60Hz; Output 12VDC 1.5A |
| Network Interface | 2 x RJ45 (Ethernet) 10/100/1000 Mbps with integrated PoE/PoE+ |
| Bluetooth | Integrated, Bluetooth 5 |
| Wi-Fi | Integrated, dual-band 2.4 & 5GHz with 802.11 a/b/g/n/ac |
| Security | User and administrator level passwords, random default admin password, MD5 and MD5-sess based authentication, 256bit-AES encrypted configuration file, TLS, SRTP, HTTPS, 802.1x media access control, anti-hacking secure boot |
| Protocols/Standards | SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A record, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, LLDP-MED, LDAP, TR-069, 802.1x, TLS, SRTP, IPv6, OpenVPN® |
| Audio technology | Wide-band Opus, wide-band G.722, G.711µ/a, G. 729A/B, G.726-32, iLBC, in-band and out-of-band DTMF (In audio, RFC2833, SIP INFO), VAD, CNG, AEC, PLC, AJB, AGC, ANS, Noise Shield 2.0 |

| | |
|--------------------|---|
| Language support | English, German, Italian, French, Spanish, Portuguese, Russian, Croatian, Chinese, Korean and Japanese |
| Compliance | FCC: Part 15 (CFR 47) Class B; UL 60950 (power adapter); Part68 (HAC) CE: EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, EN60950-1, EN62479, RoHS RCM: AS/ACIF S004; AS/NZS CISPR22/24; AS/NZS 60950; AS/NZS 4268 Safety |
| Dimensions (WxLxH) | 243 x 210 x 48 mm |
| Weight | 1 kg |
| Warranty | 2 Years standard warranty, extendible up to total of 5 years (additional fee) |

Accessories



[Wall Mount Bracket for ITSV-4](#)

Used With



[TCIV-2+](#)

IP and SIP Video Intercom



[TCIV-3+](#)

IP and SIP Video Intercom



[TCIV-5+](#)

IP and SIP Video Intercom



[TCIV-6+](#)

IP and SIP Video Intercom



[TKIV+ Video Intercom kit](#)

Turbine Video - VoIP Intercom Module



TEIV-4+

Turbine Extended IP Video with RFID
card reader space



TEIV-1+

Turbine Extended IP Video Intercom with
Keypad and Display