

2970000062

UPS-XPC-1500-120T

Tower Online UPS 1500W/30 min, 120V

This item has been replaced by: [UPS-XPC-1900-120T](#)

Description

T91 UPS provides double conversion online power for light industrial applications, point of sale, servers and voice & data networks. T91 features unity output power factor to support up to 43% more critical loads than typical UPSs.

- ✓ UL, cUL, CE, RoHS, FCC B, FCC A
- ✓ T91 provides industry highest real power rating
- ✓ Extended battery packs for runtimes up to 4 hours
- ✓ Fast Recharge: up to 95% in just 3 hours
- ✓ Multiple communications capability
- ✓ Load shedding capabilities
- ✓ Emergency power off

Item 2970000125, consists of:


- ✓ 1x T91-2000 (the UPS)
- ✓ 1x T91-BP72A (Battery pack)

Technical Dimensions


Consists of:

- 1x T91-2000 (UPS)
- 1x T91-BP72A (Battery pack)


USP FRONT VIEW




USP REAR VIEW




USP SIDE VIEW

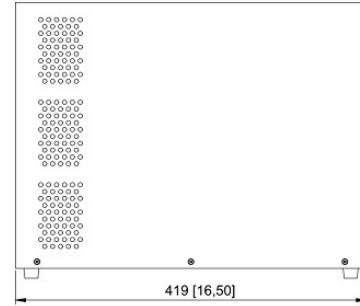


BATTERY FRONT VIEW



BATTERY REAR VIEW



BATTERY SIDE VIEW

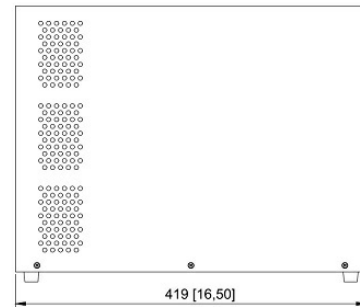

Specifications

GENERAL

Input Power rating	2000VA (1930W)
Input Voltage	55-150VAC
Input Frequency	50/60Hz auto-sensing
Output Voltage	120VAC nominal (100/110/115/127 selectable)
Frequency	50/60Hz auto-sensing \leq 1%
Efficiency	Up to 98% ECO Mode and 92% online mode
UPS, Dimensions	7.4" x 16.5" x 12.5" (W x D x H)
UPS, Weight	63 lbs
Battery type (included)	Up to 30 minutes
Battery Dimensions	7.4" x 16.5" x 12.5" (W x D x H)
Battery, Weight	82 lbs

PRODUCT VARIANTS

2970000125	Tower online UPS T91- 2000 with battery pack T91-BP72A, 1500W/30 min, 120V, wo/ bracket
2970000126	Tower online UPS T91- 3000 with two battery packs T91-BP72A, 2500W/30 min, 120V, wo/ bracket

Accessories



UPS-XPC-CARD

Dry Contact Interface Card