

2970000062

## UPS-XPC-1500-120T

Tower Online UPS 1500W/30 min, 120V

This item has been replaced by: [UPS-XPC-1900-120T](#)

## Description

T91 UPS provides double conversion online power for light industrial applications, point of sale, servers and voice & data networks. T91 features unity output power factor to support up to 43% more critical loads than typical UPSs.

- ✓ UL, cUL, CE, RoHS, FCC B, FCC A
- ✓ T91 provides industry highest real power rating
- ✓ Extended battery packs for runtimes up to 4 hours
- ✓ Fast Recharge: up to 95% in just 3 hours
- ✓ Multiple communications capability
- ✓ Load shedding capabilities
- ✓ Emergency power off

Item 2970000125, consists of:


- ✓ 1x T91-2000 (the UPS)
- ✓ 1x T91-BP72A (Battery pack)

# Technical Dimensions


Consists of:

- 1x T91-2000 (UPS)
- 1x T91-BP72A (Battery pack)


USP FRONT VIEW




USP REAR VIEW




USP SIDE VIEW

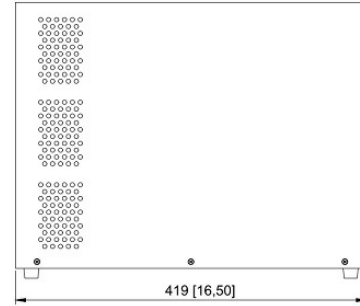


BATTERY FRONT VIEW



BATTERY REAR VIEW



BATTERY SIDE VIEW

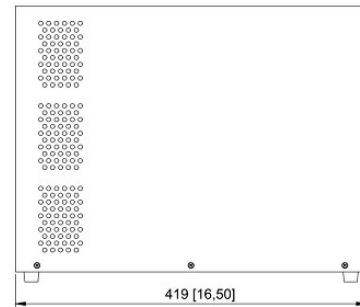

# Specifications

## GENERAL

Input Power rating	2000VA (1930W)
Input Voltage	55-150VAC
Input Frequency	50/60Hz auto-sensing
Output Voltage	120VAC nominal (100/110/115/127 selectable)
Frequency	50/60Hz auto-sensing $\leq$ 1%
Efficiency	Up to 98% ECO Mode and 92% online mode
UPS, Dimensions	7.4" x 16.5" x 12.5" (W x D x H)
UPS, Weight	63 lbs
Battery type (included)	Up to 30 minutes
Battery Dimensions	7.4" x 16.5" x 12.5" (W x D x H)
Battery, Weight	82 lbs

## PRODUCT VARIANTS

2970000125	Tower online UPS T91- 2000 with battery pack T91-BP72A, 1500W/30 min, 120V, wo/ bracket
2970000126	Tower online UPS T91- 3000 with two battery packs T91-BP72A, 2500W/30 min, 120V, wo/ bracket

## Accessories



## UPS-XPC-CARD

Dry Contact Interface Card

Item Number: 2970000204