zenitel

DATASHEET



2220015006

NV-PL-024-F

24 port IP over two-wire switch

- Upgrade to IP with re-using existing single-pair UTP cabling
- 10Mbps symmetrical and PoE over single-pair cable
- Up to 365 m between switch and endpoint
- Robust power management capabilities

Description

The NV-PL-024-F is a managed switch that represents an ideal solution for upgrading to an IP-based system or to extend the reach of any IP network. Combined with the NV-PLLK adapter the switch delivers Ethernet and PoE over a single-pair UTP cable with up to 365 m reach.


Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2025-01-28 13:34

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


REAR VIEW




LEFT SIDE VIEW




RIGHT SIDE VIEW




TOP VIEW

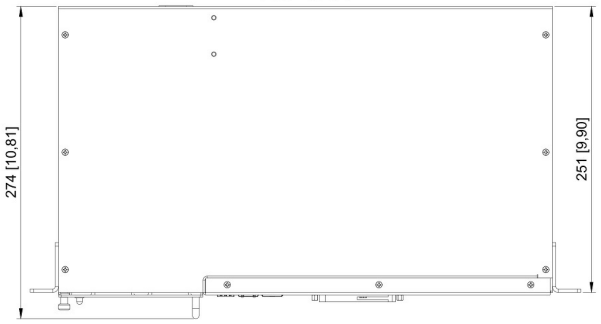

FILTER

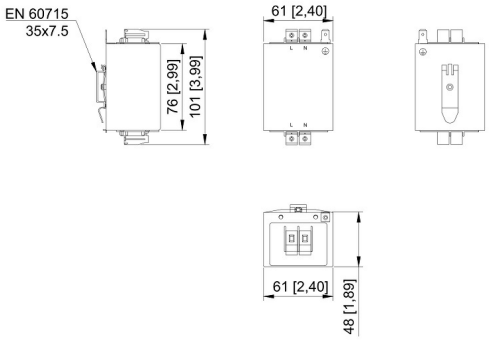

FRONT VIEW



www.zenitel.com info@zenitel.com Last revision date: 2025-01-28 13:34

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

www.zenitel.com info@zenitel.com Last revision date: 2025-01-28 13:34

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

DIMENSIONS	19 INCHES X 1HU, 252 X 435 X 44,5 MM
Weight	3,6 kg
Operating temperature	0 - 55 °C
Power supply	Unit auto-sensing 100-240VAC, 50/60 Hz Power output: 500W max at 100VAC, 1000W max at 240VAC
Power Injection (PoE)	DC voltage: 48VDC-56VDC; Endpoint devices must be compliant with IEEE 802.3af
Power consumption	34,5W (switch only)
Interface: Ethernet Uplink (Trunk IP)	Maximum 2 uplinks, each 1Gb/s (full duplex), either: 2 mini-GBIC ports: 1000 Base-TX/SX/LX/EX/ZX/LHX (determined by SFP, transceiver module installed), Ethernet IEEE 802.3z, fiber optic cable, or 2 RJ45 ports: 10/100/1000 Base-T auto-sensing, independent speed selection, Ethernet IEEE 802.3, CAT5e copper cable
Interface: Downlink (PoE and IP to Adapter)	PoLRE24: 1 RJ21 male telco connector (standard), 24 pairs used. Distance: 1200ft (365m) over CAT3 UTP cable, 24 AWG. Speed: 10 Mbps (full duplex) Power: 22 Watts
Management	1 LAN port (MGMT): RJ45, 10/100 Base-T auto-sensing, IEEE 802.3 1 UART console port: RJ45 to DB9 cable

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

PRODUCT VARIANTS

2220015006	NV-PL-024-F 24 port IP over two-wire switch, incl. net filter
2220015001	NV-PL-024 24 port IP over two-wire switch, for ICX-CAB-IP2W


Accessories



NV-PLLK-6 UTP Adapter for PoLRE switch

UTP adapter

Item Number: 2220015004



TFIE-NV-PLLK

Kit for NV-PLLK adapter in TFIE stations

Item Number: 1021010031

Used With

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



ICX-500

Intelligent Communication
Gateway with HD Voice

Item Number: 1002000100

www.zenitel.com info@zenitel.com Last revision date: 2025-01-28 13:34

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.