

2310102114

## SMT-1935 19 inch Monitor

19" Monitor CCTV



- ✓ 19" LCD monitor
- ✓ 4:3 aspect ratio
- ✓ Supports up to 1,280 x 1,024 resolution
- ✓ Video input : HDMI, VGA, BNC

---

### Description

The SMT-1935 19 inch Monitor features a 4:3 aspect ratio and supports up to 1280 x 1024 resolution. It is VESA DPM compatible. The monitor can be connected via HDMI, VGA, BNC video input. It is a high-quality LED HD monitor with protection glass suited perfectly for the maritime industry.

The screen delivers sharp image quality with an excellent viewing angle of 170° horizontal and 160° vertical. It supports NTSC/PAL video systems.

### SMT-1935 19 inch Monitor


The 19 inch display is specifically designed for professional CCTV use where precision and reliability are key prerequisites for the industry. As a result, it possesses a high dynamic contrast ratio of 1000:1 and a fast response time of 5ms.

The SMT-1935 19 inch Monitor is intended to provide the industry with a high-performance durable display solution that they can trust.

# Technical Dimensions

Dimensions

Unit : mm (inch)

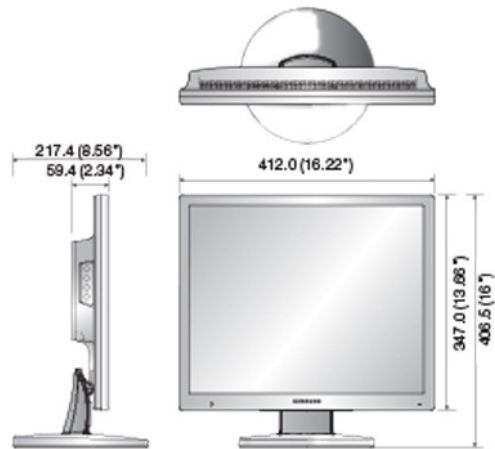

# Specifications

## DISPLAY

Type	LED
Screen Size	19"
Max. Resolution	1280 x 1024
Brightness	250cd/m2
Contrast Ratio	1,000 : 1
Aspect Ratio	4:3
Viewing Angle (H/V)	170° / 160
Display Color	16.7million
Response Time	5ms
Video System	NTSC / PAL
Panel Life	30,000 hours
Filter Type	3D combfilter

## INTERFACE

Video	Connector	BNC type (2 in / 2 out)	
	Connector	1 Analog RGB 15-pin D-sub	
	Input Signal	0.7Vpp ±5%	
VGA	Available Format	720 x 400@70Hz	
		640 x 480@60Hz/72Hz/75Hz (VGA)	
		800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)	
		1,024 x 768@60Hz/70Hz/75Hz (XGA)	
		1,152 x 864@75Hz	
		1,280 x 720@60Hz	
		1,280 x 960@60Hz	
		1,280 x 1,024@60Hz/75Hz (SXGA)	
	HDMI	Connector	1 HDMI input (Type A connector)
		Available Format	640 x 480p@60Hz, 720 x 480i@60Hz
		720 x 480p@60Hz, 720 x 576i@50Hz	
		720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz	
Audio	Connector	2 RCA type (2 stereo inputs)	
	Output Signal	Speakers : 2 x 1W	
Additional Support		Remote Control	

## ON SCREEN DISPLAY

Functions	VESATM DPM compatible
Language	English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Thai, Chinese, Japanese, Korean, Dutch, Danish, Arabic

## GENERAL

Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)
	Power Consumption	Max. 22W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	412.0 x 406.5 x 217.4mm
	Dimensions without Stand (WxHxD)	412.0 x 347.0 x 59.4mm
	Weight	4.78Kg
	Protection Glass	Yes
	Cabinet Color	Black
	Wall Mounts	Optional
	VESA Mounts Interface	100 x 100mm

## Accessories



EP-180

Ceiling mounting bracket