zenitel

DATASHEET

2310102114

SMT-1935 19 inch Monitor

19" Monitor CCTV



- 19" LCD monitor
- 4:3 aspect ratio
- Supports up to 1,280 x 1,024 resolution
- Video input : HDMI, VGA, BNC

Description

The SMT-1935 19 inch Monitor features a 4:3 aspect ratio and supports up to 1280 x 1024 resolution. It is VESA DPM compatible. The monitor can be connected via HDMI, VGA, BNC video input. It is a high-quality LED HD monitor with protection glass suited perfectly for the maritime industry.

The screen delivers sharp image quality with an excellent viewing angle of 170° horizontal and 160° vertical. It supports NTSC/PAL video systems.

SMT-1935 19 inch Monitor

The 19 inch display is specifically designed for professional CCTV use where precision and reliability are key prerequisites for the industry. As a result, it possesses a high dynamic contrast ratio of 1000:1 and a fast response time of 5ms.

The SMT-1935 19 inch Monitor is intended to provide the industry with a high-performance durable display solution


www.zenitel.com info@zenitel.com Last revision date: 2023-09-21 13:19

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

that they can trust.

Technical Dimensions

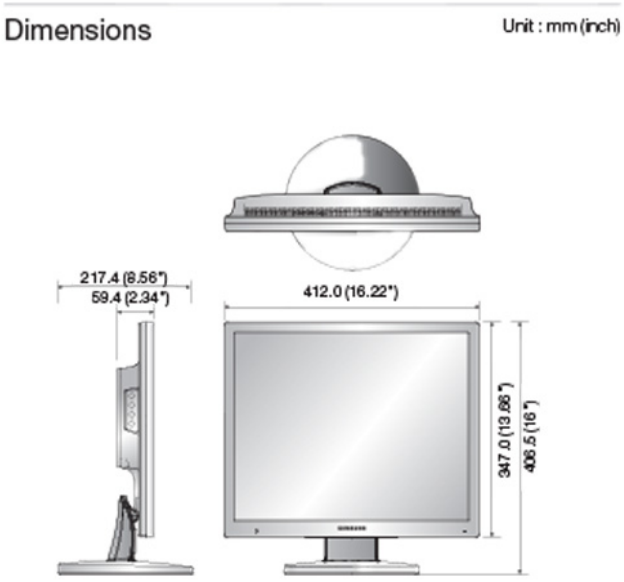

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

DISPLAY

Type	LED
Screen Size	19"
Max. Resolution	1280 x 1024
Brightness	250cd/m2
Contrast Ratio	1,000 : 1
Aspect Ratio	4:3
Viewing Angle (H/V)	170° / 160
Display Color	16.7million
Response Time	5ms
Video System	NTSC / PAL
Panel Life	30,000 hours
Filter Type	3D combfilter

www.zenitel.com info@zenitel.com Last revision date: 2023-09-21 13:19

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

INTERFACE

Video	Connector	BNC type (2 in / 2 out)
	Connector	1 Analog RGB 15-pin D-sub
	Input Signal	0.7Vpp ±5%
VGA	Available Format	720 x 400@70Hz
		640 x 480@60Hz/72Hz/75Hz (VGA)
		800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)
		1,024 x 768@60Hz/70Hz/75Hz (XGA)
		1,152 x 864@75Hz
		1,280 x 720@60Hz
		1,280 x 960@60Hz
		1,280 x 1,024@60Hz/75Hz (SXGA)
HDMI	Connector	1 HDMI input (Type A connector)
	Available Format	640 x 480p@60Hz, 720 x 480i@60Hz
		720 x 480p@60Hz, 720 x 576i@50Hz
		720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz
Audio	Connector	2 RCA type (2 stereo inputs)
	Output Signal	Speakers : 2 x 1W
Additional Support		Remote Control

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

ON SCREEN DISPLAY

Functions	VESATM DPM compatible
Language	English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Thai, Chinese, Japanese, Korean, Dutch, Danish, Arabic

GENERAL

Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)
	Power Consumption	Max. 22W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 90% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	412.0 x 406.5 x 217.4mm
	Dimensions without Stand (WxHxD)	412.0 x 347.0 x 59.4mm
	Weight	4.78Kg
	Protection Glass	Yes
	Cabinet Color	Black
	Wall Mounts	Optional
	VESA Mounts Interface	100 x 100mm

Accessories

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



EP-180

Ceiling mounting bracket

Item Number: 2310102037

www.zenitel.com info@zenitel.com Last revision date: 2023-09-21 13:19

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.