

2310102114

SMT-1935 19 inch Monitor

19" Monitor CCTV



- ✓ 19" LCD monitor
- ✓ 4:3 aspect ratio
- ✓ Supports up to 1,280 x 1,024 resolution
- ✓ Video input : HDMI, VGA, BNC

Description

The SMT-1935 19 inch Monitor features a 4:3 aspect ratio and supports up to 1280 x 1024 resolution. It is VESA DPM compatible. The monitor can be connected via HDMI, VGA, BNC video input. It is a high-quality LED HD monitor with protection glass suited perfectly for the maritime industry.

The screen delivers sharp image quality with an excellent viewing angle of 170° horizontal and 160° vertical. It supports NTSC/PAL video systems.

SMT-1935 19 inch Monitor


The 19 inch display is specifically designed for professional CCTV use where precision and reliability are key prerequisites for the industry. As a result, it possesses a high dynamic contrast ratio of 1000:1 and a fast response time of 5ms.

The SMT-1935 19 inch Monitor is intended to provide the industry with a high-performance durable display solution that they can trust.

Technical Dimensions

Dimensions

Unit : mm (inch)

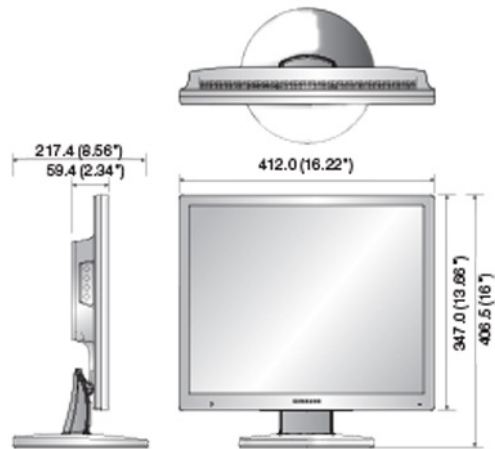

Specifications

DISPLAY

| | |
|---------------------|---------------|
| Type | LED |
| Screen Size | 19" |
| Max. Resolution | 1280 x 1024 |
| Brightness | 250cd/m2 |
| Contrast Ratio | 1,000 : 1 |
| Aspect Ratio | 4:3 |
| Viewing Angle (H/V) | 170° / 160 |
| Display Color | 16.7million |
| Response Time | 5ms |
| Video System | NTSC / PAL |
| Panel Life | 30,000 hours |
| Filter Type | 3D combfilter |

INTERFACE

| | | | |
|--------------------|------------------|-----------------------------------------|----------------------------------|
| Video | Connector | BNC type (2 in / 2 out) | |
| | Connector | 1 Analog RGB 15-pin D-sub | |
| | Input Signal | 0.7Vpp ±5% | |
| VGA | Available Format | 720 x 400@70Hz | |
| | | 640 x 480@60Hz/72Hz/75Hz (VGA) | |
| | | 800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA) | |
| | | 1,024 x 768@60Hz/70Hz/75Hz (XGA) | |
| | | 1,152 x 864@75Hz | |
| | | 1,280 x 720@60Hz | |
| | | 1,280 x 960@60Hz | |
| | | 1,280 x 1,024@60Hz/75Hz (SXGA) | |
| | HDMI | Connector | 1 HDMI input (Type A connector) |
| | | Available Format | 640 x 480p@60Hz, 720 x 480i@60Hz |
| | | 720 x 480p@60Hz, 720 x 576i@50Hz | |
| | | 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz | |
| Audio | Connector | 2 RCA type (2 stereo inputs) | |
| | Output Signal | Speakers : 2 x 1W | |
| Additional Support | | Remote Control | |

ON SCREEN DISPLAY

| | |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------|
| Functions | VESATM DPM compatible |
| Language | English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkish, Thai, Chinese, Japanese, Korean, Dutch, Danish, Arabic |

GENERAL

| | | |
|---------------|----------------------------------|----------------------------|
| Electrical | Input Voltage | 100 ~ 240V AC (50/60Hz) |
| | Power Consumption | Max. 22W |
| Environmental | Operating Temperature | 0 ~ +40°C (+32°F ~ +104°F) |
| | Operating Humidity | 20% ~ 90% (Non-condensing) |
| Mechanical | Dimensions with Stand (WxHxD) | 412.0 x 406.5 x 217.4mm |
| | Dimensions without Stand (WxHxD) | 412.0 x 347.0 x 59.4mm |
| | Weight | 4.78Kg |
| | Protection Glass | Yes |
| | Cabinet Color | Black |
| | Wall Mounts | Optional |
| | VESA Mounts Interface | 100 x 100mm |

Accessories



EP-180

Ceiling mounting bracket

Item Number: 2310102037