

2310111166

## DS-6701HUHI One channel Video to IP encoder

### Encoder

- ✓ Self-adaptive HDTV/HDCVI/AHD/CVBS signal input
- ✓ Up to 5 MP HDTV video input and live view
- ✓ Full channel recording at up to 5 MP resolution



## Description

The DS-6701HUHI One channel Video to IP encoder features self-adaptive HDTV/HDCVI/AHD/CVBS signal input with up to 5 MP HDTV video input and live view and long distance transmission over UTP and coaxial cable.


The encoder features H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264/MJPEG for the sub-stream of analog cameras.

### DS-6701HUHI One Channel Video to IP Encoder

It has a 1 micro SD card slot (8G up to 128 GB capacity) that allows for searching and playing back recorded files by camera number, recording type, start time, end time, etc. It supports smart functions including line crossing detection, intrusion detection, sudden scene change detection, and audio exception detection.

## Technical Dimensions

## Physical Interfaces

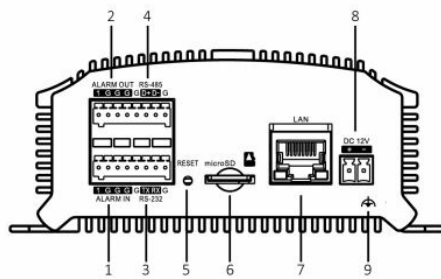

### NOTE

The rear panel of DS-6704HUHI provides 4 alarm in and 2 alarm out interfaces.

Index	Description	Index	Description
1	Alarm In	6	Micro SD Card Slot
2	Alarm Out	7	LAN Network Interface
3	RS-232 Serial Interface	8	12 VDC Power Input
4	RS-485 Serial Interface	9	GND
5	RESET		

# Specifications

## DESCRIPTION

Video Compression	MJPEG (sub-stream)/H.265+/H.265/H.264+/H.264
Video input	1-ch, BNC (1.0 Vp-p, 75 Ω), supporting coaxitron connection
Audio compression	G.711u
Audio input	1-ch, 3.5mm interface (2.0 Vp-p, 1 kΩ) (LINE IN)
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1st audio input)
Audio output	1-ch, RCA (Linear, 1 KΩ)
Synchronous Playback	1-ch
Frame rate	Main stream: 5 MP@12fps / 4 MP@15fps / 3 MP@18fps 1080p / 720p / WD1/4CIF / VGA / CIF@25fps (P) / 30fps (N), Sub-stream: WD1 / 4CIF / CIF@25fps (P) / 30fps (N)
Video bit rate	32 Kbps to 10 Mbps
Audio bit rate	64 Kbps
Alarm in/Alarm out	1/1
Power supply	12 VDC
Consumption	≤ 15 W
Dimension(W×D×H)	162.5 × 114 × 47.5 mm
Weight	≤ 1.5 Kg
Working temperature	-10°C~+55°C
Working humidity	10% to 90%

## OTHER MODELS

2310111139	DS-6704HWI Four channel Video to IP encoder
------------	---