2310111166

DS-6701HUHI One channel Video to IP encoder

Encoder



- Self-adaptive HDTVI/HDCVI/AHD/CVBS signal input
- Up to 5 MP HDTVI video input and live view
- Full channel recording at up to 5 MP resolution

H.264

Description

The DS-6701HUHI One channel Video to IP encoder features self-adaptive HDTVI/HDCVI/AHD/CVBS signal input with up to 5 MP HDTVI video input and live view and long distance transmission over UTP and coaxial cable.

The encoder features H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264/MJPEG for the sub-stream of analog cameras.

DS-6701HUHI One Channel Video to IP Encoder

It has a 1 micro SD card slot (8G up to 128 GB capacity) that allows for searching and playing back recorded files by camera number, recording type, start time, end time, etc. It supports smart functions including line crossing detection, intrusion detection, sudden scene change detection, and audio exception detection.


Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2023-09-21 13:40

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Physical Interfaces

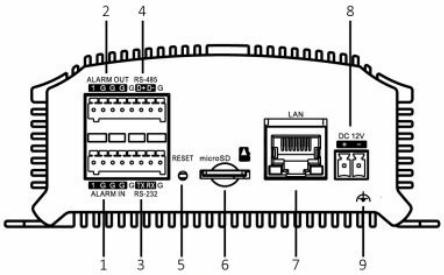

NOTE

The rear panel of DS-6704HUHI provides 4 alarm in and 2 alarm out interfaces.

Index	Description	Index	Description
1	Alarm In	6	Micro SD Card Slot
2	Alarm Out	7	LAN Network Interface
3	RS-232 Serial Interface	8	12 VDC Power Input
4	RS-485 Serial Interface	9	GND
5	RESET		

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

DESCRIPTION	
Video Compression	MJPEG (sub-stream)/H.265+/H.265/H.264+/H.264
Video input	1-ch, BNC (1.0 Vp-p, 75 Ω),supporting coaxitron connection
Audio compression	G.711u
Audio input	1-ch, 3.5mm interface (2.0 Vp-p, 1 kΩ) (LINE IN)
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1st audio input)
Audio output	1-ch, RCA (Linear, 1 KΩ)
Synchronous Playback	1-ch
Frame rate	Main stream: 5 MP@12fps / 4 MP@15fps / 3 MP@18fps 1080p / 720p / WD1/4CIF / VGA / CIF@25fps (P) / 30fps (N), Sub-stream: WD1 / 4CIF / CIF@25fps (P) / 30fps (N)
Video bit rate	32 Kbps to 10 Mbps
Audio bit rate	64 Kbps
Alarm in/Alarm out	1/1
Power supply	12 VDC
Consumption	≤ 15 W
Dimension(W×D×H)	162.5 × 114 × 47.5 mm
Weight	≤ 1.5 Kg
Working temperature	-10°C~+55°C
Working humidity	10% to 90%

OTHER MODELS	
2310111139	DS-6704HWI Four channel Video to IP encoder

www.zenitel.com info@zenitel.com Last revision date: 2023-09-21 13:40

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.