

2310120110

SMT-3233 32 inch Monitor LED Full HD

32" Monitor

- Supports up to 1,920 x 1,080 resolution
- Contrast ratio 1,200 : 1
- HDMI, DVI, VGA, BNC

Description


The SMT-3233 32 inch Monitor LED Full HD supports up to 1,920 x 1,080 resolution with a contrast ratio of 1,200 :1. It has a fast response time of 8ms and panel life of 30,000 hours.

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2023-09-22 09:30

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

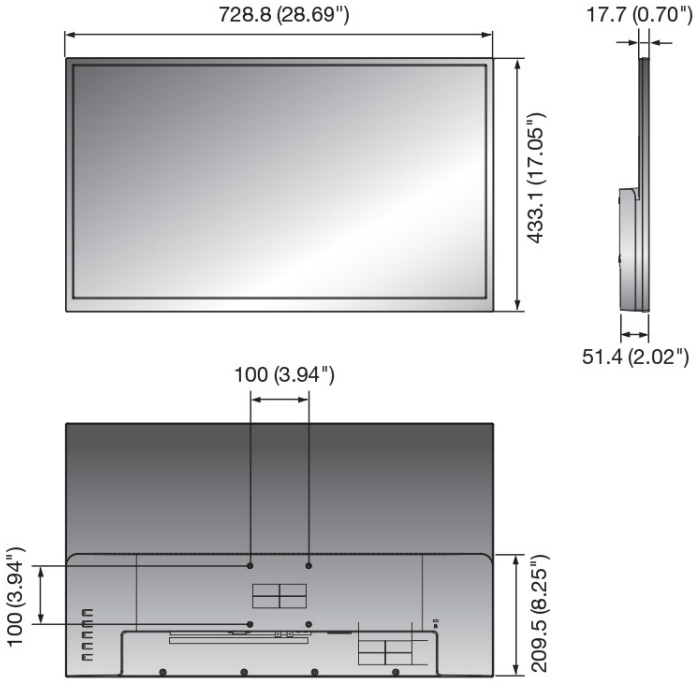

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

DISPLAY	
Screen Size	31.5"
Max. Resolution	1,920 x 1,080
Brightness	350 cd/m2
Contrast Ratio	1,200 : 1
Aspect Ratio	16:9
Viewing Angle (H/V)	178° / 178°
Display Color	16.7 million
Response Time	8 ms
Video System	NTSC/PAL
Panel Life	30,000 hours
Filter Type	3D combfilter

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

INTERFACE

Video	Connector: VGA, DVI, HDMI, BNC
	Connector: Analogue D-sub (15 pin), DVI-D
	Input Signal: 0.7Vpp ±5%
RGB/DVI	Available Format: 640 x 480 @ 60Hz / 72Hz / 75Hz (VGA), 800 x 600 @ 56Hz / 60Hz / 72Hz / 75Hz (SVGA), 1,024 x 768 @ 60Hz / 70Hz / 75Hz (XGA), 1,152 x 864 @ 75Hz, 1,280 x 720 @ 60Hz, 1,280 x 800 @ 60Hz, 1,280 x 1,024@60Hz/75Hz (SXGA), 1,360 x 768@60Hz, 1,440 x 900@60Hz, 1,600 x 900@60Hz, 1,680 x 1,050@60Hz, 1,920 x 1,080@60Hz
HDMI	Available Format: 640 x 480p @ 60Hz, 720 x 480p @ 60Hz, 720 x 576p @ 50Hz, 1,280 x 720p @ 50Hz / 60Hz, 1,920 x 1,080 @ 60Hz, 1,920 x 1,080p @ 60Hz
Audio Connector	3.5 mm Mini phone jack
Audio Output Signal	Loop-through line level (PC only), Speakers : 2 x 2W
Application Support	Remote controller

ON SCREEN DISPLAY

Functions	VESA™ DPM compatible
Language	Chinese (Simplified), English, French, German, Spanish, Dutch, Russian, Arabic

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

GENERAL

Input Voltage	100 ~ 240V AC (50/60Hz)
Power Consumption	< 50W
Operating Temperature	0°C ~ +40°C
Operating Humidity	10% ~ 80% (Non-condensing)
Dimensions without stand (W x H x D)	728.8 x 433.1 x 51.4 mm
Bezel Size	Top 14.5mm (0.57") / Bottom 25mm (0.98")
Cabinet Color	Black
VESA Mounts Interface	100 x 100 mm

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.