zenitel

DATASHEET



2310102126

MarinMON 19" Panel Mount Monitor

Flush Mount Monitor

- Dimmable 10 -350 nits
- 19” steel enclosed industrial display
- IP65 compliant front bezel
- VESA mount 75 x 75
- Anti-reflection glass in front for protection
- Default AC 100~240V input / DC 11~32V input

Description

The MarinMON 19" Panel Mount Monitor with 1280 x 1024 has a default input of VGA, DVI, RCA, and S-Video. It features a 19 inch steel enclosed industrial display with a IP65 compliant front bezel.


Technical Dimensions

www.zenitel.com info@zenitel.com

Last revision date: 2023-09-22 09:46

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

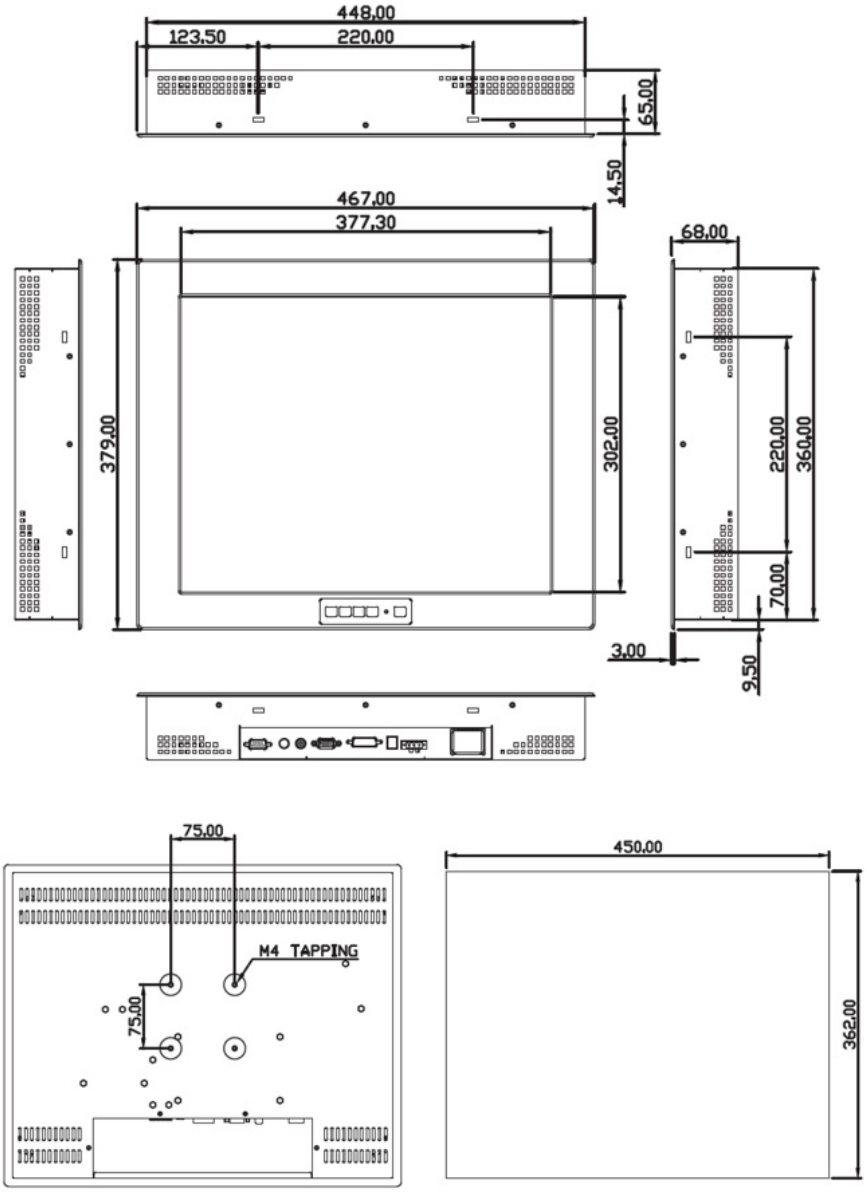

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

LCD

Display Type	19" TFT LCD
Max. Resolution	1280 x 1024
Max. Color	16.7M
Contrast Ratio	1000 : 1
View Angle	170 (H) / 160 (V)
Backlight Lifetime	50,000 hours
Luminance	350 nits

MECHANICAL

Construction	Black Steel Front Panel, Option Front Bezel: 304 S.S / 316L S.S. / Aluminum Chassis Black Steel Back Cover
Mounting	Panel mount / VESA mount 75 x 75 / Rack Mount (option)
IP Rating	Front side IP65
Dimensions	467 x 379 x 68 mm
Net Weight	7. 6 kg

ENVIRONMENTAL

Operating Temperature	0~50° C
Storage Temperature	-20~ 60 °C
Storage Humidity	10~90 % @ 40 °C non- condensing
Certificate	CE / FCC Class A
Default Inputs	DVI, VGA, CV, and YC

www.zenitel.com info@zenitel.com Last revision date: 2023-09-22 09:46

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.