zenitel

DATASHEET



2200001003

FXS-GW-24P

24 port FXS gateway

- SIP interface to ICX-Alphacom
- TLS and SRTP security encryption
- Failover SIP server

ICX ICX-AlphaCom

Description

The Zenitel FXS-GW-24P FXS gateway enables installations of all sizes to create a cost-effective hybrid IP and analog telephone system that offers the benefits of VoIP communications and takes advantage of Gigabit speeds.

The Zenitel FXS-GW-24P includes 24 FXS ports, a Gigabit network port and and full integration with the ICX-Alphacom communication system.


Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-03-05 10:40


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


REAR VIEW




TOP VIEW

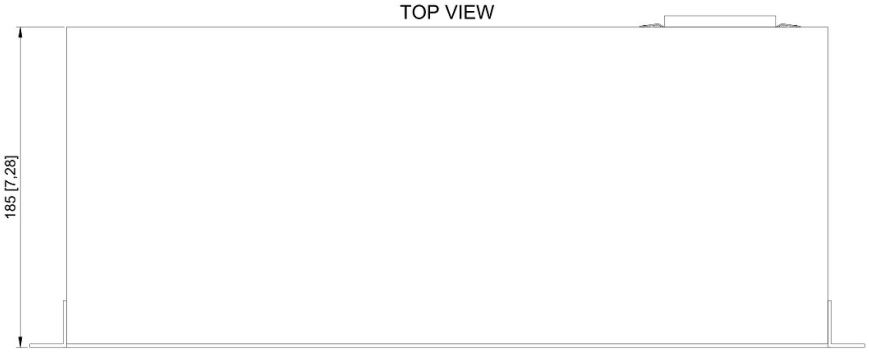

FRONT VIEW

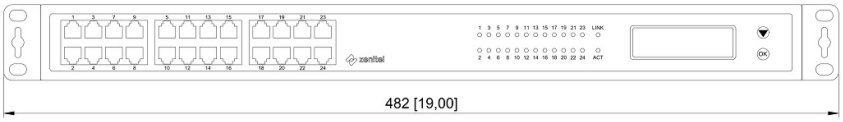

SIDE VIEW



Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

www.zenitel.com info@zenitel.com Last revision date: 2026-03-05 10:40

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

GENERAL

Dimension (WxDxH)	440 x 185 x 44mm (1U)
Weight	2.63kg
Mounting	Desktop and rack mount with front brackets
LED Indicators	Power, LAN Link/Activity, Hard Drive Activity, Connection per port
Telephone Interfaces	24 x RJ11 & 1 x 50-pin Telco connectors
Network Interfaces	1 x 10M/100M/1000Mbps auto-sensing RJ45 port
LCD display	Backlit 128x32 graphic LCD display
Voice-over-Packet Capabilities	Window based carrier grade line echo cancellation, dynamic jitter buffer
QoS	DiffServ, TOS, 802.1P/Q VLAN tagging
Security	SRTP, TLS/SIPS, HTTPS, 802.1x
Management	Syslog, HTTPS, Web browser, voice prompt, TR-06
Power Supply	Output: 12VDC, 5A; Input: 100 ~ 240VAC, 50 ~ 60Hz
Operating temperature	-15 °C - 55 °C
Max cable length to telephone	1800 m

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Used With



ICX-500

Intelligent Communication
Gateway with HD Voice

Item Number: 1002000100

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.