

2340110034

## SPA-M1-D

PA Panel Dual, All-Call, Flush, Green Backlight



### Onboard communication

## Description


- ✓ PA Panel for dual system , all call
- ✓ Built-in pre-amplifier with preset signal level and tone controls
- ✓ TALK button on panel
- ✓ Flush mounting, back box for wall mounting is available
- ✓ Local mute contact for external loudspeaker
- ✓ Buttons backlight with green illumination

This panel gives All Call Message in a SPA-V2 public address and general alarm dual system.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. This function must be in combination with relay box.

Note: Microphone must be ordered separately.

## Technical Dimensions

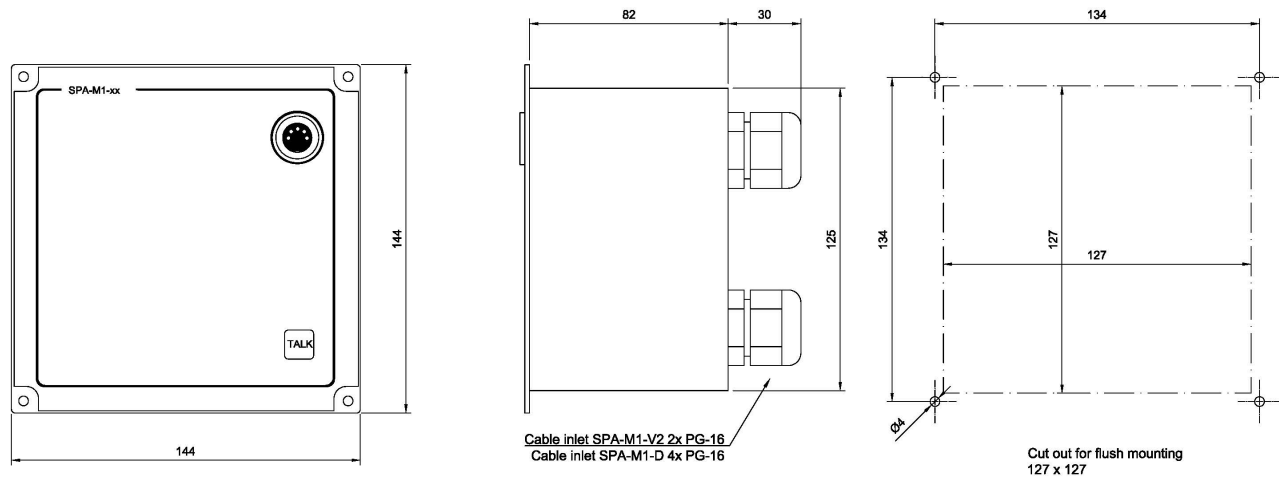

**Related item:**

SPA-M6BOKS Wall mounting box for SPA-M1/M6 panels Item.no. 3005010155

MB-30G Gooseneck Microphone Item.no.3005020033


ETC-1-TB Hand Microphone Item.no.3005020029

# Specifications

## GENERAL

Size (WxHxD)	144 x 144 x 82 mm
Weight w/microphone	0.5 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775Vrms / 0dB
Connections	Plugable screw terminals for 2.5 mm <sup>2</sup> cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75mm <sup>2</sup>
Local mute relay, output	24V DC @ maximum 50 mA
IP-rating	IP-44
Operating temperature	-15°C to +55°C

## Accessories



### SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels



### MB-30G

Gooseneck Microphone



### PAM2H

Handheld Microphone for SPA-V2 indoor panels.