



### 2340110035

# SPA-M6-V2

PA Panel Single with 6 zones, All Call, Dimmer, Flush, Green Backlight

- ✓ PA panel for single system
- Built-in pre-amplifier with preset signal level and tone controls
- 6 zone selection buttons
- ALL, TALK and dimmer buttons.
- Replaceable text label to each zone button
- Zone buttons have activation confirmation light
- Flush mounting, back box for wall mounting is available
- Local mute contact for external loudspeaker
- Buttons backlight with green illumination



Onboard communication

# Description


Zenitel SPA-M6 V2 Panel gives messages in one to six zones in a SPA-V2 public address and general alarm single system. Installation in consoles or on-wall indoor.


Function Local mute is used for instances where feedback is caused by close proximity between a PA panel and a loudspeaker. This function must be in combination with relay box.

Note: Microphone must be ordered separately.

# **Technical Dimensions**

certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.



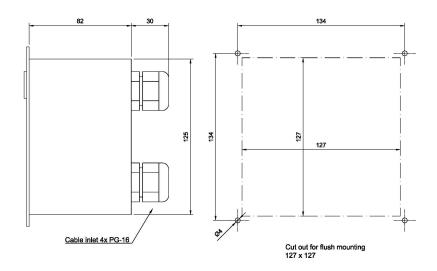


Related Item:
SPA-M6BOKS Wall mounting box for SPA-M1/M6 panels Item.no. 3005010155
MB-30G Gooseneck Microphone Item.no.3005020033
ETC-1-TB Hand Microphone Item.no.3005020029

# Specifications

#### **GENERAL**

Size (WxHxD)	144 x 144 x 82
Weight w/microphone	0. 5 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775Vrms / 0dB
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75 mm2
Local mute relay, output	24V DC @ maximum 50mA
IP-rating	IP-44
Operating temperature	-15°C to +55°C

# Accessories







## SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels

## MB-30G

Gooseneck Microphone

## PAM2H

Handheld Microphone for SPA-V2 indoor panels.