

2131000105

BPF-660TF

Ceiling loudspeaker 6W 70/100V w/fuse




- ✔ 70V / 100V line
- ✔ Tapping: 0,5W - 1,5W - 3W - 6W



Description

Our new improved mounting system makes this the most flexible 6" ceiling speaker DNH A/S has made. The hooks are changeable to set upside down, allowing up to 55 mm on the ceiling thickness. The easy mounted dust box has a M20 gland and a M20 blanking plug on the side as standard.

Technical Dimensions

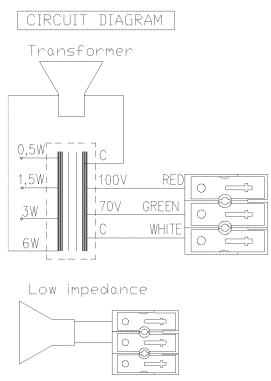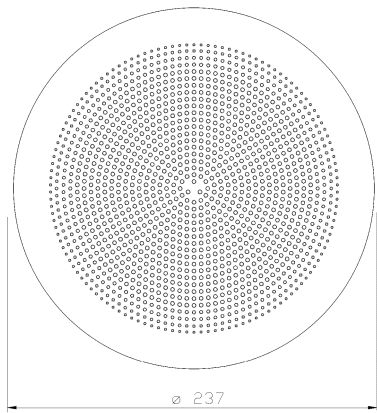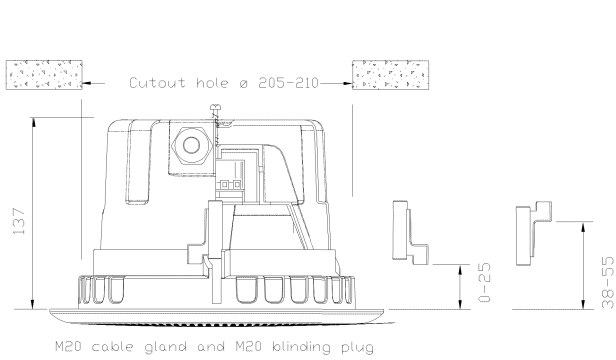

Specifications

GENERAL

Material/Colour	PA-6 V0/ ABS / RAL9010
Mounting	Hooks
Termination	Spring clamp
Weight	1,3 kg
Max./min.amb.temp	90°C / -20°C
Rated power	6W
SPL 1W/1m	93 db
SPL Rated Power	100 db
Effective freq. Range	170 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	155° / 125° (baffle)
Size	(Diam x D): 237 x 137 mm
Environmental Condition	Protected