zenitel

DATASHEET



4000010755

HP-10/8

Horn Loudspeaker, 10W, 8 Ohm, IP66/67

Horn Loudspeaker, 10W, 8 Ohm, IP66/67

- Suitable for outdoor and indoor installation
- IP66/67

Description


The HP-10/8 is a compact 10 W horn speaker delivering a powerful 107 dB SPL at 1W/1m. Built from durable Ronfalin C110 (PC+ABS) and rated IP66/67, it ensures reliable performance in harsh indoor and outdoor environments. With a frequency range of 370–11000 Hz, wide dispersion, and a robust mounting bracket, the HP-10/8 is ideal for public address, safety, and industrial communication systems.

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-10-08 14:07

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

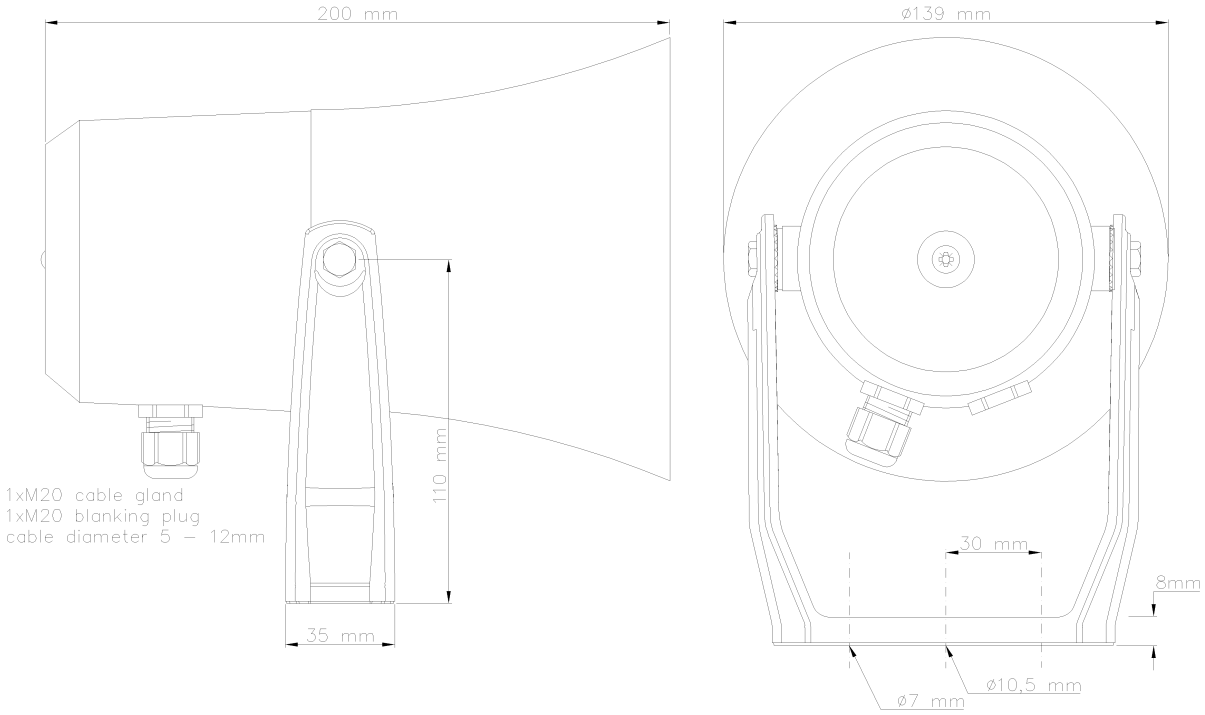

www.zenitel.com info@zenitel.com Last revision date: 2026-10-08 14:07

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Rated power	10 W
SPL 1W / 1 m	107 dB
SPL rated power	116 dB
Effective freq. range	370 – 11000 Hz
Dispersion (-6dB) 1kHz / 4kHz	155° / 52°
Enclosure material / Color	Ronfalin C110 (PC+ABS) / RAL 7035
Mounting material	Plastic bracket
Dimensions	Ø139 x 200D
Termination	Spring clamps
Connection	1x M20 cable gland, 1x M20 blanking plug
M20 cable gland sealing range	5 - 12 mm
Weight	0.96 kg
IP-rating	66/67
Max. / min. ambient temperature	90°C / -50°C
Enviromental Condition	Exposed

www.zenitel.com info@zenitel.com Last revision date: 2026-10-08 14:07

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.