

2640500025

# Splitter, 2-Way, 380-2700 MHz, APS-02-WBS-LP-NF-CC


Power Splitter

- Amphenol Power Splitters covers the bands of 380 - 2700 MHz
- PIM value of -153dBc
- Average max power of 300 W
- IP 65 rating
- N-Female Connector configurations

## Description

The Splitter, 2-Way, 380-2700 MHz, APS-02-WBS-LP-NF-CC covers the bands of 380 - 2700 MHz with a PIM value of -153dBc. It has an average max power of 300 W.  The splitter is mechanically sound and robust which will allows it to be utilized indoors and outdoors with a IP65 rating. It has connector configurations of N-Female.

## Technical Dimensions

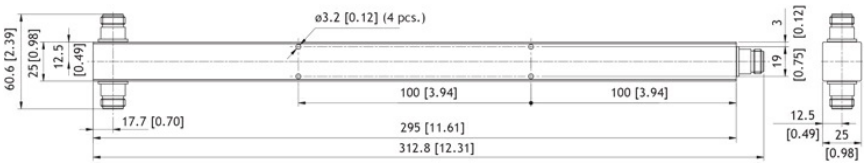




www.zenitel.com info@zenitel.com Last revision date: 2023-11-24 14:48

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

# Specifications

| ELECTRICAL | |
|---|---|
| Frequency | 380 - 2700 MHz |
| Max. Power Input | 300 W |
| Insertion Loss | 0.22 dB |
| Impedance | 50 Ω |
| Peak Input Power | 1.5 kW |
| Passive Intermodulation | < -153 dBc (2 x 43 dBm) |
| Split Loss | 3 dB |
| No. of Channels | 2 |
| Application | Indoor/Outdoor |
| VSWR | < 1.25:1 |

| MECHANICAL | |
|---|---|
| Connection(s) | N(f) |
| Color | Black |
| Weight | 0.48kg |
| RoHS Compliant | Yes |
| Mounting | 3.2 mm dia. (four holes) |

| ENVIRONMENTAL | |
|---|---|
| Operating Temperature Range | -35°C to +70°C |
| Humidity | < 95% |
| Ingress Protection | IP65 |



www.zenitel.com info@zenitel.com Last revision date: 2023-11-24 14:48

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.