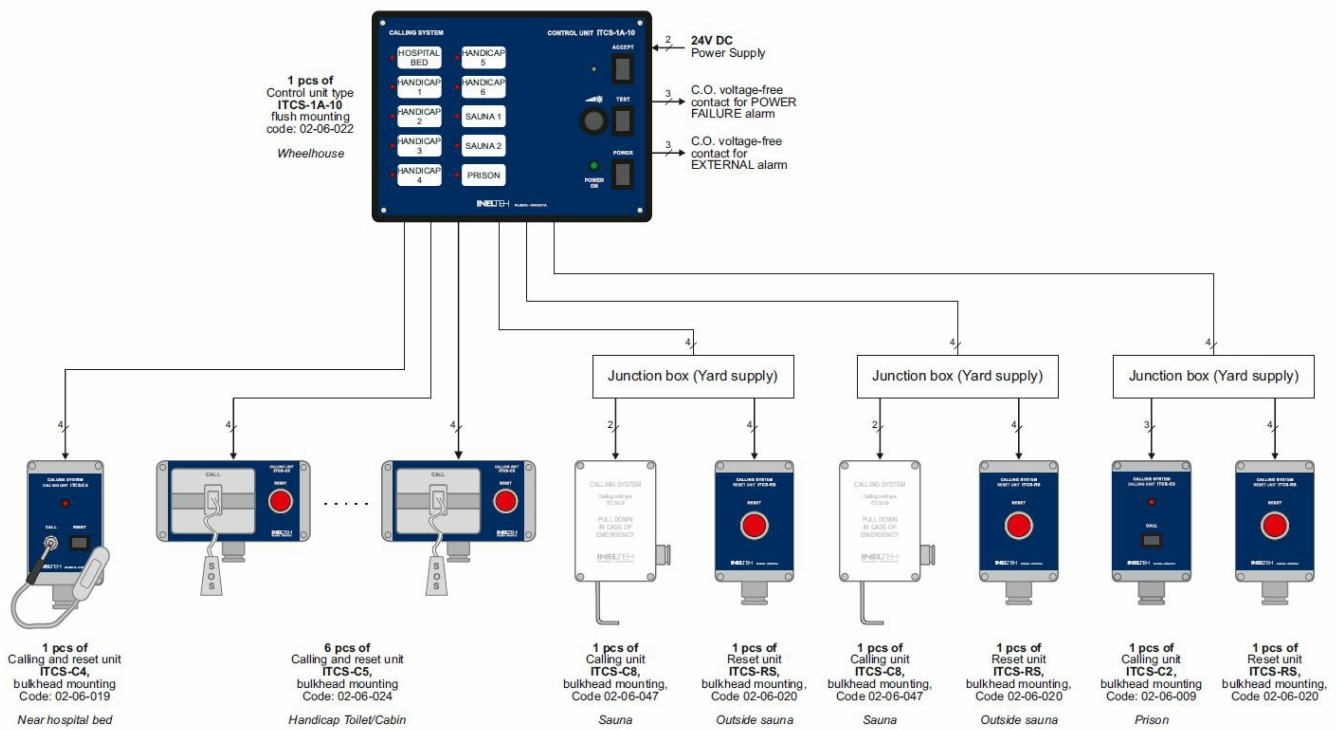4000016474

ITCS-1A-10

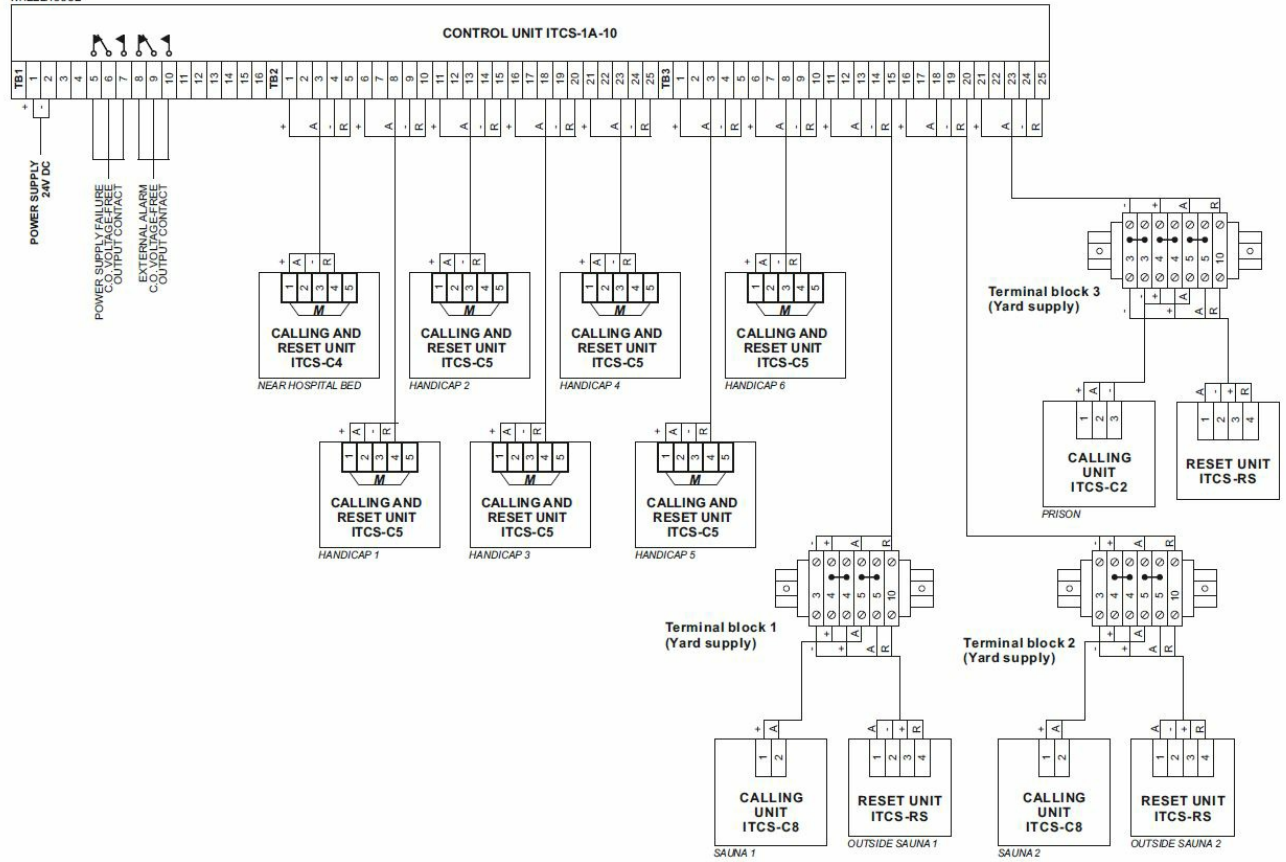## ITCS Control Unit for 10 positions

ITCS-1A-10 is a control unit for indication and acceptance of calls from more calling places in the same system.
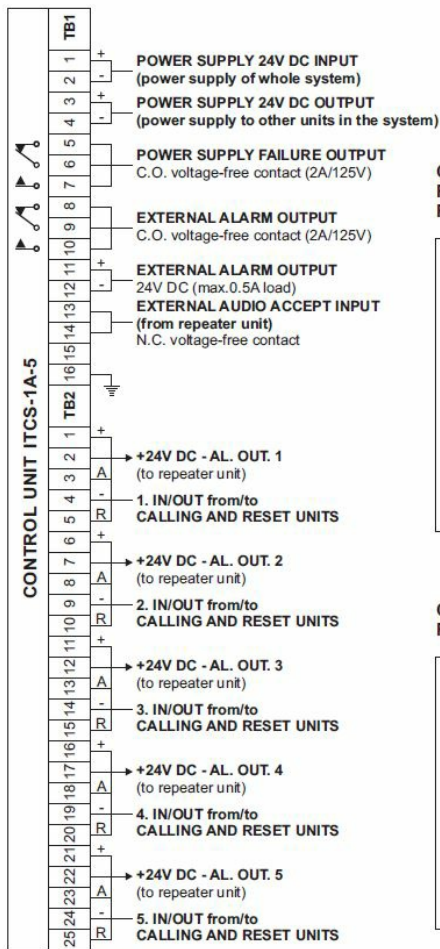
- ✓ Power ON switch incl indicator
- ✓ Alarm leds
- ✓ Buzzer
- ✓ Accept Buttons
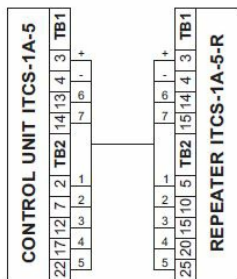- ✓ LED/Buzzer test button

Dimmer

Description

www.zenitel.com   info@zenitel.com

Connection Diagram – CONTROL UNIT ITCS-1A-5 (TB1)

POWER SUPPLY 24V DC INPUT
(power supply of whole system)

POWER SUPPLY 24V DC OUTPUT
(power supply to other units in the system)

POWER SUPPLY FAILURE OUTPUT
C.O. voltage-free contact (2A/125V)

EXTERNAL ALARM OUTPUT
C.O. voltage-free contact (2A/125V)

EXTERNAL ALARM OUTPUT
24V DC (max.0.5A load)

EXTERNAL AUDIO ACCEPT INPUT
(from repeater unit)
N.C. voltage-free contact

CONTROL UNIT ITCS-1A-5 (TB2)

+24V DC - AL. OUT. 1
(to repeater unit)

1. IN/OUT from/to
CALLING AND RESET UNITS

+24V DC - AL. OUT. 2
(to repeater unit)

2. IN/OUT from/to
CALLING AND RESET UNITS

+24V DC - AL. OUT. 3
(to repeater unit)

3. IN/OUT from/to
CALLING AND RESET UNITS

+24V DC - AL. OUT. 4
(to repeater unit)

4. IN/OUT from/to
CALLING AND RESET UNITS

+24V DC - AL. OUT. 5
(to repeater unit)

5. IN/OUT from/to
CALLING AND RESET UNITS

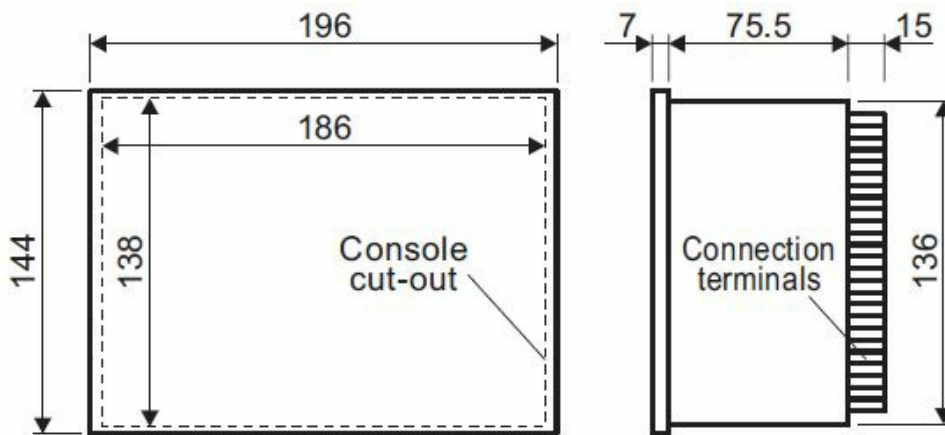**CONNECTION DIAGRAM for REPEATER UNIT ITCS-R2 or REPEATER UNIT ITCS-R2-D:**

CONNECTION DIAGRAM for REPEATER UNIT ITCS-1A-5-R:

***NOTE:**
For control unit ITCS-1A-10 or ITCS-1A-15, additional terminals TB3 and TB4 are used. They are same as terminal block TB2.

Technical Dimensions

for ITCS-1A-10 and ITCS-1A-15

Console cut-out

Connection terminals

196 · 186 · 144 · 138 · 7 · 75.5 · 15 · 136

Specifications

ITCS-1A-10, bulkhead	300x300x120	05-04-002	3xPG13.5 + 1xPG21 + 2xPG29	5,1kg

MECHANICAL

Dimensions (WxHxD)	196x144x96 mm
Weight	5.1 kg

www.zenitel.com   info@zenitel.com