

1150100018

ICX-CAB-LAN SYSTEM RACK

Compact marine intercom cabinet for ICX and FXO integration



- ✓ Up to 24 VoIP Extensions
- ✓ Tailored to meet maritime specifications
- ✓ Type Approved solution for two way communication, talkback, public address and general alarm for all types of vessels
- ✓ Extensive set of features for PABX and emergency communication
- ✓ Supports Zenitel's integrated PA and GA solution
- ✓ Wide range of audio terminals and signal units
- ✓ Prepared for integration to i.e. two-way radio or DECT
- ✓ Installation friendly with easy access to all terminals
- ✓ Remote management and supervision using IP and Web technologies
- ✓ Redundant power input with switchover



Onboard communication

Description

The ICX-CAB-LAN compact cabinet is specially designed for use onboard ships. The system is based on the ICX-AlphaCom communication platform with an extensive feature set. The ICX-AlphaCom intelligent communication system supports the Zenitel integrated PA and GA solution.

The ICX-CAB-LAN is prepared for one 24 port port Cisco C1000 network switch, which can provide 24 VoIP extensions.

Compact marine intercom cabinet for ICX and FXO integration

The ICX-AlphaCom solution supports a wide range of IP and wireless communication terminals made for the offshore environment. The intercom terminals are type approved as integrated PA, GA, telephone and talkback units. IP DECT base stations connect directly to the exchange over IP providing a very cost efficient solution to deploy a wireless network onboard. The ICX-CAB-LAN can be customized with a set of option packages. These include:


- ✓ FXO gateway (4 channels)
- ✓ 4G telephone gateway
- ✓ IP DECT system
- ✓ Public address zone switching
- ✓ Customized directory programming

The system is service friendly. The exchange is mounted in a steel rack, providing easy access to all terminal blocks in the back side of the rack.

The system is type approved by DNV as an integrated communication system for two way communication, talk-back, Public Address (PA) and General Alarm (GA).

Technical Dimensions

page 1/3

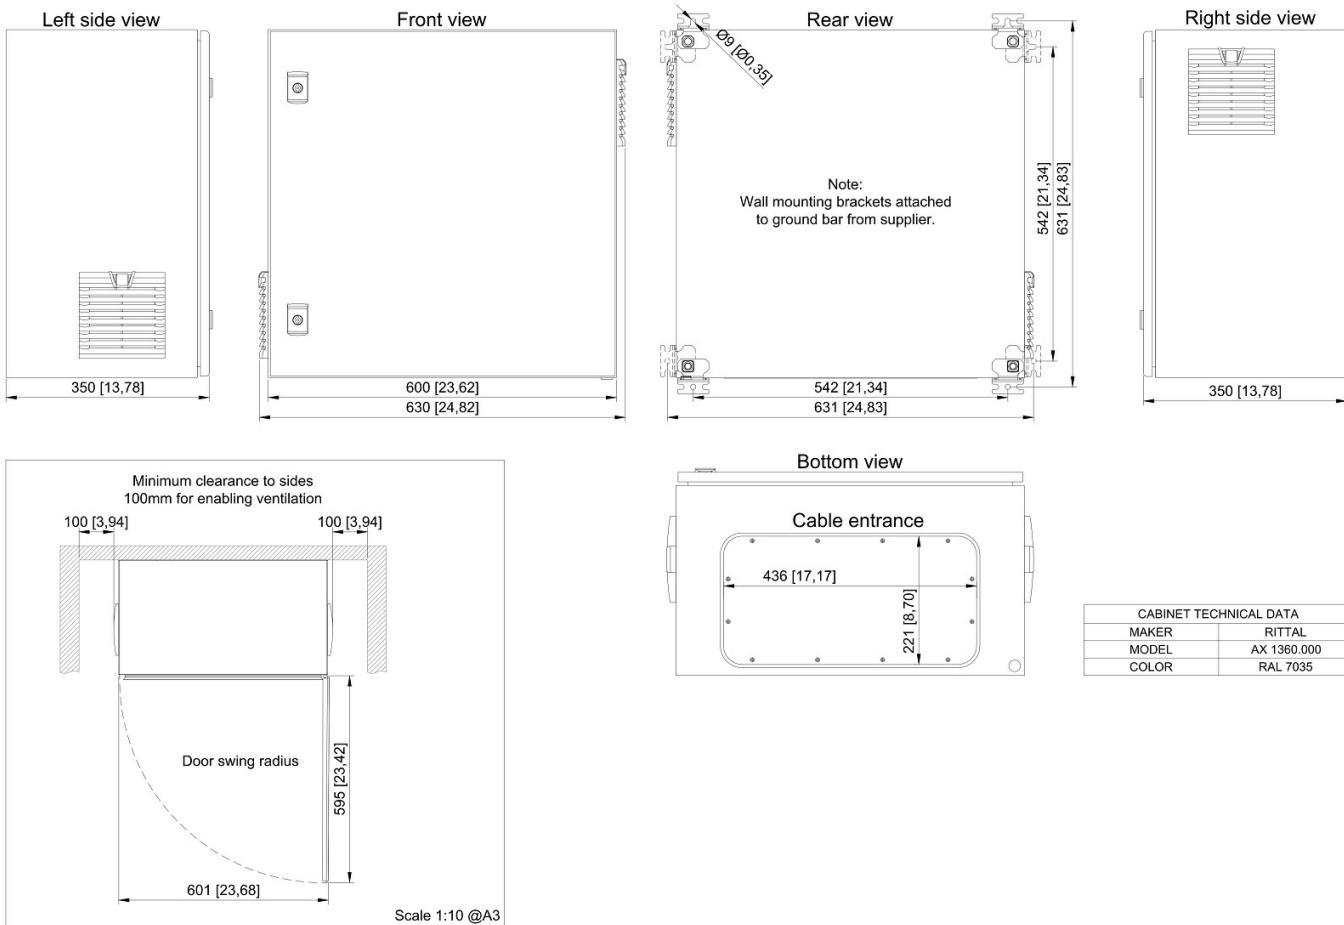

Specifications

ORDER NUMBER	DESCRIPTION
1150100018	ICX-CAB-LAN Compact cabinet for ICX-AlphaCom, IP, AC/AC
2220012401	Cisco C1000 24port 1G PoE+ w/ 4x1G SFP / IEC60945
1016216	IP311 4 FXO Gateway
1008095201	IP-LCM Line Connection Module IP - IP-LCM-A
2220012258	BC-11-006-24 Connector RJ45 Cat6A STP v2 - 24 pcs
2990050034	INV-24-230 Inverter 750VA 24 Vdc to 230 VAC approx.645W in PLM cabinet

GENERAL

Dimension (WXHxD)	600 x 600 x 350 mm
Weight	40 kg
Mounting	Wall mounted
Temperature range	-15 - 55°C, recommended 18 - 25°C
Power	230V AC mains with auto switchover to 230V AC UPS or 230V AC emergency
IP class	IP 22
Number of extensions	Up to 24 VoIP extensions
External interface	Optional FXO gateway Optional 4G gateway

Accessories



IP311 4 FXO Gateway



IP-LCM-A



INV-24-230

4 Port FXO VoIP Gateway

IP Line Expansion Module with Inputs/Outputs

Inverter Cabinet 24VDC to 230VAC