

2340110041

SPA-W1-V2-MED

Weatherproof PA Panel



MED Certification



IP66


Description

- ✓ Weatherproof PA panel for single system
- ✓ Built-in pre-amplifier with preset signal level and tone controls
- ✓ Requires microphone with PTT
- ✓ Plug for WP handheld microphone P-66 or P-66/10
- ✓ Wall mounting outdoor / Indoor
- ✓ Local mute contact for external loudspeaker (from hardware version 4.0)

This waterproof panel gives All Call Message in a SPA-V2 public address and general alarm single system. Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback.

page 1/3

Technical Dimensions

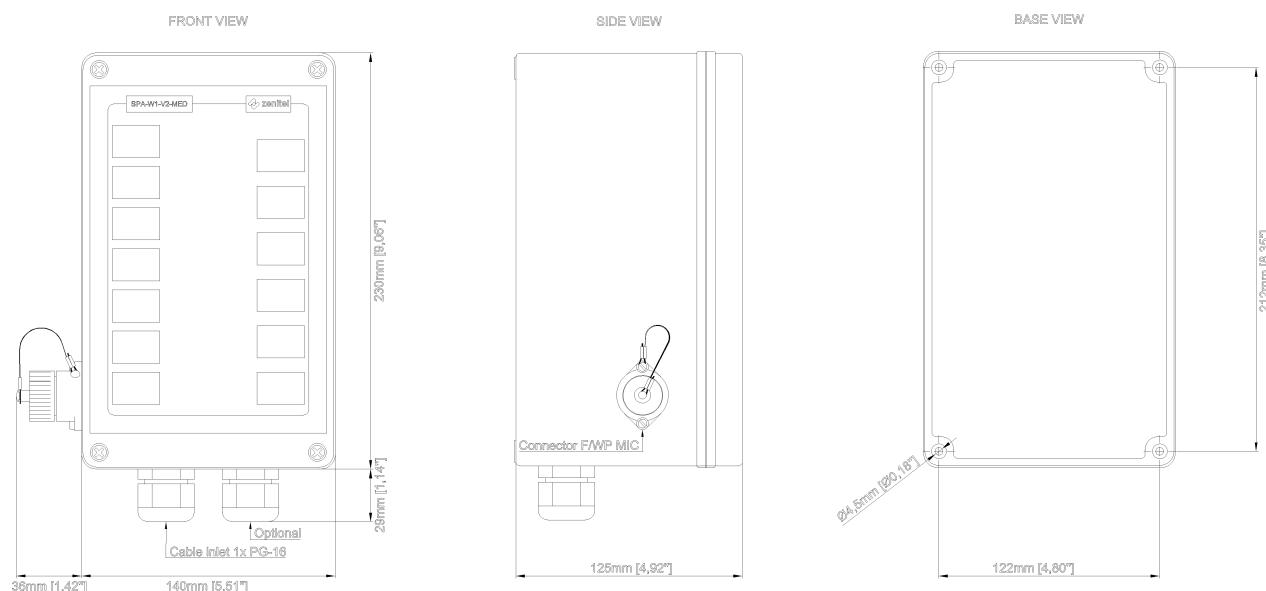

Specifications

GENERAL

Size (WxHxD)	140 x 230 x 125
Weight	0.5 kg
Material	ABS plastic
Mounting	Wall
Output signal	0.775Vrms / 0dB
Sensitivity microphone	200 ohm / 0.5mV
Connections	Plugable screw terminals for 2.5 mm 2 cable
Cable glands	2 x PG-16
Cable size	6 x 2 x 0.75mm ²
Protection	IP-66
Operating temperature	-25°C TO +55°C
EN60945 environmental category	Exposed
Compass safe distance	0.75 m

Accessories



P-66

Handheld Microphone
Waterproof

P-66/10

Handheld Microphone with
10-Meter Cable Waterproof