


2340110044

SPA-W1AR-D-MED

Dual Weatherproof PA- and Alarm Panel

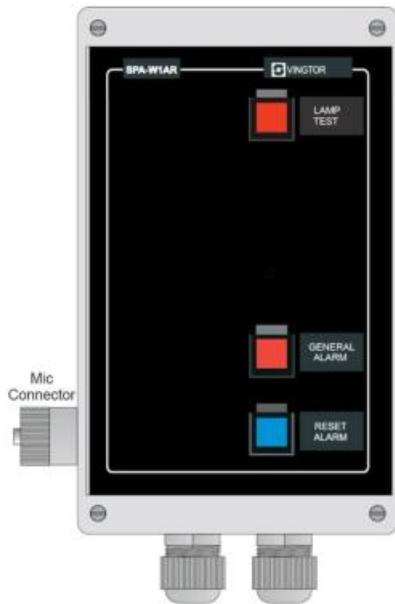

MED Certification



IP66

Description

- ✓ Weatherproof PA and Alarm Panel for dual system
- ✓ General alarm
- ✓ Built-in pre-amplifier with preset signal level and tone controls
- ✓ Buttons with hinged transparent protecting cover
- ✓ Requires microphone with PTT
- ✓ Replaceable text label to each button
- ✓ Plug for WP handheld microphone P-66 or P-66/10
- ✓ Wall mounting outdoor / indoor


page 1/3

- Local mute contact for external loudspeaker (from hardware version 4.0)

This weatherproof panel is a combined panel for General Alarm and All Call Message. For use in SPA-V2 Public Address and General Alarm Dual System.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0 This function must be in combination with relay box.

Technical Dimensions

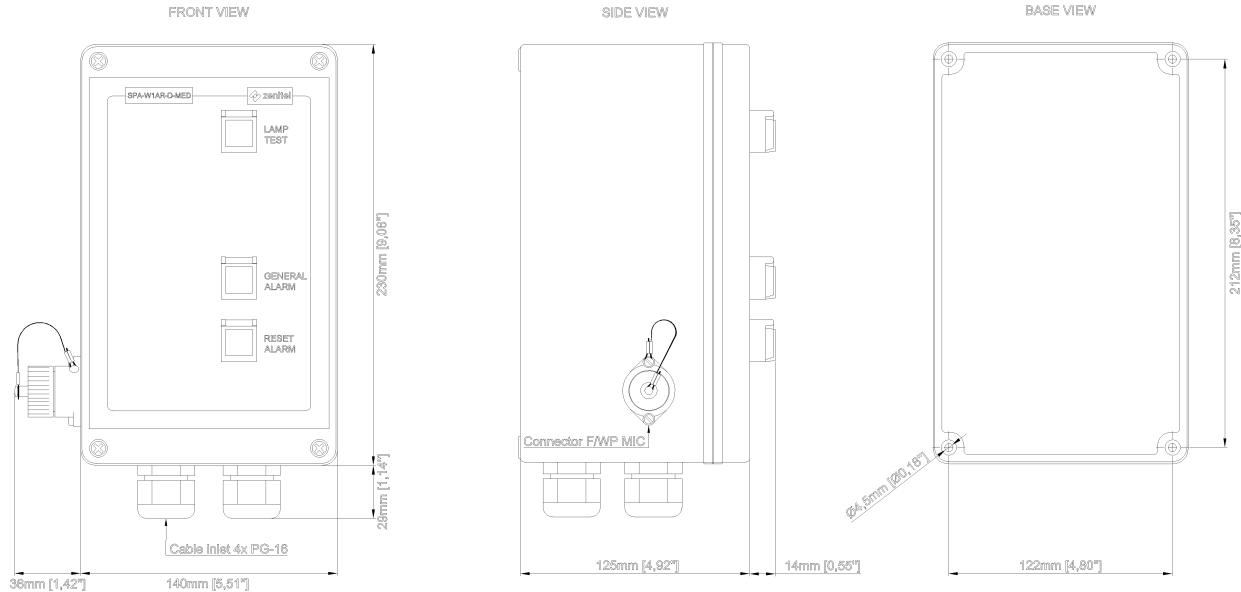

Specifications

GENERAL

Size (WxHxD)	140 x 230 x 125 mm
Weight	0.5 kg
Material	ABS plastic
Mounting	Wall
Output signal	0.775Vrms / 0dB
Sensitivity microphone	200 ohm / 0.5 mV
Connections	Plugable screw terminals for 2.5 mm ² cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75 mm ²
Protection	IP-66
Operating temperature range	-25° to 55° C
EN60945 environmental category	Exposed
Compass safe distance	0.75 m

Accessories



P-66

Handheld Microphone
Waterproof



P-66/10

Handheld Microphone with
10-Meter Cable Waterproof

page 3/3