

2340110046

SPA-W6A4-D-MED

Dual Weatherproof PA and Alarm Panel 6 Zones



MED Certification



IP66

Description

- Weatherprooof PA and Alarm panel for dual system
- Duplicated activating of abandon, general or manual alarms
- Contact for WP handheld microphone P-66 or P-66/10
- Built-in pre-amplifier with preset signal level and tone controls
- 6 zone selection buttons
- Alarm buttons with hinged transparent protecting cover
- Requires microphone with push to talk (PTT)
- Plug for WP handheld microphone P-66 or P-66/10


page 1/3

- Replaceable text label to each button
- Wall mounting, outdoor or indoor
- Local mute contact for external loudspeaker (from hardware version 4.0)

This weatherproof panel is a combined alarm and PA panel for use in a SPA-V2 public address and general alarm dual system. The PA part can operate six public address zones. Can be used as a PA-panel or Alarm panel or in combination. Sixteen different configuration of alarm sounds available.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0 This function must be in combination with relay box.

Technical Dimensions

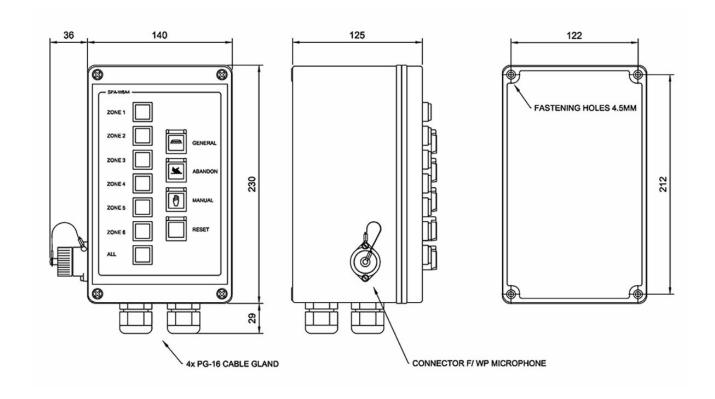

Specifications

GENERAL

Size (WxHxD)	140 x 230 x 125
Weight	0. 7 kg
Material	ABS plastic
Mounting	Wall
Output signal	0.775Vrms / 0dB
Sensivity microphone	200 ohm / 0,5mV
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	4x PG-16
Cable size	6 x 2 x 0.75mm2
Protection	IP-66
Operating temperature	-25°C TO +55°C
EN60945 environmental category	Exposed
Compass safe distance	0.75 m

Accessories





P-66

Handheld Microphone Waterproof P-66/10

Handheld Microphone with 10-Meter Cable Waterproof

page 3/3