zenitel

DATASHEET

2131000155

BPF-660T-MED

Ceiling speaker, 100V, IP54, 6W



- 70V / 100V line
- Tapping: 0,5W - 1,5W - 3W - 6W
- MED approved

MED Certification IP54

Description

Our new improved mounting system makes this the most flexible 6″ ceiling speaker DNH A/S has made. The hooks are changeable to set upside down, allowing up to 55 mm on the ceiling thickness. The easy mounted dust box has a M20 gland and a M20 blanking plug on the side as standard.

Installation, Operation and Maintenance Procedures

- Install the ring into the cutout hole turning the crews connected to the three hooks, screw clockwise until the ring is fixed to the ceiling.
- Open box by one screw, lead cable through cable gland, connect to terminal (70V or 100V) and select required tapping on transformer.


www.zenitel.com info@zenitel.com Last revision date: 2025-05-14 13:39

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

- Screw box back into place with one screw.
- Turn the grille gently clockwise within the ring until it stops.
- Hooks can be mounted both ways, see drawing at top of the page.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with two years warranty against defective workmanship.

Technical Dimensions

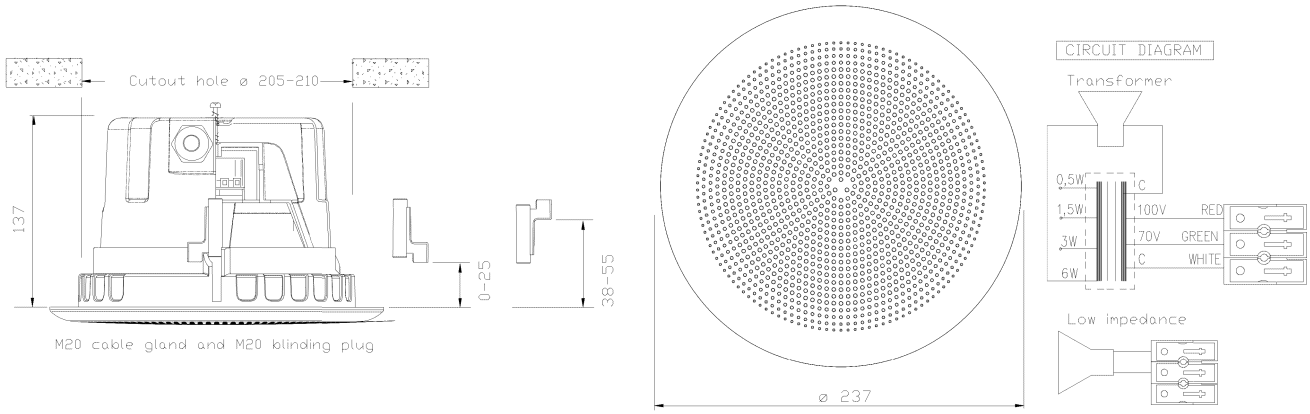

www.zenitel.com info@zenitel.com Last revision date: 2025-05-14 13:39

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Material/Colour	PA-6 V0/ ABS / RAL9010
Mounting	Hooks
Termination	Spring clamp
Weight	1,3 kg
Max./min.amb.temp	90°C / -20°C
Rated power	6W
SPL 1W/1m	93 db
SPL Rated Power	100 db
Effective freq. Range	170 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	155° / 125° (baffle)
Size	(Diam x D): 237 x 137 mm
IP Rating	IP54
Environmental Condition	Protected

www.zenitel.com info@zenitel.com Last revision date: 2025-05-14 13:39

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.