

2131000166

DSP-15 EExmNT 25W - 2x blind plugs - MED

Ex horn speaker, Ex db eb mb IIB+H2 T4 Gb, 25W, 2x blind plugs

- 25W
- 2x M20 blind plugs
- Tappings: 1.5W - 2.5W - 5W - 6.5W - 15W - 25W
- Ex db eb mb IIB+H2 T4 Gb
- Ex tb IIIC T105°C Db
- MED Approved

MED Certification IP66 IP67 IEC Ex Intercom Atex

Description

- With 100V line transformer
- With internal thermal fuse
- Rated/max. power: 25W
- Tappings: 1.5W - 2.5W - 5W - 6.5W - 15W - 25W
- Material: Antistatic PA / Black
- Bracket and all outside nuts and screws in stainless steel

Installation, Operation and Maintenance Procedures


- Remove the lid by four screws, lead the cable through the cable gland, and connect to the terminal with the required tapping.
- Every time the back lid is removed, check that the gasket is fitted correctly to the lid before you refit the back lid. Do not use any lubricants on the gasket.
- Screw the lid back into place with four screws with a torque of 0,95-1,2 Nm to ensure the IP rating.
- To change the position of the loudspeaker, please adjust the standard U-bracket (by loosening/tightening the screws) as required.
- Use only IECEx/ATEX certified “Ex eb” cable glands and blanking plugs reflecting the same IP rating and temperature range as the loudspeaker.
- Standard model delivered with two M20 Ex-approved plastic blanking plugs.
- According to customer requirements, DSP-15EExmN(T) can be supplied with three different bracket systems.
- For optimum performance, always use the correct voltage/power and operate within the frequency limits as stated.
- Do not open the loudspeaker when energized.


www.zenitel.com info@zenitel.com Last revision date: 2026-03-11 08:46


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.


ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Technical Dimensions

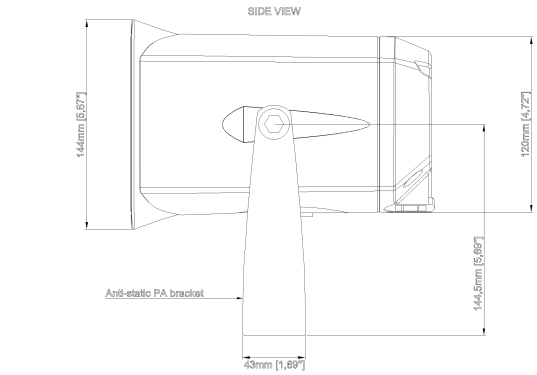



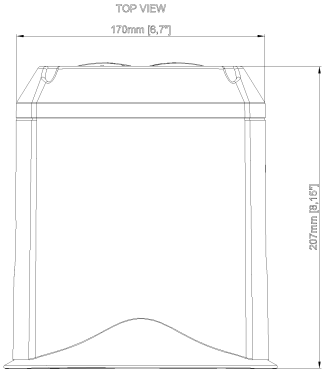

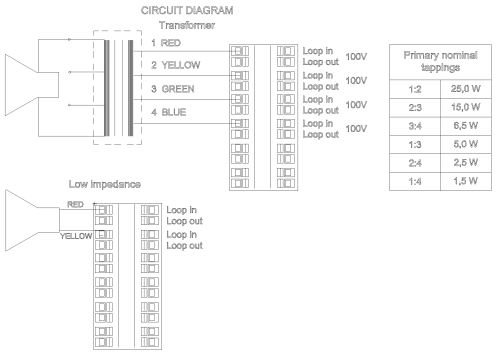

Primary nominal tappings	
1:2	25,0 W
2:3	15,0 W
3:4	6,5 W
1:3	5,0 W
2:4	2,5 W
1:4	1,5 W

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Material / Color	Anti-static PA / Black
Mounting	Bracket
Termination	e-chamber, push terminals
Weight w/ transformer	2,2 kg
IP-rating	IP-66/67
Max / min amb temp.	60°C / -50°C
Rated / max. power	25 W / 30 W
SPL 1W/1m	106 dB
SPL rated power	118 dB
Effective freq range	380-8000 Hz
Dispersion (-6dB) 1kHz / 4kHz	120° / 37°
Directivity factor, Q (1kHz/4kHz)	4,5 / 9,6
Fuse	Thermal fuse- 84°C, 2x Short-circuit protection fuses
Environmental Condition	Exposed

Accessories



DSP-EX-CG

Ex horn speaker cable gland, M20, 11-14mm

Item Number: 2131000167

www.zenitel.com info@zenitel.com Last revision date: 2026-03-11 08:46

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.