

4000019752

## ITCS-C5

Unit for calling and call reset for bathroom

Unit for Call and Call Reset for bathroom



---


---

## Description

- ✓ Mostly used in bathrooms/toilets
- ✓ Call is done by pulling call cord in direction marked with arrow
- ✓ Red bulb in push button lights when call is done, push the button and the call is reset
- ✓ Bulkhead mounting

## Technical Dimensions

# OUTLINES:

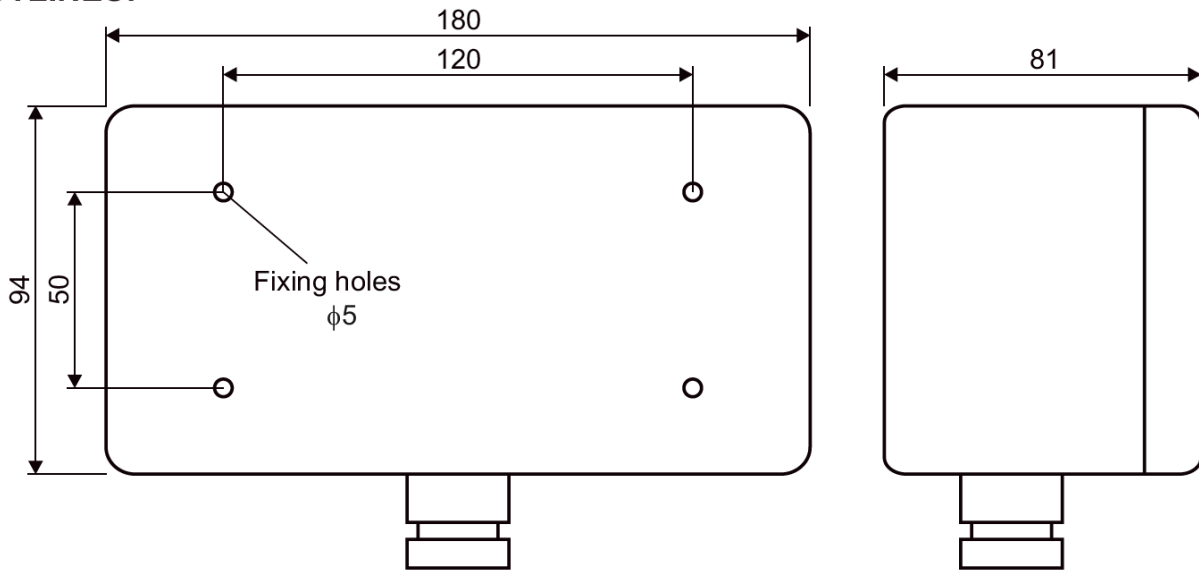


# Specifications

## MECHANICAL

Dimensions (WxHxD)	180x94x81 mm
Weight	0.5 kg
Cable inlet (gland)	1 x PG 13.5
Protection	IP 44

## CONNECTION:

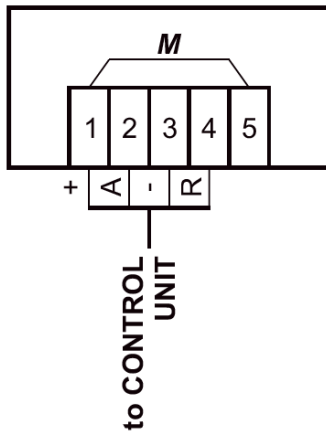


## CURRENT CONSUMPTION:

0.013A / 24V DC

## NOTE:

If more calling units type ITCS-C4, C5 or C6 is used for same calling place/line, terminals 1,2,3 are connected in parallel and terminals 4,5 in series. Put link *M* on last unit in chain.

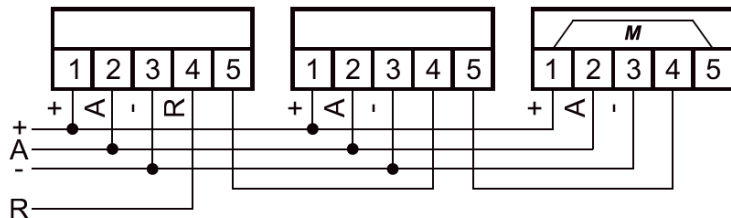

## Used With



### ITCS-1A-24VDC

Single Call Control Unit, 24 VDC



### ITCS-2A-24VDC

Double Call Control Unit, 24 VDC



### ITCS-2A-230VAC

Double Call Control Unit, 230 VAC



### ITCS-2A-24VDC

Double Call Control Unit, 24 VDC



## ITCS-1A-10

ITCS Control Unit for 10 positions