4000019752
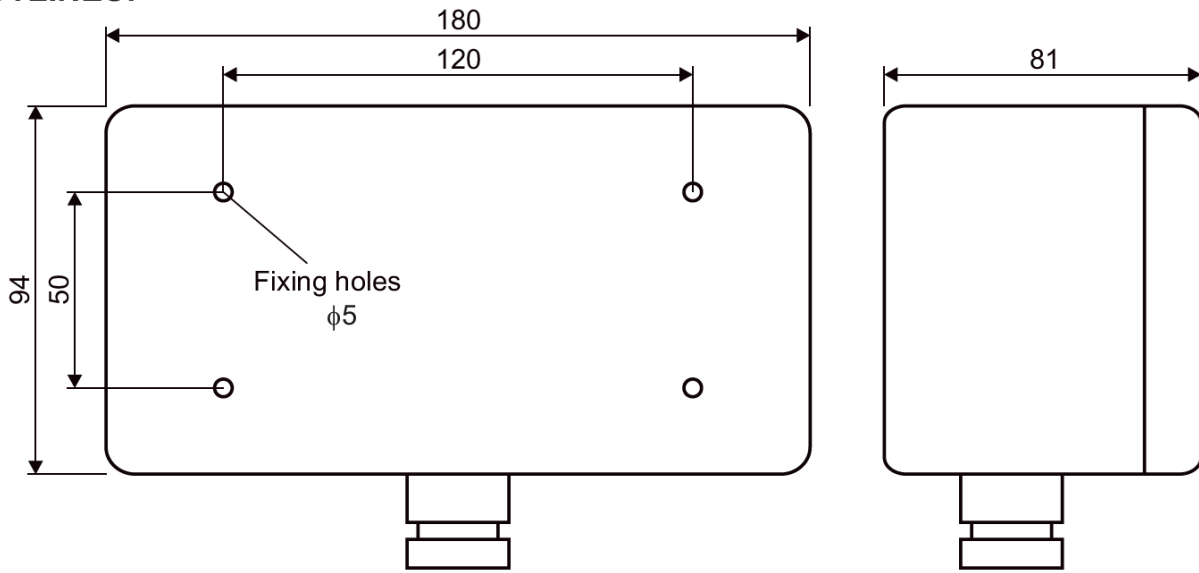
ITCS-C5

Unit for calling and call reset for bathroom

Unit for Call and Call Reset for bathroom

Description

- ✓ Mostly used in bathrooms/toilets
- ✓ Call is done by pulling line - rope in direction marked with arrow
- ✓ Red bulb in push button lights when call is done, unitl call is reset
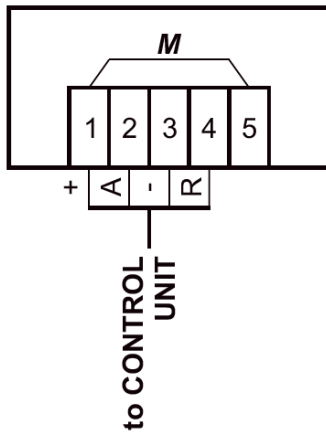- ✓ Bulkhead mounting

Technical Dimensions

OUTLINES:

180

120

94

50

Fixing holes
ϕ5

81

www.zenitel.com   info@zenitel.com

Specifications

MECHANICAL

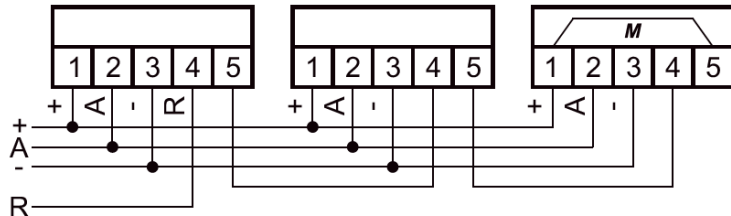|	
Dimensions (WxHxD)	180x94x81 mm
Weight	0.5 kg
Cable inlet (gland)	1 x PG 13.5
Protection	IP 44

CONNECTION:

CURRENT CONSUMPTION:
0.013A / 24V DC

NOTE:
If more calling units type ITCS-C4, C5 or C6 is used for same calling place/line, terminals 1,2,3 are connected in parallel and terminals 4,5 in series. Put link **M** on last unit in chain.

Used With

ITCS-1A-24VDC

Single Call Control Unit, 24 VDC

ITCS-2A-24VDC

Double Call Control Unit, 24 VDC

ITCS-2A-230VAC

Double Call Control Unit, 230 VAC

ITCS-2A-24VDC

Double Call Control Unit, 24 VDC

www.zenitel.com   info@zenitel.com

ITCS-1A-10

ITCS Control Unit for 10
positions