



2810011078

## CAB-AVT-W-115-230

Active ventilation for CABxx with glass door, 115-230VAC

- ✓ A fan in the cabinet top (Top fan unit 550x340x42mm 280m<sup>3</sup>/h)
- ✓ Enclosure internal thermostat
- ✓ Thermostat Mounting plate
- ✓ Air inlet
- ✓ IP20

---


---

## Description


CAB-AVT-W-115-230 is active ventilation for CABxx with a glazed door. It operates on voltages between 100 V - 240 V, 1~, 50 Hz/60 Hz.

The top ventilation unit is equipped with 2 fan units and ensures 280 m<sup>3</sup>/h of air throughput.

## Technical Dimensions



Product description	
Rated operating voltage	100 V - 240 V, 1~, 50 Hz/60 Hz
Air throughput (unimpeded air flow)	280 m <sup>3</sup> /h
IP protection	IP 20
Weight	4,57kg

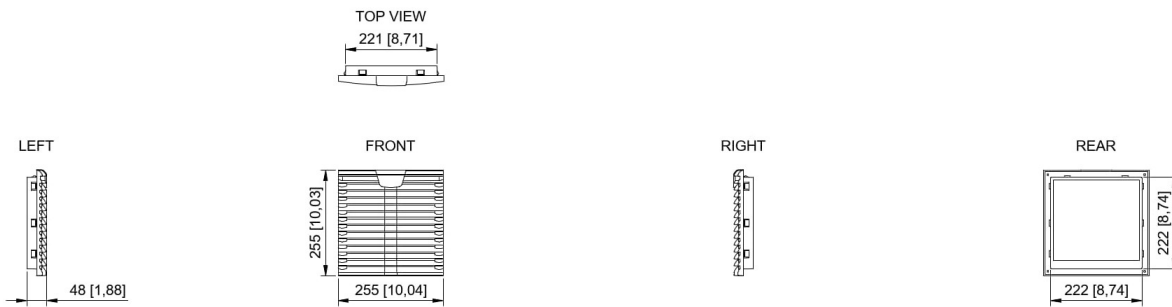

# Specifications

## ELECTRICAL DATA

Rated operating voltage	100 V - 240 V, 1~, 50 Hz/60 Hz
Rated current max.	At 50 Hz: 0.7 A At 60 Hz: 0.69 A
Air throughput, unimpeded air flow	280 m <sup>3</sup> /h

## DIMENSIONS & WEIGHT

Roof air outlet dimensions (W x H x D)	550x42x340mm
Air inlet fan dimensions (W x H x D)	255x255x25mm

## Used With



### CAB15F-V2

Floor-mounted 15HU cabinet - 600x800x600mm (WxHxD) fixed frame



### CAB24FW-V2

Floor-mounted 24HU cabinet - 800x1200x600mm (WxHxD) fixed frame



### CAB24FWD-V2

Floor-mounted 24HU cabinet - 800x1200x800mm (WxHxD) fixed frame



### CAB42F-V2

Floor-mounted 42HU cabinet - 600x2000x600mm (WxHxD) fixed frame



**CAB42FW-V2**

Floor-mounted 42HU cabinet -  
800x2000x600mm (WxHxD)  
fixed frame



**CAB42FWD-V2**

Floor-mounted 42HU cabinet -  
800x2000x800mm (WxHxD)  
fixed frame



**CAB24F-V2**

Floor-mounted 24HU cabinet -  
600x1200x600mm (WxHxD)  
fixed frame



**CAB24SW-V2**

Floor-mounted 24HU cabinet -  
800x1200x600mm (WxHxD)  
swing frame



**CAB42FD-V2**

Floor-mounted 42HU cabinet -  
600x2000x800mm (WxHxD)  
fixed frame



### CAB42FWDD

Floor-mounted 42HU cabinet -  
800x2000x1000 (WxHxD) fixed  
frame