

1000340

## CAB15-EL

Wall cabinet 19" 15HU 600x573x746mm swing frame



- ✓ Includes assembly and ground wiring
- ✓ Includes fan and thermostat
- ✓ Includes DIN rail and cable ducts
- ✓ Variable depth adjustment for flexible installation
- ✓ Maximum equipment depth 340mm
- ✓ Double-section design with hinged access
- ✓ Tempered safety glass door (3mm)
- ✓ Built-in security with comfort handle and lock system

## Description


Our Wall-Mounted Cabinet CAB15-EL is designed for professional indoor applications, offering convenience and versatility. With its hinged section design and robust construction, this cabinet provides an efficient and secure solution for your installation needs.

Equipped with two 19" mounting profiles and variable depth adjustment, this cabinet provides excellent flexibility to position your system components as desired, accommodating various equipment sizes and configurations. The 15U height offers space for your networking equipment while maintaining a compact wall-mounted footprint.

Efficient cable management is facilitated with the bottom featuring a brush strip for clean cable entry. The cabinet includes outlet filters with one fan and thermostat and an integrated earthing system for proper equipment grounding. The tinted safety glass door provides both protection and easy viewing of equipment status.

Installing and maintaining the cabinet is streamlined, as the hinged design allows easy access to the rear of the equipment. The robust construction, with IP54 protection rating, ensures your equipment remains secure and protected from environmental factors.

## Technical Dimensions

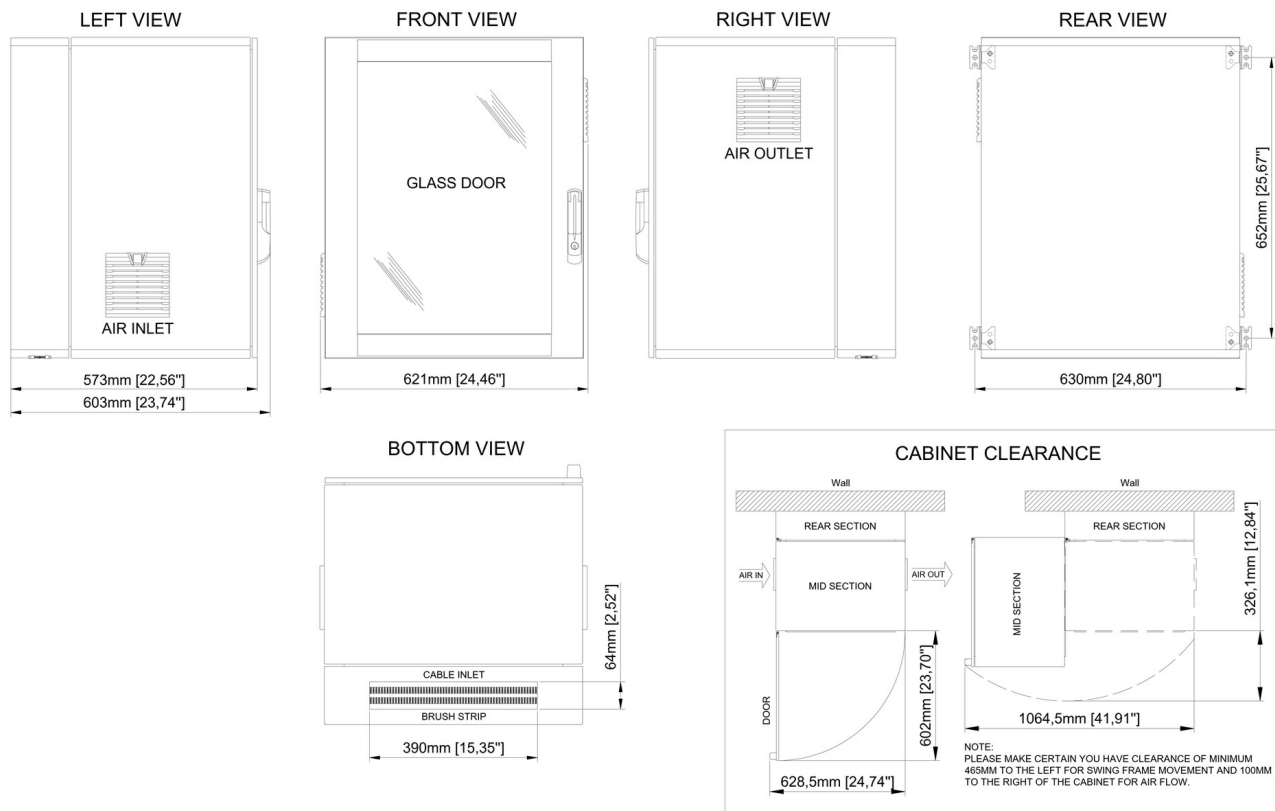

# Specifications

## GENERAL

Model	Rittal DK 7715.735
Dimensions (WxHxD)	600x746x573 mm
Color	RAL 7035
Material	Steel
Ingress grade	IP54
Mounting	Wall mounted
Cable inlet	Bottom
Maximum load capacity	100kg
Installation depth	520 mm
Units	15U
Door type	Tempered safety glass, 3 mm
Lock type	Security lock with comfort handle