

1000364

UPS-XPC-2800-120R

Rack mount online UPS, 2800W/30 min, 120V, incl. rails



- ✓ 120VAC nominal output voltage
- ✓ True double conversion online UPS
- ✓ Input voltage range: 55-150VAC
- ✓ Hot-swappable battery design
- ✓ 6HU
- ✓ Minimum cabinet depth: 800mm
- ✓ Including mounting rails

Description

The UPS-XPC-2800-120R is a robust, rack-mountable uninterruptible power supply system designed for mission-critical communication applications that require reliable power protection and extended runtime capabilities. At its core, it features a true double conversion online UPS rated at 3000VA/2880W, delivering clean, stable 120VAC power with pure sine wave output and exceptional efficiency ratings up to 98% in ECO mode.

The system incorporates advanced features like programmable outlets, comprehensive LCD monitoring, and multiple communication interfaces including RS-232, USB, and SNMP connectivity, making it ideal for protecting critical communication infrastructure.

What sets this UPS apart is its enhanced backup capabilities, achieved through the integration of the P91-BP72 battery pack, providing a substantial 30-minute runtime at rated load - essential for maintaining uninterrupted communication during power outages. The hot-swappable battery design ensures easy maintenance without powering down connected communication equipment, while the advanced battery management system with adjustable charging current optimizes battery life and performance.


This makes it an ideal power protection solution for our critical communication systems, ensuring continuous operation of intercoms, public address systems, and other emergency equipment.

Item UPS-XPC-1300-120R consists of the following items:

- ✓ 1x P91-3000
- ✓ 2x P91-BP72

page 1/3

Technical Dimensions

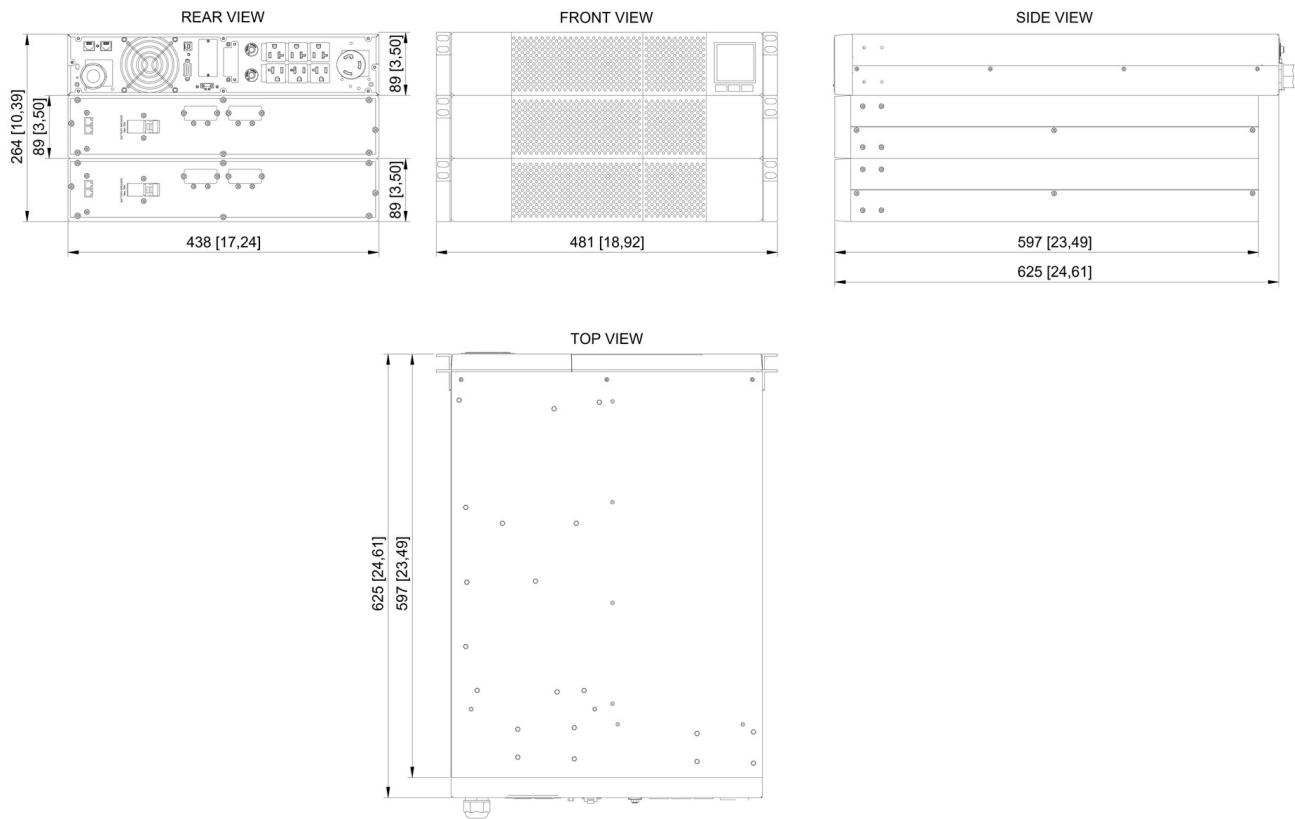

Specifications

GENERAL

Power rating	3000VA/2880W
Input Voltage Nominal/Frequency	55–150VAC* / 50/60Hz auto-sensing
Output Voltage	120VAC nominal (100,110/115/127 selectable)
Efficiency	Up to 98% ECO mode or 94% online mode
UPS, Dimensions (W x D x H)	43.7 x 60.5 x 8.9cm / 17.2 x 23.8 x 3.5 in
UPS, Weight	27.5kg / 60.6 lbs
Battery Type (included)	Up to 30 minutes
Battery, Dimensions (W x D x H)	2x 43.7 x 59.9 x 8.9 cm. / 17.2 x 23.6 x 3.5 in
Harmonic distortion	2% @ 100% linear load; 5% @ 100% non-linear load

Accessories



UPS-XPC-CARD

Dry Contact Interface Card

page 3/3