zenitel

DATASHEET



1008116020NL

TMIS-2NL | Mini Audio Intercom

IP and SIP Mini Intercom - No Logo

- Robust - 11 gauge stainless steel front plate with one vandal resistant call button, and LED indicators
- Advanced Audio Technology - High sound pressure levels, automatic volume gain control, and active noise and echo cancellation for superior clarity.
- ONVIF Conformant - Seamless video and device integration
- Flexible Installation - Options for wall or flush mounting
- Seamless Integration - Fully compatible with Zenitel Connect Pro, ICX-AlphaCom, IC-EDGE, and SIP-based systems.

Americas only

Zenitel Connect | Emergency points | SIP | ONVIF Conformant | IC-Edge | ICX-AlphaCom

HD Voice

Description

The TMIS-2NL is a robust, compact audio intercom module designed for indoor use. Ideal as a communication, information, or emergency point, it connects directly to the IP network for simple deployment anywhere and at any distance. With crystal-clear HD Voice, natural two-way communication, and advanced noise suppression with echo cancellation, it ensures outstanding speech intelligibility even in challenging environments. Built for long-term reliability, the unit is dust- and water-protected and fully compatible with Zenitel's ecosystem, including Zenitel Connect Pro, ICX-AlphaCom, IC-EDGE, and SIP-based systems.


See also: additional documentation on wiki.zenitel.com

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2025-10-31 13:39

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

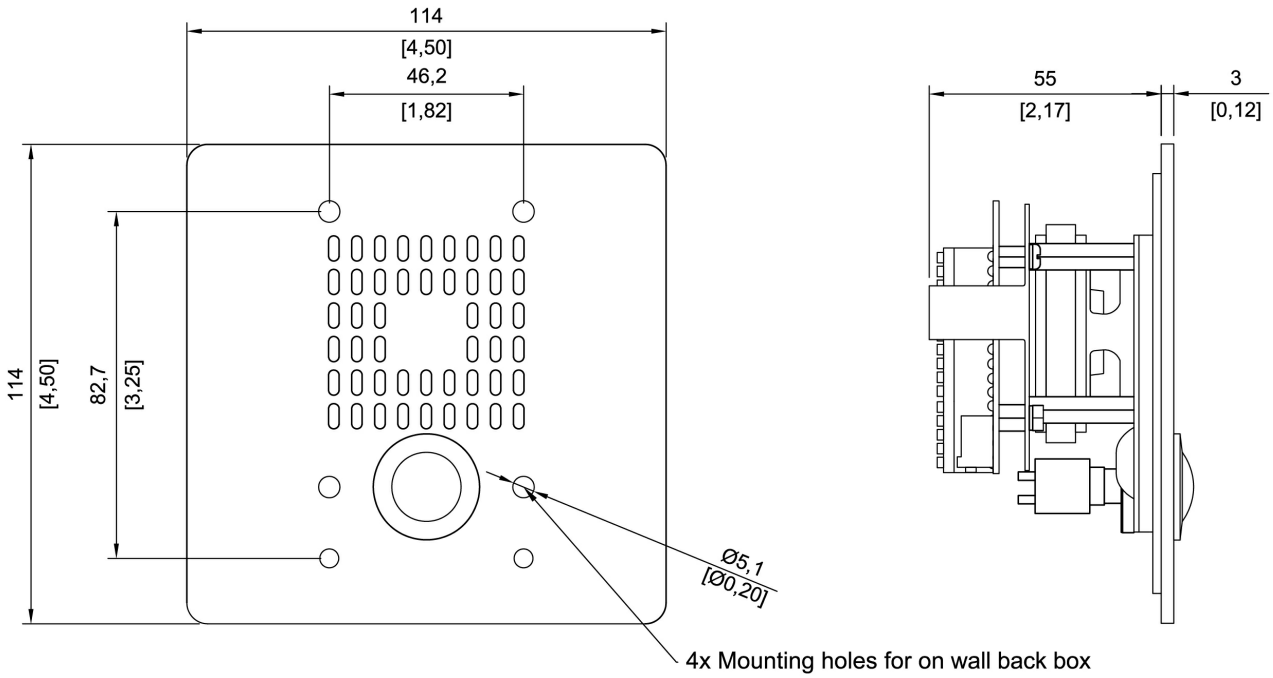

www.zenitel.com info@zenitel.com Last revision date: 2025-10-31 13:39

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

SPECIFICATIONS:

Faceplate:	11 guage, #304 Stainless Steel
Dimensions in inches:	4.5 H x 4.5 W x 2.3 D
Protection Class:	IP 64 with proper installation
Speaker:	2 x 2 square, 45 ohm, 5 watt, waterproof
Power:	Power over Ethernet, IEEE
	Local Power 24VDC
Indicator:	LED behind translucent red epoxy bonded Lexan lens
Mounting:	Surface or Flush, depth of 2.5” required
Connectors:	1 RJ45 (Ethernet) 10/100 Mbps
	6 I/O’s
	1 Relay Contact
IP Protocols:	IP v4, TCP, HTTPS, TFTP, RTP, RTCP, DHCP, SNMP, DiffServ, TOS, ONVIF, CCoIP
LAN Protocols:	Power over Ethernet (IEEE 802.3 a-f), VLAN (IEEE 802.1pq), Network Access Control (IEEE 802.1x)
Audio Technology	Wideband 200 Hz – 7 kHz (G.722)
	Telephony 3.4 kHz (G.711)
	Acoustic Echo Cancellation
	Open Duplex
	Adapter Jitter Buffer
	10 Watt Class D Amplifier
	Electret Microphone
Management and Operation:	HTTPS (Web Configuration)
	DHCP and static IP
	Remote Software Upgrade
	Centralized Monitoring
	Status LED
Remote Control:	6 I/O’s tool less and one relay

www.zenitel.com info@zenitel.com Last revision date: 2025-10-31 13:39

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Remote Control	contact
Operating temperature range	-25° to 70° C / -13° to 158 ° F
Storage temperature range	-25° to 70° C / -13° to 158 ° F
Warranty	3 Years standard warranty

Accessories



TA-13

Turbine Mini On-Wall Back Box White

Item Number: 1008140130



TA-2

US 2-Gang 3½" Deep Backbox

Item Number: 1008140020



TA-3

2½" Deep Flushmount Backbox for Turbine Compact & & Mini

Item Number: 1008140030

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.