zenitel

DATASHEET

1015886

UPS-NRT4-U030B

Online UPS, 3000W/3min, 230V, w/rails



- Online double-conversion UPS with pure sinewave output
- Full digital control and output power factor = 1
- Wide input voltage range (110–300 VAC)
- Rack/tower convertible with dot-matrix LCD display
- Multiple communication interfaces (USB, RS232, dry contacts, intelligent slot)
- Supports EBM modules for extended backup time

Description

The UPS-NRT4-U030B is designed to provide continuous, high-quality power protection for critical onboard equipment. Its online double-conversion design ensures stable output independent of fluctuations in vessel or platform power systems.
This UPS is ideal for maritime and offshore applications such as PAGA controllers, intercom systems, IP telephony, navigation equipment, monitoring systems, and critical automation. With flexible communication ports, integrated battery management, and support for extended battery modules, it delivers reliable runtime and safe shutdown capabilities in demanding marine and energy environments.

UPS-NRT4-U030B Runtime overview:

- 3000 W / 4 min → no additional battery module
- 1900 W / 31 min → with one additional UPS-NRT4-B030 battery module
- 3000 W / 33 min → with two additional UPS-NRT4-B030 battery modules
  - (Note: An additional rail kit is required for this combination)


Technical Dimensions

www.zenitel.com info@zenitel.com

Last revision date: 2026-07-01 12:30

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

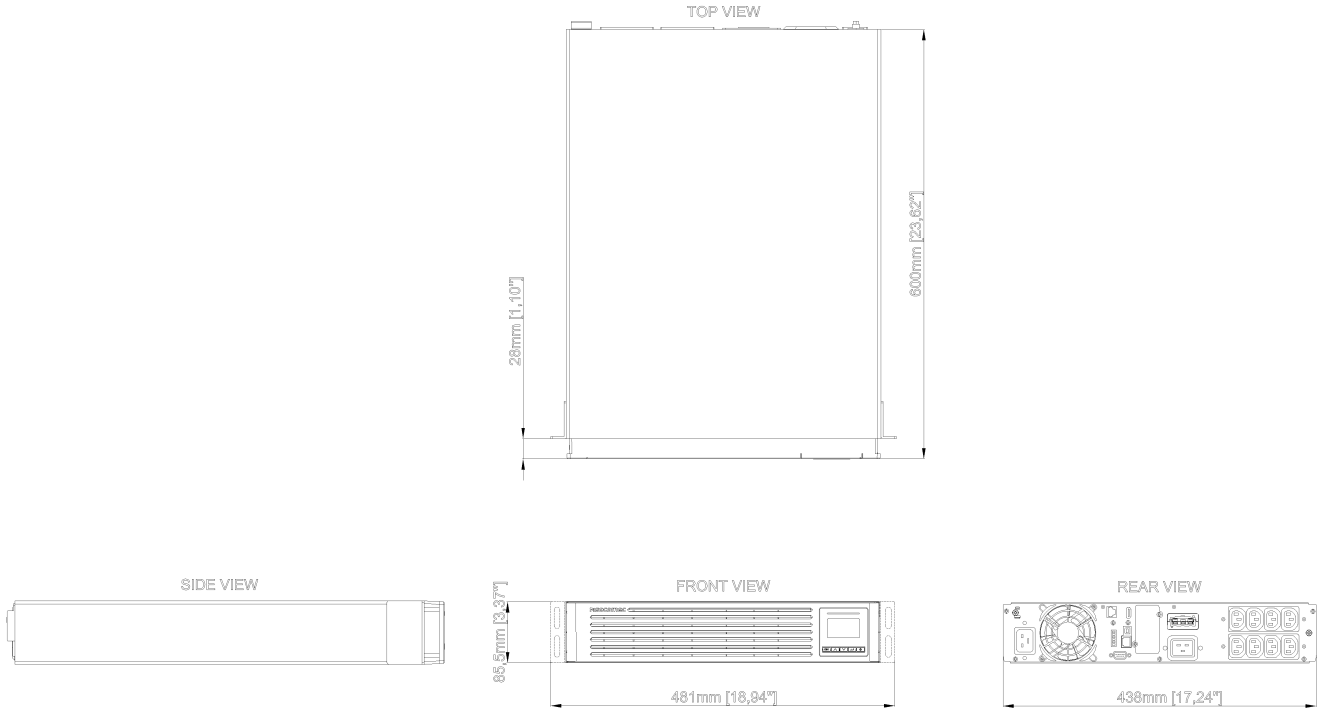

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Sn	3000 VA
Pn	3000 W
Architecture	Online duble conversion VFI with input PFC and automatic bypass
Input Rated Voltage	230 V (1ph)
Input Voltage Tolerance	110 V ÷ 300 V ; (160 V ÷ 300 V @100% load)
Input Power factor / THDI	> 0.99 / < 5%
Output Rated Voltage	230 V (1ph)
Output Voltage Tolerance	selectable 200/208/220/230/240 V ±1%
Output Frequency Tolerance	± 0,1 Hz
Output Power factor	1
Efficiency	Up to 94.1% online mode
Overload capability	Up to 105% continuously; 125% x 5 min; 150% x 30 sec
Dimensions W x D x H	438 x 600 x 85.5 mm
Weight	26.1 kg
IP Rating	IP20

Accessories



UPS-NRT4-CARD

I/O card for Netys RT

Item Number: 1015888

www.zenitel.com info@zenitel.com Last revision date: 2026-07-01 12:30

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Used With



UPS-NRT4-B030

External Battery Module for 2 kVA and 3 kVA UPS Systems

Item Number: 1015885

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.