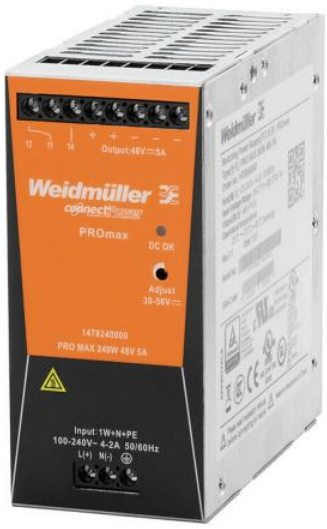


2990000046

PROMAX-240-48

Power supply 100-240VAC/48VDC 5A

- High-performance 240 W switch-mode power supply with stable 48 VDC output
- Handles continuous overload up to 20% and peak loads up to 300% for demanding applications
- High efficiency of up to 92.5%, reducing energy consumption
- Flexible input voltage range (85–277 VAC / 80–370 VDC) for global applications
- Advanced protection features including short-circuit, overload and reverse voltage protection
- Adjustable output voltage via front-mounted potentiometer
- DIN rail mounting
- DNV approved

Description

The PROMAX-240-48 is a high-performance switched-mode power supply designed for demanding industrial applications. It delivers a reliable 48 VDC output with a power rating of 240 W, ensuring stable operation even under dynamic load conditions. With its compact design and high efficiency, it optimizes space and reduces energy consumption in control cabinets. The unit features robust construction, wide temperature tolerance, and excellent overload capacity for maximum reliability.


Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-05-14 09:40


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


FRONT VIEW

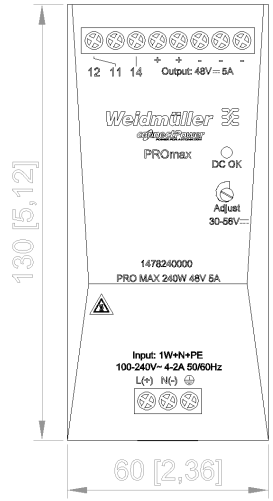

SIDE VIEW

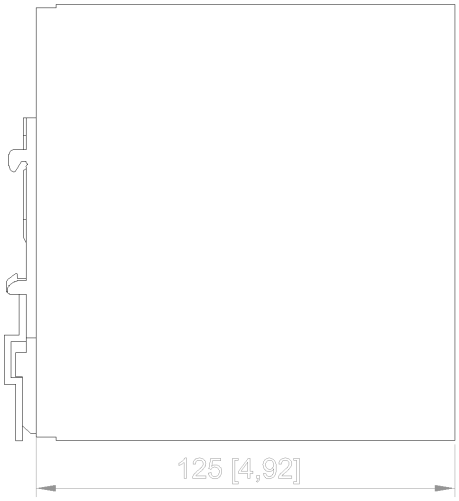

TOP VIEW

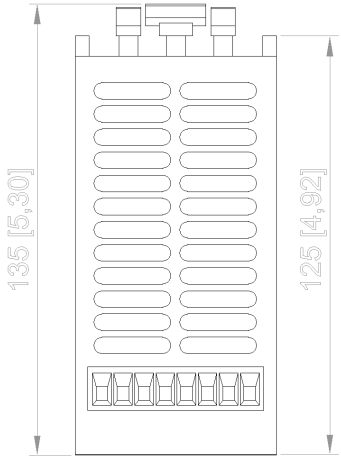

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Input Voltage Range (AC)	100-240 VAC
Input Voltage Range (DC)	80-370 VDC
Input Frequency Range (AC)	45-65 Hz
Current Consumption	1.5 A @ 230VAC / 3 A @ 120 VDC (in relation to the input voltage)
Inrush Current	max. 15 A
Nominal Power Consumption	259.5 VA
Output Power	240 W
Rated Output Voltage	48 VDC ± 1 %
Output Voltage Range	30-56 VDC (adjustable via potentiometer)
Nominal Output Current	5 A @ 60 °C (for UNominal)
Efficiency	92.5%
Protection Degree	IP20
Installation	Horizontal on TS35 mounting rail
Input Fuse (internal)	Yes
Recommended Back-up Fuse	10 A, char. B circuit breaker, 6-8 A, char. C circuit breaker
Connection System	Screw connection
Dimensions W x D x H	60 x 125 x 130 mm
Weight	1050 g

www.zenitel.com info@zenitel.com Last revision date: 2026-05-14 09:40

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.