

1021001200

VSS-SP

VSS Slave Panel - V2 This item has been replaced by Phontech Sound Reception System





This product will be replaced by the equivalent [Phontech solution](#), but Zenitel will honor prior commitments given to the market. Therefore, we will continue to provide expansion and spare-part service for this product.




Description

- ✓ Flush Mounting
- ✓ Brushed aluminum with foil
- ✓ Operation voltage 24V DC
- ✓ Adjustable volume
- ✓ Adjustable dimmer
- ✓ Override function
- ✓ 8 Indicator LEDS
- ✓ NEW: Reverse LED indication functionality. See manual for details. From revision 2.05

Technical Dimensions

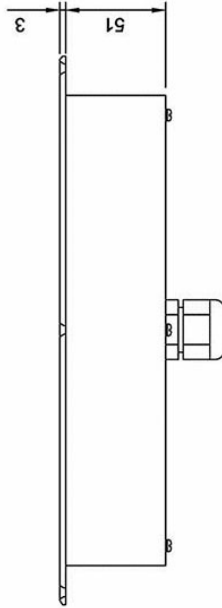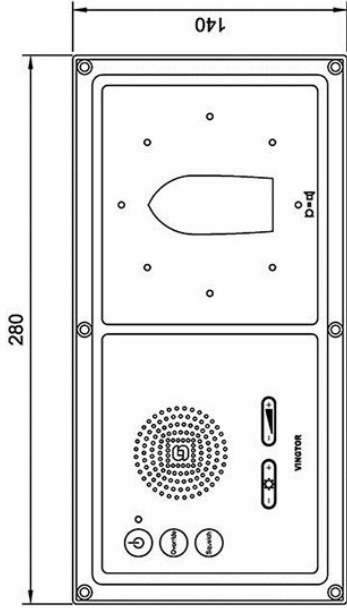

CABLE INLET 1 x PG-16

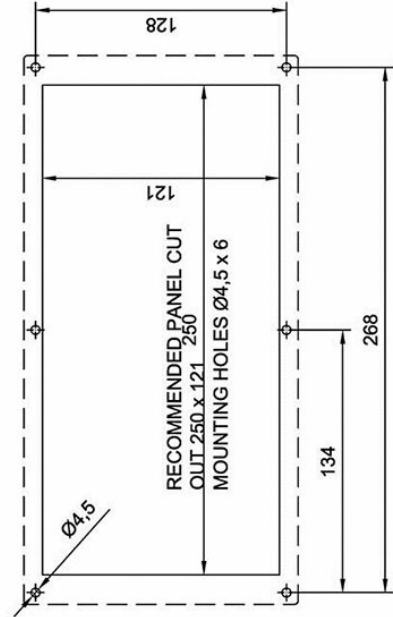

Specifications

GENERAL

Dimensions (WxHxD)	280 x 140 x 51 mm
Power	Internal from the master panel
Mounting	Flush
Housing	Brushed aluminum with foil
IP rating	IP-22
Operation voltage	24V DC
LEDs	8
Buttons	Override, Dimmer, Volume
Weight	0.7 kg

Used With



VSS-MP

VSS Master Panel - V2 This item has been replaced by Phontech Sound Reception System