

- Column Loudspeaker
- 20W 100V
- Length 20" (500mm)
- Swivel-bracket mounting
- Aluminium housing
- Weatherproof to IP66
- Full range sound quality
- Option with DC capacitor fitted
- Certified to EN 54-24



OVERVIEW

The SPCO-20W-200-EN54 is a 20W 100V column loudspeaker, which has four 3" (77mm) full-range loudspeaker chassis providing high sound quality with speech and background music, and which is certified to EN 54-24. The speaker is fitted with a 100V transformer which has four power adjustment tappings of 20W, 15W, 10W and 5W.

The SPCO-20W-200-EN54 has a powder coated shock-resistant metal chassis and grille, with the high quality powder coated finish giving good long-term protection and resistance to corrosion. The enclosure uses PG9 cable glands and is sealed to the IP66 environmental standard. Thus the speaker is protected against the ingress of dust, and is sealed against high-pressure water jets. As standard the speaker is coloured to match RAL9006 'White Aluminium', however the speakers can be supplied in any four-digit RAL or NCS colour, as a special order.

The speaker is mounted using a multi-direction swivel bracket, which provides great flexibility in the orientation of the speaker relative to its mounting location. The 100V loudspeaker line cabling is connected by means of a two-pin ceramic block, for additional reliability, the speaker chassis features vibration-damping construction. This speaker is compliant with the British Standard BS 5839, Part 8.

The loudspeaker is optionally available with a DC blocking capacitor fitted, in order to provide compatibility with DC loudspeaker line monitoring systems. The part number for this DC monitoring compatible version is SPCO-20W-200-EN54-DC.

Enhanced Acoustic Simulator for Engineers (EASE) data is available for this speaker on request.

TECHNICAL DATA

Power Tappings	20W / 15W / 10W / 5W
Impedance (100V)	500 / 667 / 1000 / 2000 Ohms
DC Capacitor (SPCO-20W-200-EN54-DC Version only)	4.7µF 250 VDC
Frequency Range	217 – 16,900 Hz
Frequency Response	147 – 23,500 Hz
SPL 1W / 1m, peak	100,3 dB
SPL 1W / 4m, peak	88,3 dB
SPL Pmax / 4m, peak	101,3 dB
SPL IEC 60268-5 1W/1m	92,0 dB
SPL IEC 60268-5 Pmax/1m	105,0 dB
SPL EN54-24, Pmax/4m	94,0 dB
Sensitivity EN 54-24, 1W / 4m	80,5 dB
Dispersion (-6dB, 500Hz) Horizontal / Vertical Plane*	360° (horizontal) / 124° (vertical)
Dispersion (-6dB, 1KHz) Horizontal / Vertical Plane*	188° (horizontal) / 65° (vertical)
Dispersion (-6dB, 2KHz) Horizontal / Vertical Plane*	149° (horizontal) / 38° (vertical)
Dispersion (-6dB, 4KHz) Horizontal / Vertical Plane*	86° (horizontal) / 14° (vertical)
Temperature Range	-25 / +70°C
Dimensions	510 x 100 x 92 mm
IP Rating	IP66
Weight (net)	2.90 kg
Colour	RAL9006
Connector	2-pin ceramic block
Mounting	Swivel bracket
Maximum Cable Passage	8 mm ²
Compliance	EN 54-24 / BS 5839, Part 8

*** EN 54-24 Definitions for Speaker Reference Axis, Point, Plane + Horizontal & Vertical Planes:**

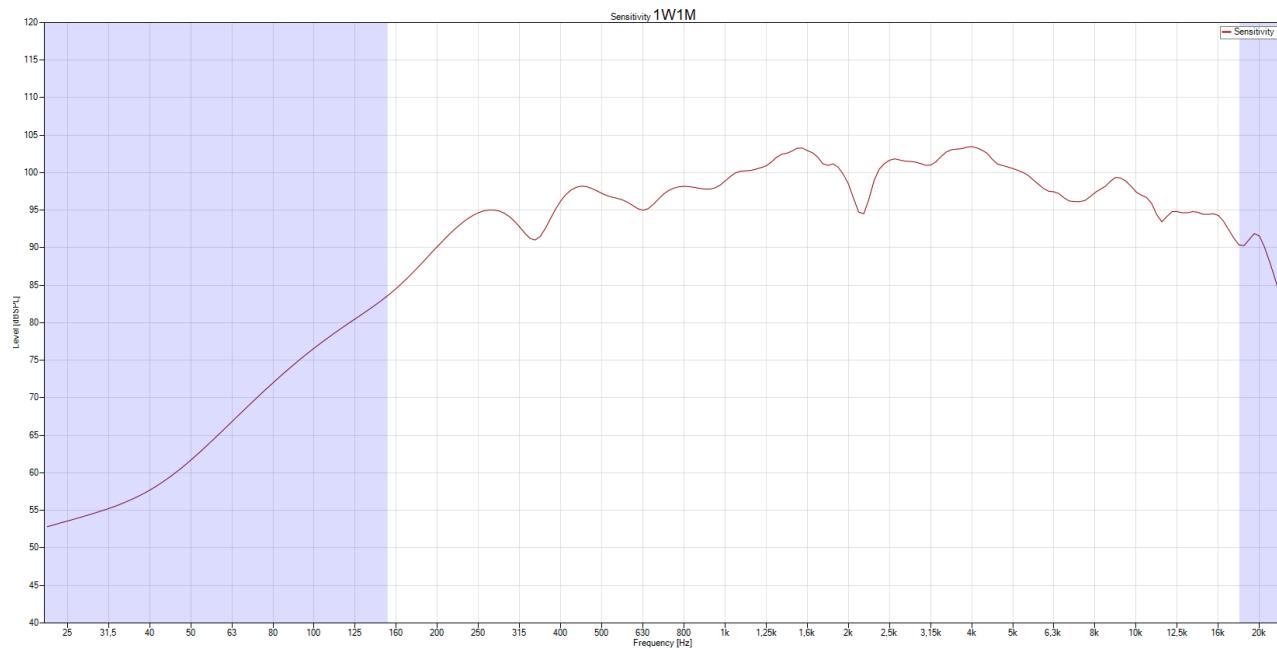
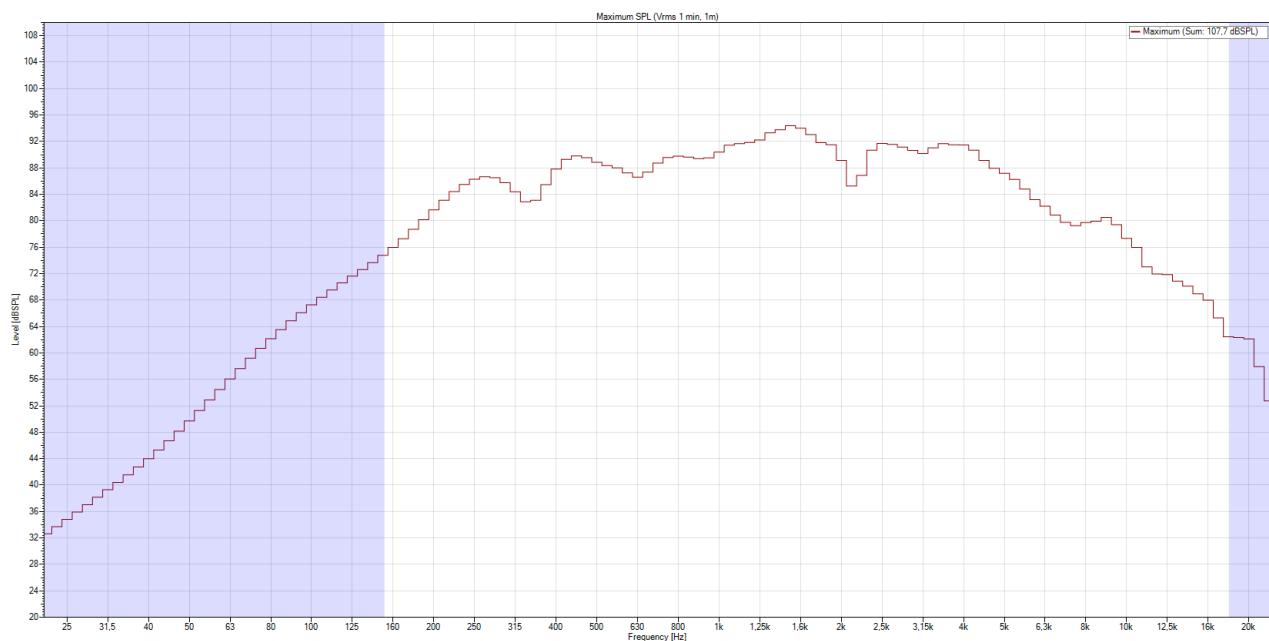
- Reference Axis: Axis is through the centre of the speaker grille surface and is perpendicular to the grille surface.
- Reference Plane: Plane is across the front of the speaker grille surface and is perpendicular to the reference axis.
- Horizontal Plane: Plane contains the reference axis and is perpendicular to the reference plane.
- Vertical Plane: Plane contains the reference axis and is perpendicular to the reference plane.
- Reference Point: Point is at the centre of the front of the speaker grille surface where all the above intersect

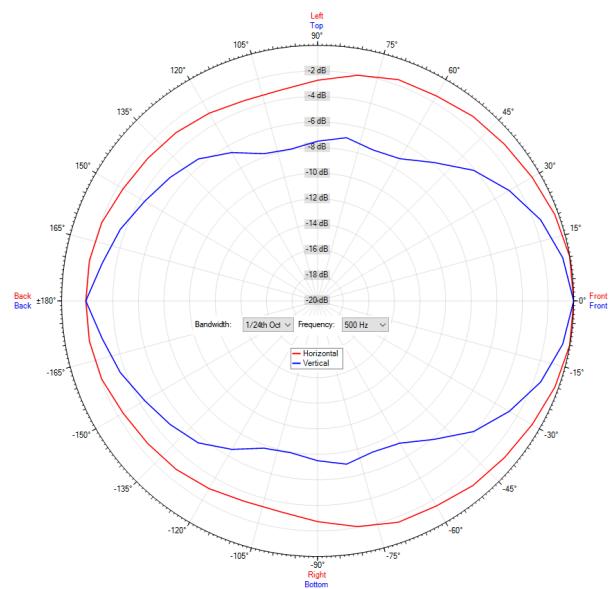
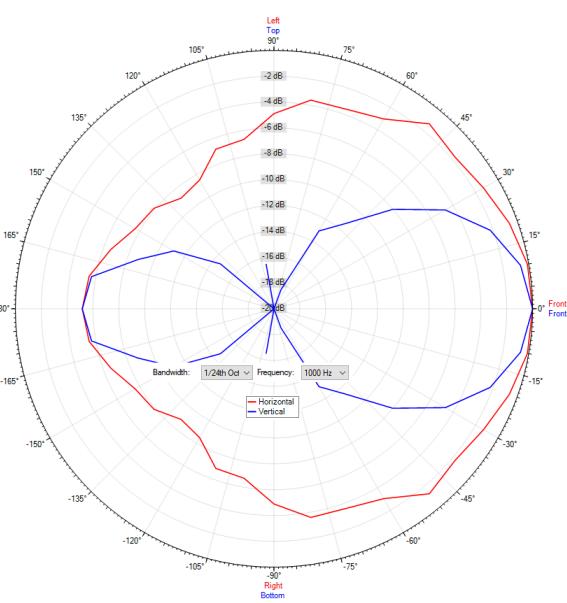
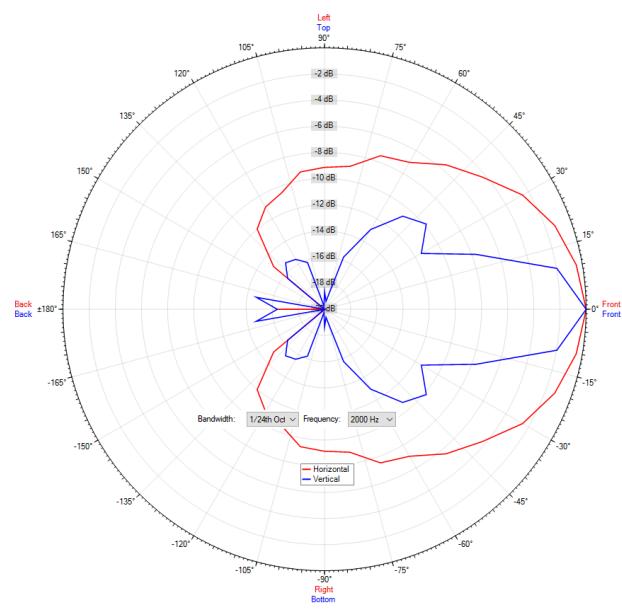
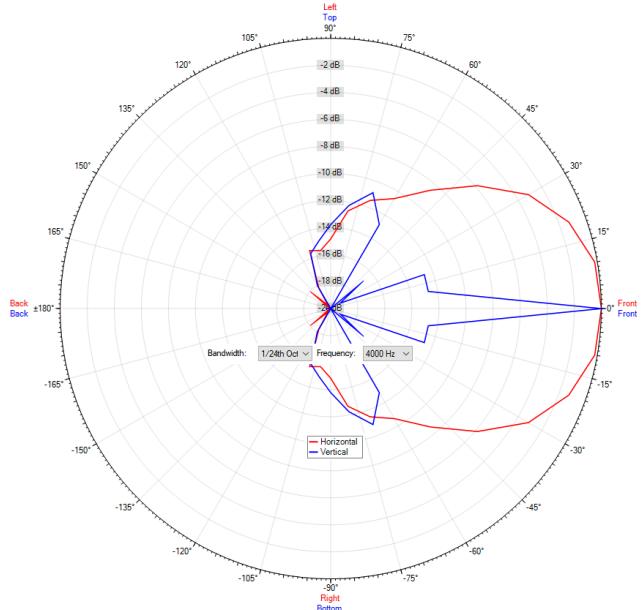
All measurements in the table above relate to the Reference Axis unless otherwise stated

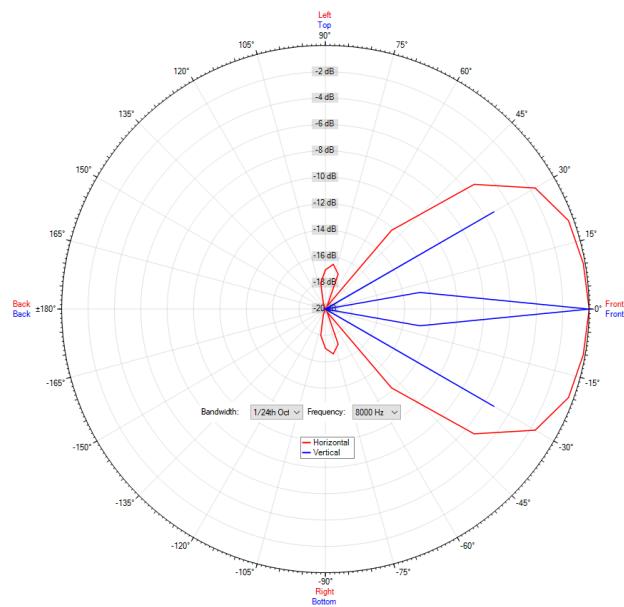
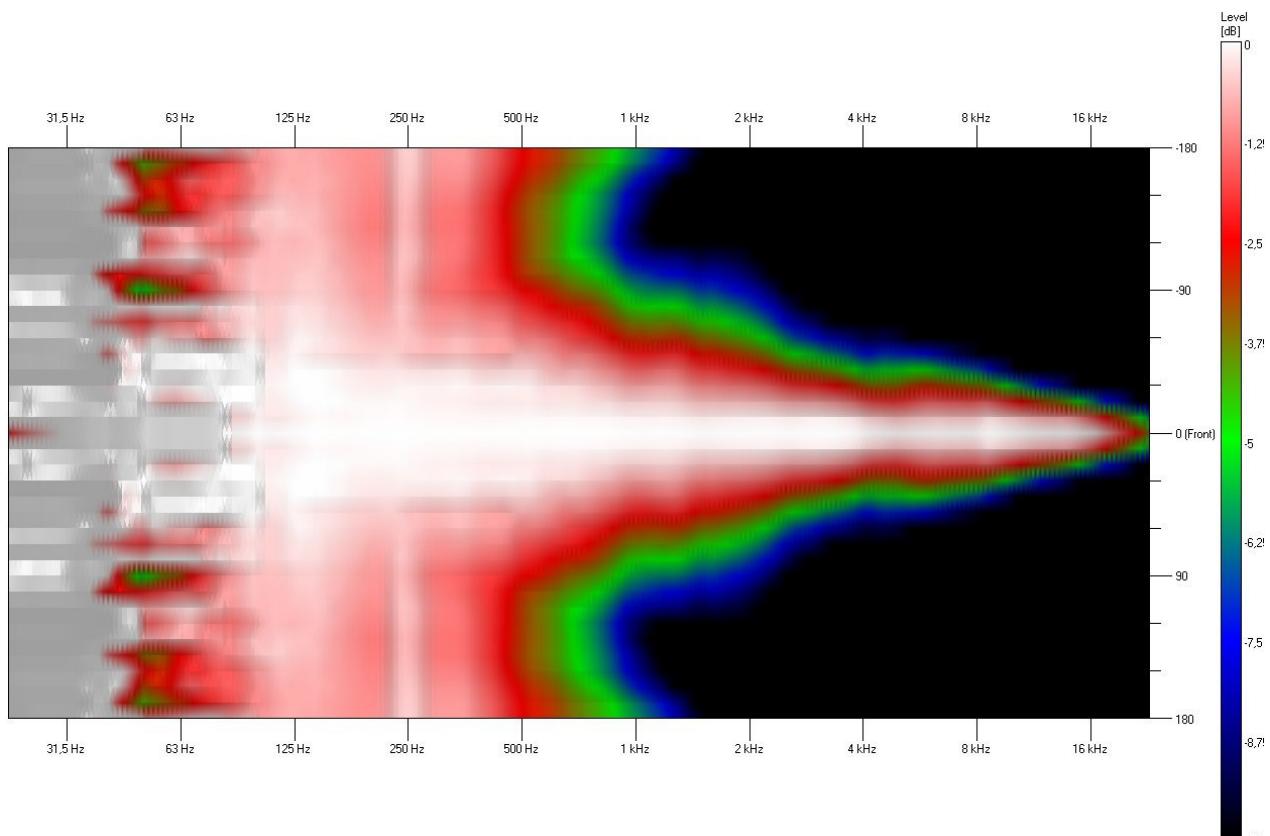
EN 54-24 Annex A, Measurement Environments:

Flush-mounted loudspeakers e.g. ceiling loudspeakers, shall be measured under half-space free field conditions.

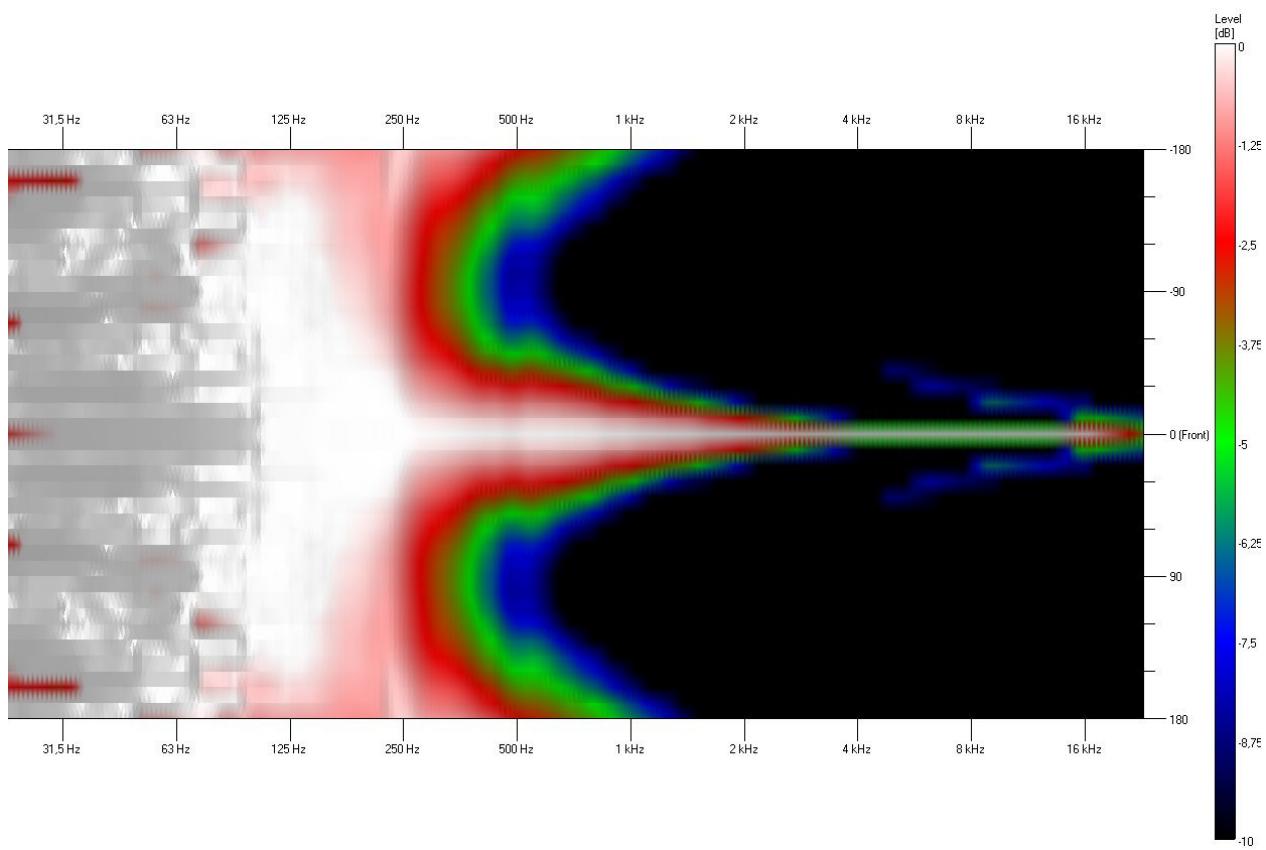
All other speakers shall be measured under free-field conditions or in a ground plane arrangement that simulates a free-field condition

FREQUENCY RESPONSE DIAGRAM—SENSITIVITY 1W / 1m

FREQUENCY RESPONSE DIAGRAM—MAXIMUM SPL (Vrms 1 min, 1m)


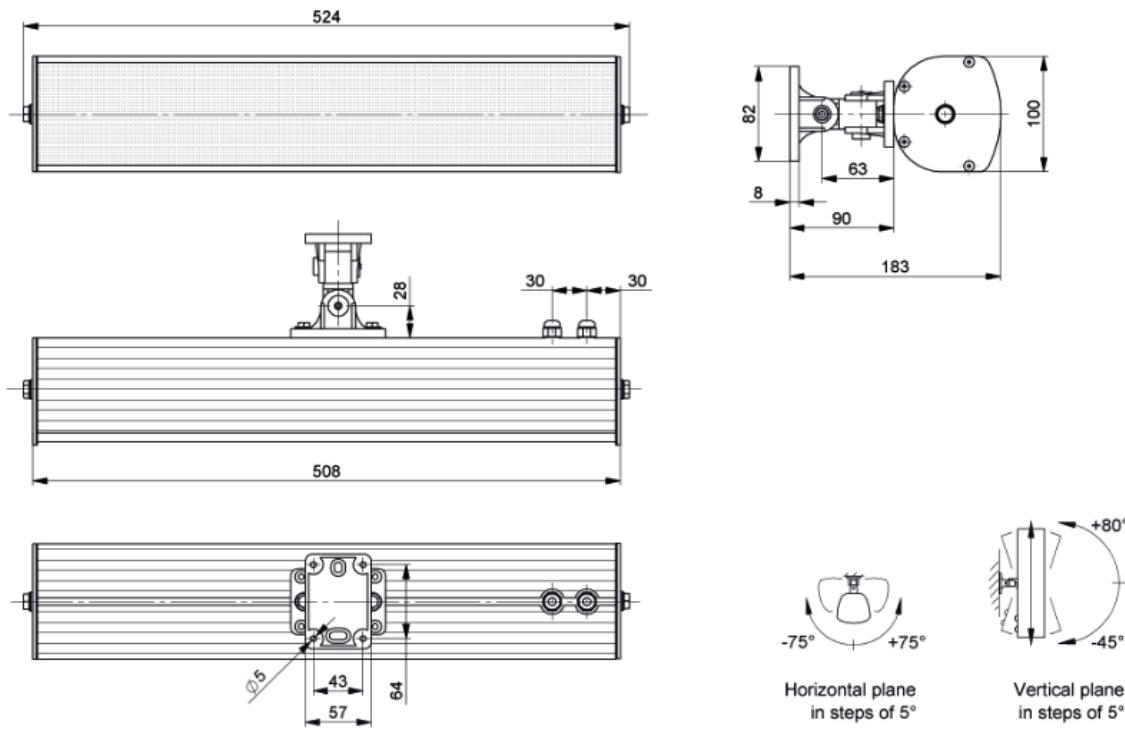
POLAR DIAGRAMS
500 Hz

1,000 Hz

2,000 Hz

4,000 Hz


POLAR DIAGRAMS
8,000 Hz

ISOBAR - HORIZONTAL


ISOBAR - VERTICAL



DIMENSIONAL DIAGRAM



This equipment is designed and manufactured to conform to the following EU Directives:

CE Low Voltage: 2014/35/EU
Restriction of Hazardous Substances (RoHS): 2011/65/EU & 2015/863/EU



Made for:

Zenitel GB Limited

Unit 17 - Cliffe Industrial Estate - Lewes - East Sussex - BN8 6JL - U.K.

www.zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel, Vingtor-Stentofon and Phontech products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice. **ZENITEL PROPRIETARY.** This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.