
zenitel

DATASHEET

3005010045

MI-2

Préamplificateur microphone multifonction

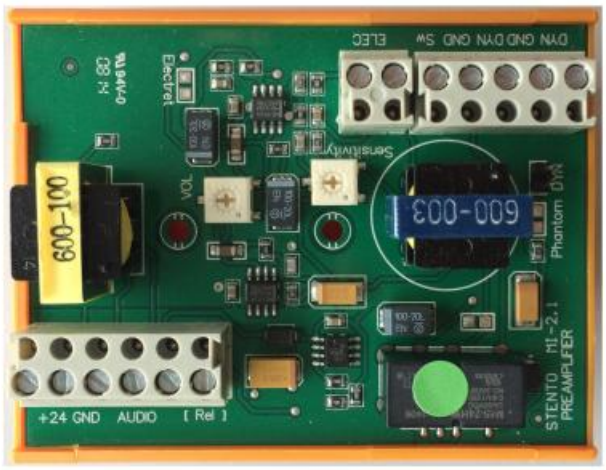

Description

- Préamplificateur pour microphone
- Sélection microphone électret ou dynamique
- Potentiomètre pour ajuster volume et sensibilité
- 24 VDC
- Jeu de contact 230 VAC ou 24 VDC
- Montage sur rails NS-35

www.zenitel.com info@zenitel.com

Last revision date: 2023-10-11 13:41

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spécifications

GÉNÉRAL

Dimension (LxH)	45 x 70 mm
Montage	Montage sur rails NS-35
Boîtier	ABS, PCB
Tension de service	24 VDC / consommation électrique max 0,65 W
Intensité du contact	230 VAC ou 24 VDC
Jeu de contacts	1 pcs. C/NO
Terminaux	2,5 mm2
Poids	0.2 kg

NIVEAUX D'ENTRÉES/SORTIES

Entrée	2 mV
Sortie	0 dB

www.zenitel.com info@zenitel.com Last revision date: 2023-10-11 13:41

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

CONNEXIONS

Terminal	Position	Description
Entrée	1	Microphone dynamique
	2	Terre/blindage
	3	Microphone dynamique
	4	Terre/blindage
	5	Switch in/PTT
Terminal	Position	Description
Entrée	1	Microphone électret
	2	Microphone électret
Terminal	Position	Description
Entrée	1	+24 VDC
	2	Terre
Sortie	3	Sortie audio
	4	Sortie audio
	5	Relais
	6	Relais

www.zenitel.com info@zenitel.com Last revision date: 2023-10-11 13:41

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.