2340110020

SPA-M6-V2



REPLACED BY: SPA-M6-V2 PA Panel for alarm distribution to zones (zenitel.com)

Onboard communication

Description

Zenitel SPA-M6 V2 Panel gives messages in one to six zones in a SPA-V2 public address and general alarm single system. Installation in consoles or on-wall indoor.

Function Local mute is used for instances where feedback is caused by close proximity between a PA panel and a loudspeaker. This function must be in combination with relay box.


Note: Microphone must be ordered separately.


Technical Dimensions


www.zenitel.com info@zenitel.com Last revision date: 2025-08-05 12:23

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

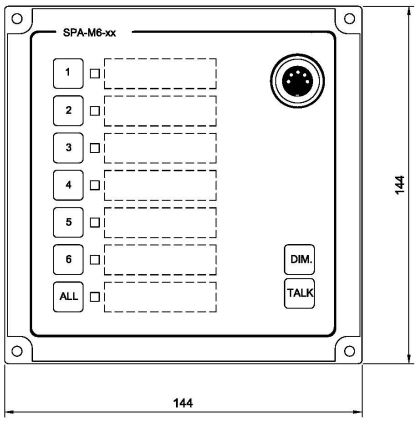

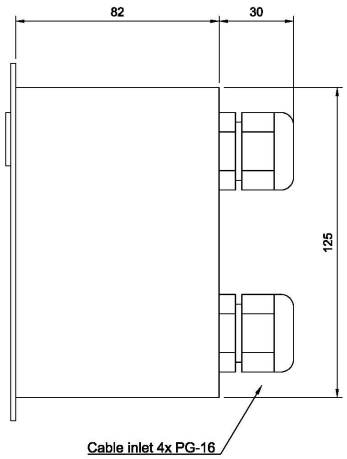

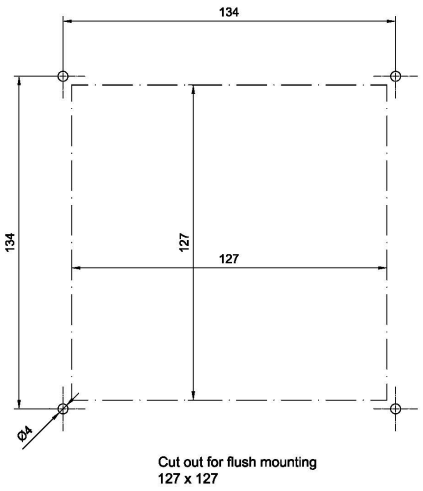

Related Item:

SPA-M6BOKS Wall mounting box for SPA-M1/M6 panels Item.no. 3005010155

MB-30G Gooseneck Microphone Item.no.3005020033

ETC-1-TB Hand Microphone Item.no.3005020029


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Size (WxHxD)	144 x 144 x 82
Weight w/microphone	0. 5 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775Vrms / 0dB
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75 mm2
Local mute relay, output	24V DC @ maximum 50mA
IP-rating	IP-44
Operating temperature	-15°C to +55°C
Environmental Condition	Protected

Accessories



SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels

Item Number: 3005010155



MB-30G

Gooseneck Microphone

Item Number: 3005020033



ETC-1-TB

Hand Microphone

Item Number: 3005020029



PAM2H

Handheld Microphone for SPA-V2 indoor panels.

Item Number: 1023533013

www.zenitel.com info@zenitel.com Last revision date: 2025-08-05 12:23

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.