

3005010150

SPA-M1-V2

REPLACED BY: [SPA-M1-V2](#)
[Zenitel](#)

Onboard communication

Description

- ✓ PA Panel for single system, all call
- ✓ Built-in pre-amplifier with preset signal level and tone controls
- ✓ TALK button on panel
- ✓ Flush mounting, back box for wall mounting is available
- ✓ Local mute contact for external loudspeaker


This panel gives All Call Message in a SPA-V2 public address and general alarm single system. Installation in consoles or wall indoor.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. This

function must be in combination with relay box.

Note: Microphone must be ordered separately.

Technical Dimensions

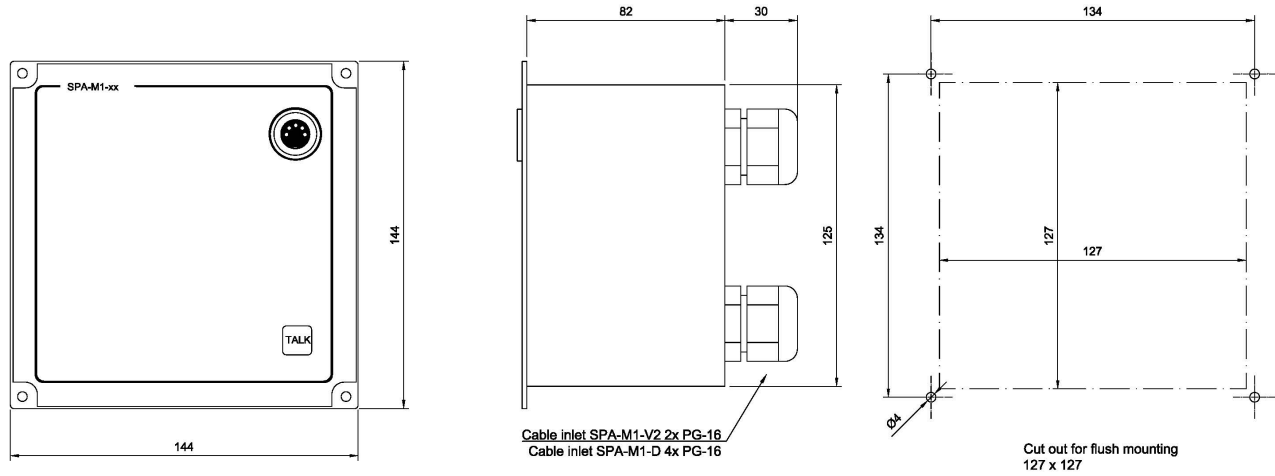

Related item:

SPA-M6BOKS Wall mounting box for SPA-M1/M6 panels Item.no. 3005010155

MB-30G Gooseneck Microphone Item.no.3005020033


ETC-1-TB Hand Microphone Item.no.3005020029

Specifications

GENERAL

Size (WxHxD)	144 x 144 x 82
Weight w/microphone	0.5 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775Vrms / 0dB
Connections	Plugable screw terminals for 2.5 mm ² cable
Cable glands	2 x PG-16
Cable size	6 x 2 x 0.75mm ²
Local mute relay, output	24V DC @ maximum 50 mA
IP-rating	IP-44
Environmental Condition	Protected

Accessories



SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels

Item Number: 3005010155



MB-30G

Gooseneck Microphone

Item Number: 3005020033



ETC-1-TB

Hand Microphone

Item Number: 3005020029



PAM2H

Handheld Microphone for SPA-V2 indoor panels.

Item Number: 1023533013