


1000670

## EBMDR-8-B

Exigo Button Expansion Module, 8 Buttons, Blue function LED



- ✓ Button expansion module for ECPIR-x
- ✓ Powered from ECPIR-x
- ✓ Eight programmable buttons with individual labels and status indicators
- ✓ Optional button protection covers
- ✓ Four units can be connected to one access panel




Exigo

## Description

The EBMDR-8 button expansion module is developed for expanding the button capacity of the ECPIR-x access panels or intercom. Each button features eight fully programmable buttons that can be used to manually initiate alarms, select zones, or any other action in the Exigo system.

Each of the module's buttons features two independent indicators that show the status of the button's function. Up to four EBMDR-8 button expansion modules can be daisy chained to one console panel.

## Technical Dimensions

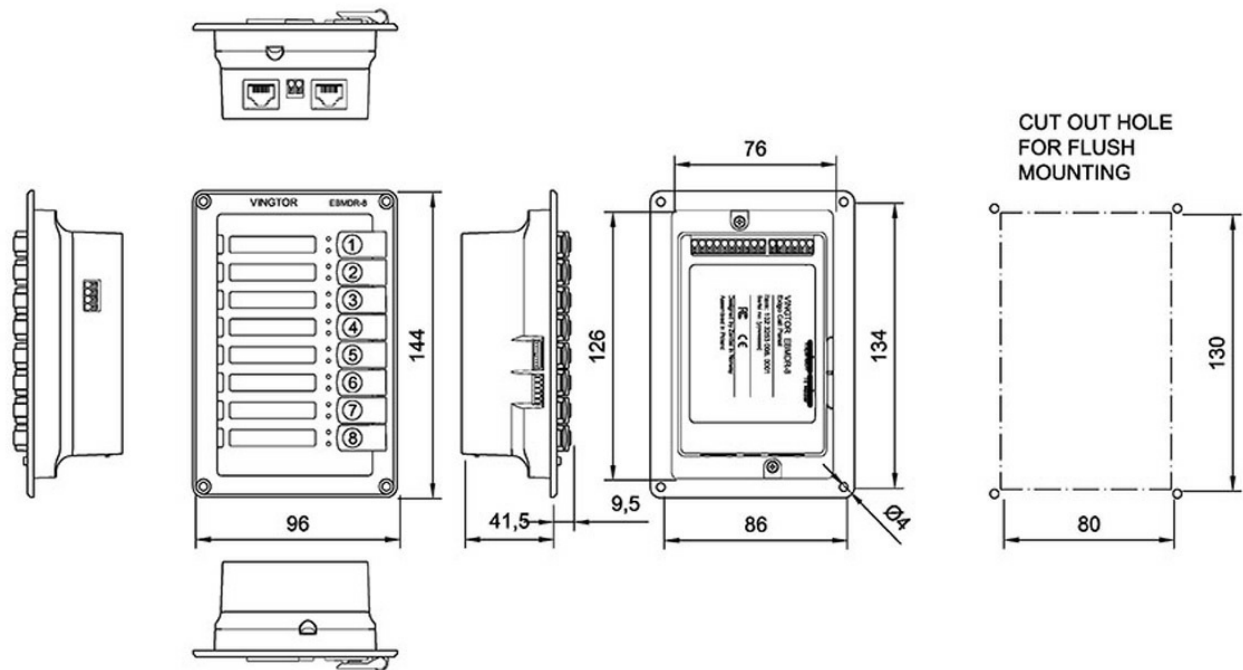

# Specifications

## MECHANICAL

|                     |                    |
|---------------------|--------------------|
| Dimensions (HxWxD): | 144 x 96 x 41.5 mm |
| Weight:             | 500 g              |

## ENVIRONMENTAL

|                                  |                             |
|----------------------------------|-----------------------------|
| Operating temperature:           | -10°C to +60 °C             |
| Operating humidity:              | 10% to 95% (non-condensing) |
| Storage temperature:             | -40°C to +70°C              |
| Storage humidity:                | 10% to 95% (non-condensing) |
| Air pressure:                    | 600 hPa to 1300 hPa         |
| IP rating:                       | IP-32                       |
| Magnetic Compass Safe Distance   | 60 cm                       |
| IEC 60945 Environmental Category | Protected                   |
| Operator & Reading Distance      | 0,71 m                      |

## CERTIFICATIONS

|            |   |
|------------|---|
| Immunity:  | EN 60945, EN 50130-4, EN 61000-6-1, EN 61000-6-2, EN 55103-2, FCC-47 part 15B |
| Emissions: | EN 60945, EN 50130-4, EN 61000-6-3, EN 61000-6-4, EN 55103-1, FCC-47 part 15B |
| Safety:    | UL 60950-1, cUL 60950-1, CB to IEC 60950-1                                    |

## Accessories



#### EMBR-1

Mounting Box for ECPIR, EAPIR and EBMDR-8 Panels



#### EMBR-2

Mounting Box for ECPIR, EAPIR and EBMDR-8 Panels



Product image not available

#### Mounting plate for Exigo Access Panels - 2

Mounting plate for 2 pcs. Exigo Access Panel, 19" 4HU



Product image not available

#### Mounting plate for Exigo Access Panels - 3

Mounting plate for 3 pcs. Exigo Access Panel, 19" 4HU

## Used With



#### ECPIR-3P

Exigo Access Panel / Turbine Intercom



#### ECPIR-P

Exigo Call Panel, PTT Button



#### EAPIR-8

EXIGO Alarm Panel, 8 buttons