



4000014774

## P-6035/10

### Headset with 10-meter Cable

- 10-meter cable
- Low smoke and halogen free cable
- Rugged headset for Industrial environments
- ON/OFF Switch
- Excellent noise performance
- High attenuating ear shells
- CENELEC safety standards: EN 60079-0: 2012 + A11: 2013 & EN 60079-11: 2012
- IEC safety standards: IEC 60079-0: 2011, IEC 60079-11: 2011


## Description

The P-6035/10 is a hearing protective headset for use together with Intercom Systems in noisy environments. P-6035/10 is equipped with high attenuating shells with optimized acoustic design and excellent space for the ears for the best possible sound quality and comfort.

The P-6035/10 comes with a quick positioning noise-cancelling boom microphone.

## Technical Dimensions

page 1/4

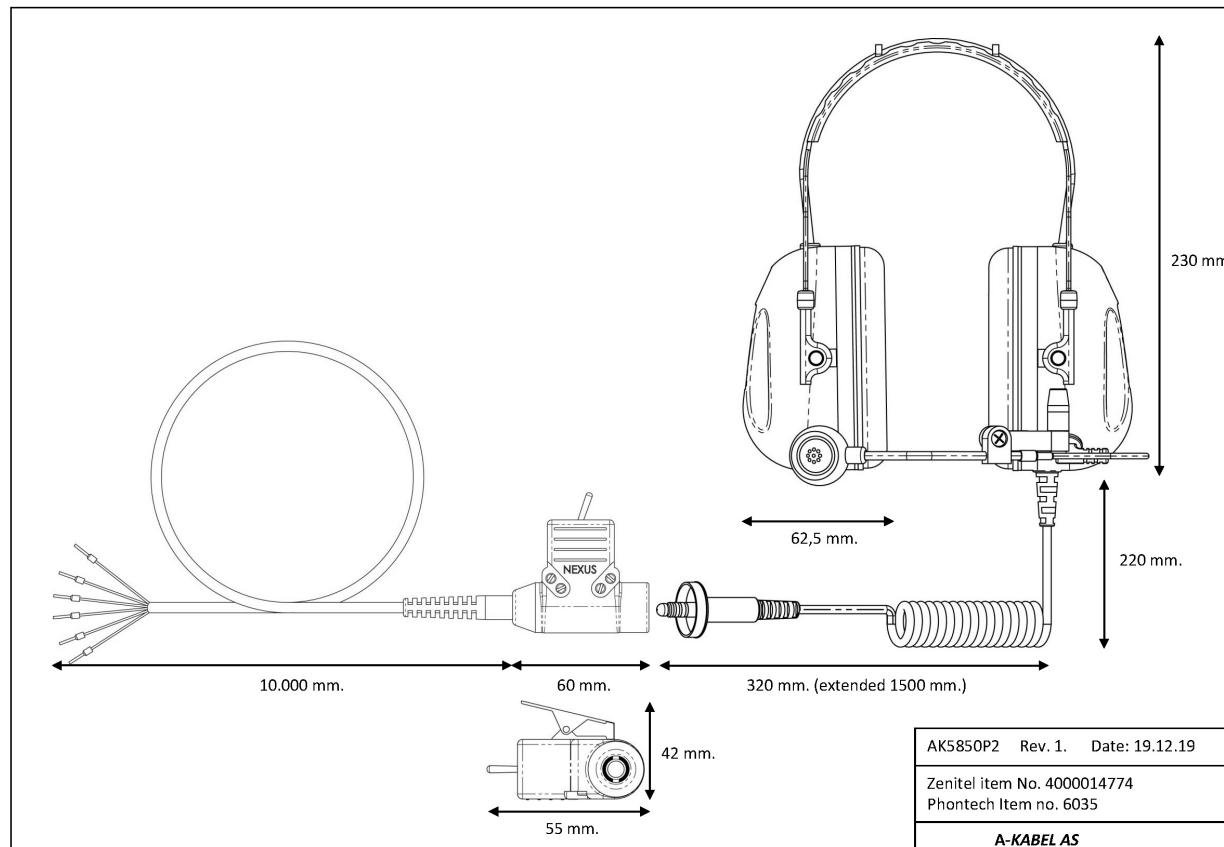

# Specifications

## MECHANICAL

Dimensions (HxD)	Approximately 230x125 mm
Weight	339 g without cable, 375 g with cable
Cable	10-meter flexible durable cable

## ELECTRICAL

Termination	Flying leads
Microphone	Dynamic, Noise Cancelling, -57+/-3dB (0dB=1V/pa 1 kHz), nom 230Ω. Frequency response: 50Hz-6KHz, 27 mm diameter.
Earphone	150Ω+/-15%, 124dB+/-3dB, 600-1200Hz

## ENVIRONMENTAL

Temperature	-30°C to +60°C
Humidity	<90% humidity, -20-+50°C
Ingress Protection Rating	IP-54
Attenuation Rating (HML)	H=31dB / M=26dB / L=20dB
Attenuation Rating (SNR)	29 dB

ORDER NUMBER	DESCRIPTION
4000017147	P-6035/15 Headset With 15m Cable

## Accessories

page 3/4



Hygiene kit for Headset

Hygiene kit for Headset



Spare Boom Microphone for Headset

Spare Boom Microphone for all A-Kabel type Headsets



Headset Stowage Bracket

Headset stowage Bracket for Wall mounting



**SPARE PART**

AK6070T Throat microphone for all A-kabel type Headsets

Dynamic Throat Microphone for Headset

## Used With



P-7212

Industrial VoIP Telephone



P-6212

Industrial Telephone