



4000014774

## P-6035/10

Headset with 10-meter Cable

- ✓ 10-meter cable
- ✓ Low smoke and halogen free cable
- ✓ Rugged headset for Industrial environments
- ✓ ON/OFF Switch
- ✓ Excellent noise performance
- ✓ High attenuating ear shells
- ✓ CENELEC safety standards: EN 60079-0: 2012 + A11: 2013 & EN 60079-11: 2012
- ✓ IEC safety standards: IEC 60079-0: 2011, IEC 60079-11: 2011


---

## Description

The P-6035/10 is a hearing protective headset for use together with Intercom Systems in noisy environments. P-6035/10 is equipped with high attenuating shells with optimized acoustic design and excellent space for the ears for the best possible sound quality and comfort.

The P-6035/10 comes with a quick positioning noise-cancelling boom microphone.

## Technical Dimensions

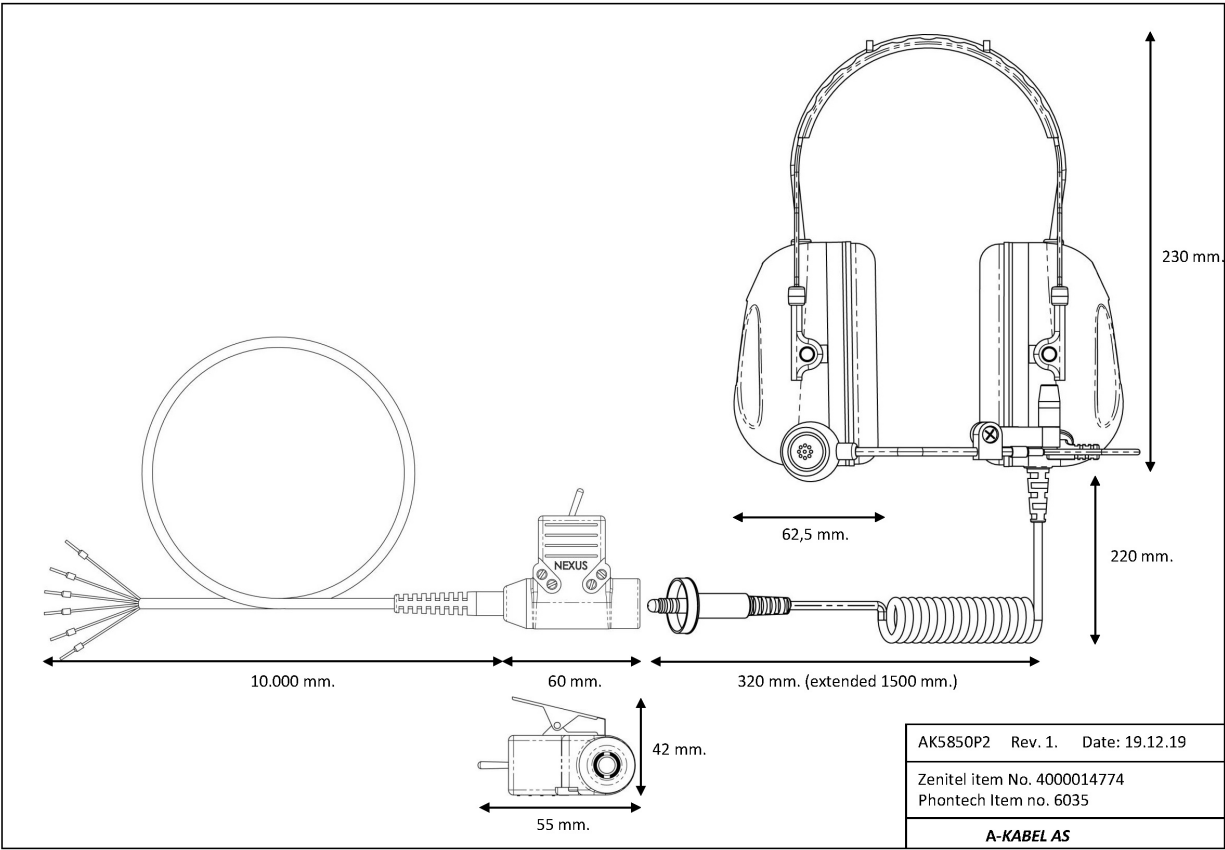

# Specifications

## MECHANICAL

|                  |                                       |
|------------------|---------------------------------------|
| Dimensions (HxD) | Approximately 230x125 mm              |
| Weight           | 339 g without cable, 375 g with cable |
| Cable            | 10-meter flexible durable cable       |

## ELECTRICAL

|             |                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------|
| Termination | Flying leads                                                                                                     |
| Microphone  | Dynamic, Noise Cancelling, -57+/-3dB (0dB=1V/pa 1 kHz), nom 230Ω. Frequency response: 50Hz-6KHz, 27 mm diameter. |
| Earphone    | 150Ω+/-15%, 124dB+/-3dB, 600-1200Hz                                                                              |

## ENVIRONMENTAL

|                           |                          |
|---------------------------|--------------------------|
| Temperature               | -30°C to +60°C           |
| Humidity                  | <90% humidity, -20-+50°C |
| Ingress Protection Rating | IP-54                    |
| Attenuation Rating (HML)  | H=31dB / M=26dB / L=20dB |
| Attenuation Rating (SNR)  | 29 dB                    |

| ORDER NUMBER | DESCRIPTION                      |
|--------------|----------------------------------|
| 4000017147   | P-6035/15 Headset With 15m Cable |
|              |                                  |
|              |                                  |
|              |                                  |

## Accessories



Hygiene kit for Headset

Hygiene kit for Headset



Spare Boom Microphone for Headset

Spare Boom Microphone for all A-Kabel type Headsets



Headset Stowage Bracket

Headset stowage Bracket for Wall mounting



AK6070T Throat microphone for all A-kabel type Headsets

Dynamic Throat Microphone for Headset

## Used With



P-7212

Industrial VoIP Telephone



P-6212

Industrial Telephone