zenitel

DATASHEET



1023533013

PAM2H

Handheld Microphone for SPA-V2 indoor panels.

- Handheld microphone for SPA-V2 indoor microphone panels.
- Bracket included
- Push-To-Talk button
- 1.5 m durable spiral cable
- Equipped with locking DIN plug
- Dynamic microphonee
- Undirectional noise cancelling
- Rugged brass housing
- Very long life switching contacts

Onboard communication

Description

The PAM2H handheld microphone is designed for indoor use, even in noisy areas with unidirectional noise cancelling. The microphone is used on all SPA-V2 microphone panels and features a PTT button.
For correct operation and performance speaking distance approximate 2cm.


Microphone will also be suitable for our legacy ETB and CTB Talk Back systems replacing ETC-1-TB.

Technical Dimensions


www.zenitel.com info@zenitel.com Last revision date: 2024-09-03 11:06

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

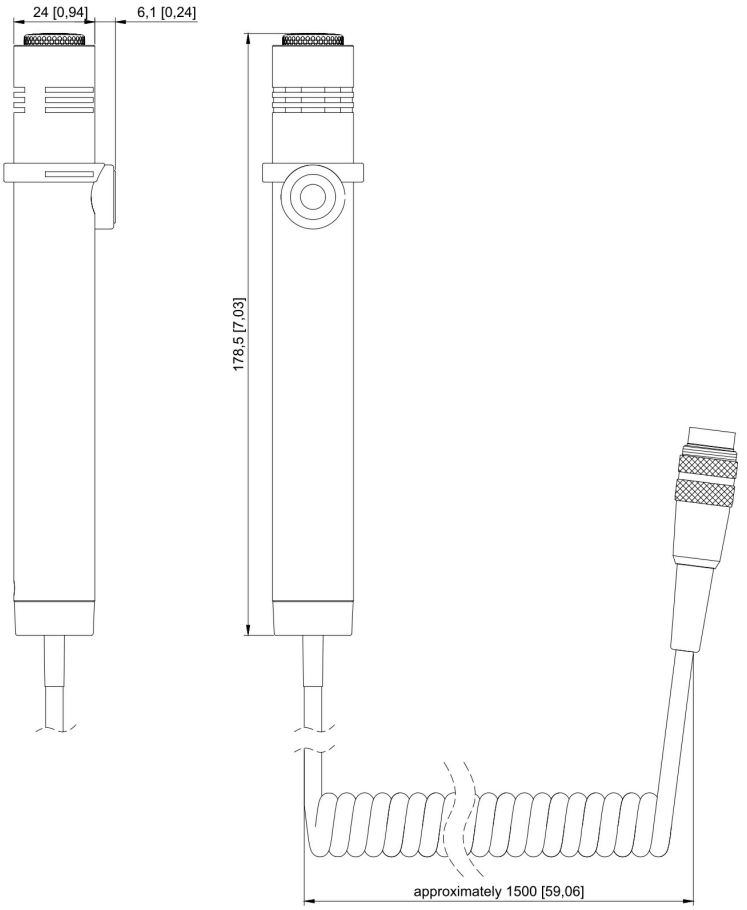

Microphone clip holder:

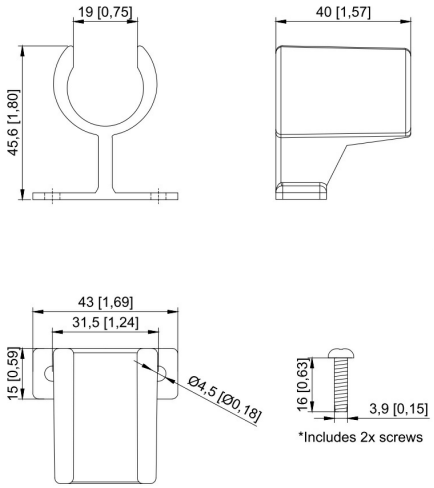

www.zenitel.com info@zenitel.com Last revision date: 2024-09-03 11:06

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

ITEM NUMBER	DESCRIPTION
1023533013	PAM2H Handheld PA microphone, 1 button, indoor, w/bracket. Dynamic

MECHANICAL	
Dimensions	Length 178 mm, Head Ø 29 mm, Body Ø 24 mm
Weight	0.23 kg
Cable	4-wire halogen free spiral cable, 2 Wires shielded, Draw length max. 1.5 m, without connector
Material	Brass. Black
Bracket	Included

ELECTRICAL	
Microphone	Dynamic and Noise Cancelling
Frequency range	150 Hz to 12 kHz at -10 dB
Sensitivity	1 mV/Pa (-60 dBV/Pa ± 3 dB)
Impedance	200 Ω ± 20 % at 1 kHz
Directivity	Cardioid (at 1 kHz; 180° - 20 dB)

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

ENVIRONMENTAL	
Operating Temperature	-20 °C to +60 °C
Storage Temperature	-30 °C to +70 °C
Humidity	10% to 95% (non-condensing)
Environmental Condition	Protected

COMPATIBLE EQUIPMENT
SPA-V2 Indoor panels

Accessories





ETC-1-CH

Chassis Contact 5-pin DIN for ETC-1-TB with 1M cable

Item Number: 3005020028

ETC-1/CABLE

Extension cable 10M w/ 5-pin DIN plug for handheld microphone

Item Number: 3005020027

Used With

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



SPA-M6-V2

Item Number: 2340110020



SPA-M6-D

Item Number: 2340110021



SPA-M1-V2

Item Number: 3005010150



SPA-M1-D

Item Number: 2340110019

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.