

3006100033

**CW-4T/VOF**

Wall Loudspeaker 6W with Volume Control and Override



---

## Description


- ✓ Wall loudspeaker with transformer for accommodation area
- ✓ Volume Control, Override and Fuse
- ✓ Ideal for PA, intercom and background music
- ✓ With 100V line transformer
- ✓ Bypasses volume control when 24VDC is present

Screw the bracket on the wall, and fasten the cabinet to the bracket with one screw.


For optimum performance, always use the correct voltage/power and operate within the frequency limits as stated.

## Technical Dimensions


REAR VIEW

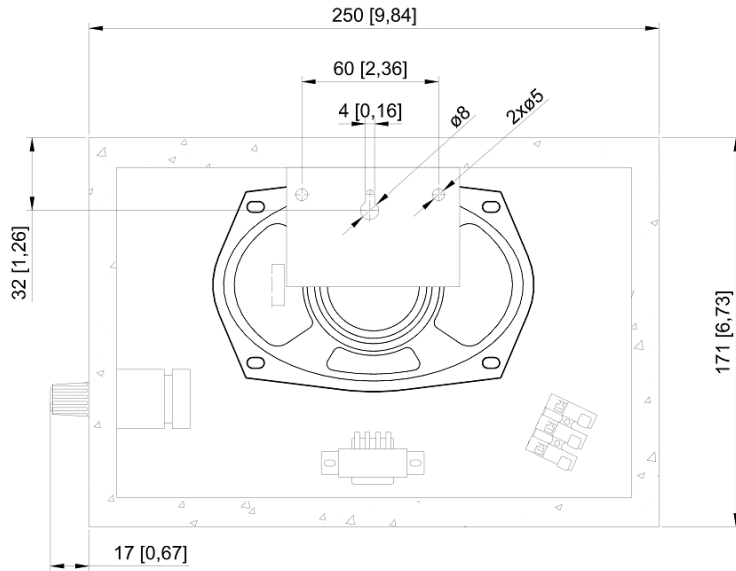

RIGHT VIEW

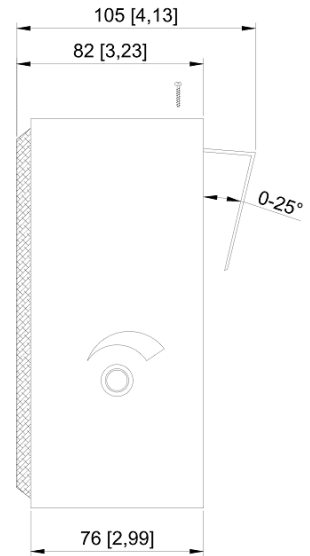

CIRCUIT DIAGRAM

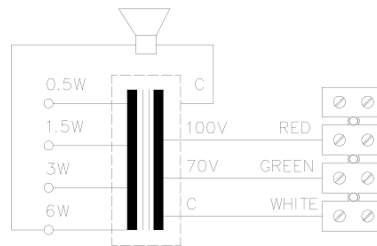

Secondary nominal tapings

C: 6	6,0W
C: 3	3,0W
C: 1,5	1,5W
C: 0,5	0,5W

# Specifications

## GENERAL

Dimensions (mm)	250W x 170H x 88D
Weight	1.2 kg
Mounting	Screws, keyhole
Material/ Color	Particle board / White or walnut
Temperature range	Max. / min. amb. temp 90°C / -40°C
Max. / min. ambient temperature	90°C / -40°C
Connections	Spring clamp
Rated / max. power	6W / 8 W
SPL 1W/1m	90dB
SPL rated power	97dB
Effective freq. range	140 - 20000Hz
Dispersion	(-6dB)1kHz / 4kHz 140° / 80°
Relay (PA override)	24VDC. 16.5mA
Environmental Condition	Protected

## CONNECTIONS

100V line	Terminals: A, B
24VDC relay	Terminals: +, -